COMTREND CORPORATION

VR-3030

Multi-DSL Router

User Manual

Version A1.0, May 28, 2013

261099-016

Preface

This manual provides information related to the installation and operation of this device. The individual reading this manual is presumed to have a basic understanding of telecommunications terminology and concepts.

Important Safety Instructions

With reference to unpacking, installation, use, and maintenance of your electronic device, the following basic guidelines are recommended:

- Do not use or install this product near water, to avoid fire or shock hazard. For example, near a bathtub, kitchen sink or laundry tub, or near a swimming pool. Also, do not expose the equipment to rain or damp areas (e.g. a wet basement).
- Do not connect the power supply cord on elevated surfaces. Allow it to lie freely. There should be no obstructions in its path and no heavy items should be placed on the cord. In addition, do not walk on, step on, or mistreat the cord.
- Use only the power cord and adapter that are shipped with this device.
- To safeguard the equipment against overheating, make sure that all openings in the unit that offer exposure to air are not blocked.
- Avoid using a telephone (other than a cordless type) during an electrical storm. There may be a remote risk of electric shock from lightening. Also, do not use the telephone to report a gas leak in the vicinity of the leak.
- Never install telephone wiring during stormy weather conditions.

CAUTION:

- To reduce the risk of fire, use only No. 26 AWG or larger telecommunication line cord.
- Always disconnect all telephone lines from the wall outlet before servicing or disassembling this equipment.

WARNING

- Disconnect the power line from the device before servicing.
- Power supply specifications are clearly stated in Appendix C - Specifications.

Copyright

Copyright©2013 Comtrend Corporation. All rights reserved. The information contained herein is proprietary to Comtrend Corporation. No part of this document may be translated, transcribed, reproduced, in any form, or by any means without prior written consent of Comtrend Corporation.

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see http://www.gnu.org/licenses/

NOTE:	This document is subject to change without notice.

Protect Our Environment

This symbol indicates that when the equipment has reached the end of its useful life, it must be taken to a recycling centre and processed separate from domestic waste.

The cardboard box, the plastic contained in the packaging, and the parts that make up this router can be recycled in accordance with regionally established regulations. Never dispose of this electronic equipment along with your household waste; you may be subject to penalties or sanctions under the law. Instead, please be responsible and ask for disposal instructions from your local government.

Table of Contents

CHAPTER 1 INTRODUCTION 5

CHAPTER 2 INSTALLATION 6

2.1 HARDWARE SETUP 6

2.2 LED INDICATORS 8

CHAPTER 3 WEB USER INTERFACE 9

3.1 DEFAULT SETTINGS 9

3.2 IP CONFIGURATION 10

3.3 LOGIN PROCEDURE 12

CHAPTER 4 DEVICE INFORMATION 14

4.1 WAN 15

4.2 STATISTICS 16

4.2.1 LAN Statistics 16

4.2.2 WAN Service 17

4.2.3 XTM Statistics 18

4.2.4 xDSL Statistics 19

4.3 ROUTE 24

4.4 ARP 25

4.5 DHCP 25

4.6 NAT SESSION 27

4.7 IGMP PROXY 28

4.8 IPV6 29

4.8.1 IPv6 Info 29

4.8.2 IPv6 Neighbor 30

4.8.3 IPv6 Route 31

4.8.4 Network Map 31

CHAPTER 5 BASIC SETUP 32

5.1 LAYER 2 INTERFACE 32

5.1.1 WAN Service Setup 33

5.2 NAT 34

5.2.1 Virtual Servers 34

5.2.2 Port Triggering 35

5.2.3 DMZ Host 37

5.2.4 IP Address Map 38

5.2.5 IPSEC ALG 40

5.2.6 SIP ALG 41

5.3 LAN 42

5.3.1 LAN IPv6 Autoconfig 45

5.3.2 Static IP Neighbor 48

5.3.3 UPnP 49

CHAPTER 6 ADVANCED SETUP 50

6.1 AUTO-DETECTION SETUP 50

6.2 SECURITY 55

6.2.1 IP Filtering 55

6.2.2 MAC Filtering 58

6.3 PARENTAL CONTROL 60

6.3.1 Time Restriction 60

6.3.2 URL Filter 62

6.4 QUALITY OF SERVICE (QOS) 64

6.4.1 QoS Queue Setup 65

6.4.2 QoS Policer 67

6.4.3 QoS Classification 69

6.5 ROUTING 72

6.5.1 Default Gateway 72

6.5.2 Static Route 73

6.5.3 Policy Routing *74*
6.5.4 RIP *75*
6.6 DNS 76
6.6.1 DNS Server *76*
6.6.2 Dynamic DNS *77*
6.6.3 DNS Entries *78*
6.6.4 DNS Proxy/Relay *79*
6.7 DSL 80
6.8 IP TUNNEL 82
6.8.1 IPv6inIPv4 ..... *82*
6.8.2 IPv4inIPv6 ..... *84*
6.9 CERTIFICATE 85
6.9.1 Local *85*
6.9.2 Trusted CA *87*
6.10 POWER MANAGEMENT 88
6.11 MULTICAST 89

CHAPTER 7 DIAGNOSTICS 91
7.1 DIAGNOSTICS – INDIVIDUAL TESTS 91
7.2 FAULT MANAGEMENT 92
7.3 UPTIME STATUS 93
7.4 PING 94
7.5 TRACE ROUTE 95
7.6 SYSTEM UTILIZATION 96

CHAPTER 8 MANAGEMENT 97
8.1 SETTINGS 97
8.1.1 Backup Settings *97*
8.1.2 Update Settings *98*
8.1.3 Restore Default *98*
8.2 SYSTEM LOG 99
8.3 SNMP AGENT 101
8.4 TR-069 CLIENT 102
8.5 INTERNET TIME 104
8.6 ACCESS CONTROL 105
8.6.1 Passwords *105*
8.6.2 Service Access *107*
8.6.3 IP Address *108*
8.7 UPDATE SOFTWARE 109
8.8 REBOOT 110

CHAPTER 9 LOGOUT 111

APPENDIX A - FIREWALL 112

APPENDIX B - PIN ASSIGNMENTS 115

APPENDIX C - SPECIFICATIONS 116

APPENDIX D - SSH CLIENT 118

APPENDIX E- CONNECTION SETUP 119

Chapter 1 Introduction

The VR-3030 is an 802.11n compliant Multi-DSL router that supports both ADSL2+ and VDSL2. The latter is a brand new standard and technology perfect for triple play (Video, Voice and Data) applications. The VR-3030 comes with one 10/100 Base-T Ethernet port.

The VR-3030 is a cost effective solution designed to meet the needs of ISPs and carriers planning on deploying a single DSL device for covering end users in different loop range areas. Deploying VR-3030 is cost effective for ISPs and carriers because deploying a single CPE DSL device with multiple profile support minimizes the number of required upgrades.

Chapter 2 Installation

2.1 Hardware Setup

Follow the instructions below to complete the hardware setup.

Non-stackable
This device is not stackable – do not place units on top of each other, otherwise damage could occur.

BACK PANEL

The figure below shows the back panel of the device.

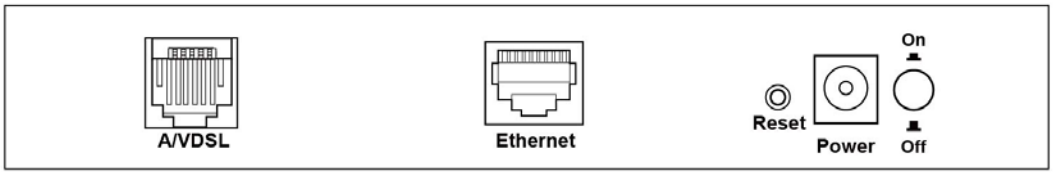

Power ON
Press the power button to the OFF position (OUT). Connect the power adapter to the power port. Attach the power adapter to a wall outlet or other AC source. Press the power button to the ON position (IN). If the Power LED displays as expected then the device is ready for setup (see section 2.2 LED Indicators).

Caution 1:	If the device fails to power up, or it malfunctions, first verify that the power cords are connected securely and then power it on again. If the problem persists, contact technical support.
Caution 2:	Before servicing or disassembling this equipment, disconnect all power cords and telephone lines from their outlets.

Reset Button
Restore the default parameters of the device by pressing the Reset button for 10 seconds. After the device has rebooted successfully, the front panel should display as expected (see section 2.2 LED Indicators for details).

NOTE:	If pressed down for more than 60 seconds, the VR-3030 will go into a firmware update state (CFE boot mode). The firmware can then be updated using an Internet browser pointed to the default IP address.

Ethernet (LAN) Port
Use a 10/100 BASE-T RJ-45 cable to connect to a network device. The ports is auto-sensing MDI/X; so either straight-through or crossover cable can be used.

DSL Port
Connect to an ADSL2/2+ or VDSL with this RJ11 Port. This device contains a micro filter which removes the analog phone signal. If you wish, you can connect a regular telephone to the same line by using a POTS splitter.

2.2 LED Indicators

The front panel LED indicators are shown below and explained in the following table. This information can be used to check the status of the device and its connections.

LED	Color	Mode	Function
POWER	Green	On	The device is powered up.
		Off	The device is powered down.
	Red	On	POST (Power On Self Test) failure or other malfunction. A malfunction is any error of internal sequence or state that will prevent the device from connecting to the DSLAM or passing customer data.
ETHERNET	Green	On	An Ethernet Link is established.
		Off	An Ethernet Link is not established.
		Blink	Data transmitting or receiving over LAN.
DSL	Green	On	xDSL Link is established.
		Off	xDSL Link is not established.
		Blink	fast: xDSL Link is training or data transmitting. slow: xDSL training failed.
INTERNET	Green	On	IP connected and no traffic detected. If an IP or PPPoE session is dropped due to an idle timeout, the light will remain green if an ADSL connection is still present.
		Off	Modem power off, modem in bridged mode or ADSL connection not present. In addition, if an IP or PPPoE session is dropped for any reason, other than an idle timeout, the light is turned off.
		Blink	IP connected and IP Traffic is passing thru the device (either direction)
	Red	On	Device attempted to become IP connected and failed (no DHCP response, no PPPoE response, PPPoE authentication failed, no IP address from IPCP, etc.)

Chapter 3 Web User Interface

This section describes how to access the device via the web user interface (WUI) using an Internet browser such as Internet Explorer (version 5.0 and later).

3.1 Default Settings

The factory default settings of this device are summarized below.

- LAN IP address: 192.168.1.1
- LAN subnet mask: 255.255.255.0
- Administrative access (username: **root**, password: **12345**)
- User access (username: **user**, password: **user**)
- Remote (WAN) access (username: **support**, password: **support**)

Technical Note

During power on, the device initializes all settings to default values. It will then read the configuration profile from the permanent storage section of flash memory. The default attributes are overwritten when identical attributes with different values are configured. The configuration profile in permanent storage can be created via the web user interface or telnet user interface, or other management protocols. The factory default configuration can be restored either by pushing the reset button for more than ten seconds until the power indicates LED blinking or by clicking the Restore Default Configuration option in the Restore Settings screen.

3.2 IP Configuration

DHCP MODE

When the VR-3030 powers up, the onboard DHCP server will switch on. Basically, the DHCP server issues and reserves IP addresses for LAN devices, such as your PC.

To obtain an IP address from the DCHP server, follow the steps provided below.

NOTE:	The following procedure assumes you are running Windows XP. However, the general steps involved are similar for most operating systems (OS). Check your OS support documentation for further details.

STEP 1: From the Network Connections window, open Local Area Connection (*You may also access this screen by double-clicking the Local Area Connection icon on your taskbar*). Click the **Properties** button.

STEP 2: Select Internet Protocol (TCP/IP) **and click the** Properties button.

STEP 3: Select Obtain an IP address automatically as shown below.

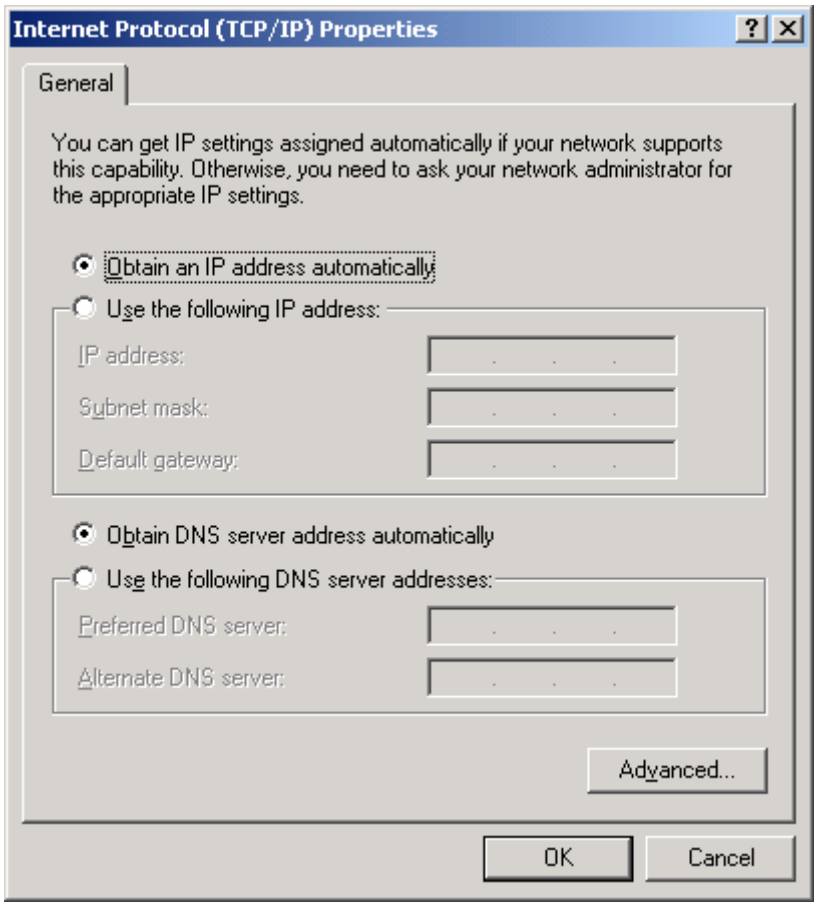

STEP 4: Click **OK** to submit these settings.

If you experience difficulty with DHCP mode, you can try static IP mode instead.

STATIC IP MODE

In static IP mode, you assign IP settings to your PC manually.

Follow these steps to configure your PC IP address to use subnet 192.168.1.x.

NOTE:	The following procedure assumes you are running Windows XP. However, the general steps involved are similar for most operating systems (OS). Check your OS support documentation for further details.

STEP 1: From the Network Connections window, open Local Area Connection (*You may also access this screen by double-clicking the Local Area Connection icon on your taskbar*). Click the **Properties** button.

STEP 2: Select Internet Protocol (TCP/IP) **and click the** Properties button.

STEP 3: Change the IP address to the 192.168.1.x (1<x<255) subnet with subnet mask of 255.255.255.0. The screen should now display as shown below.

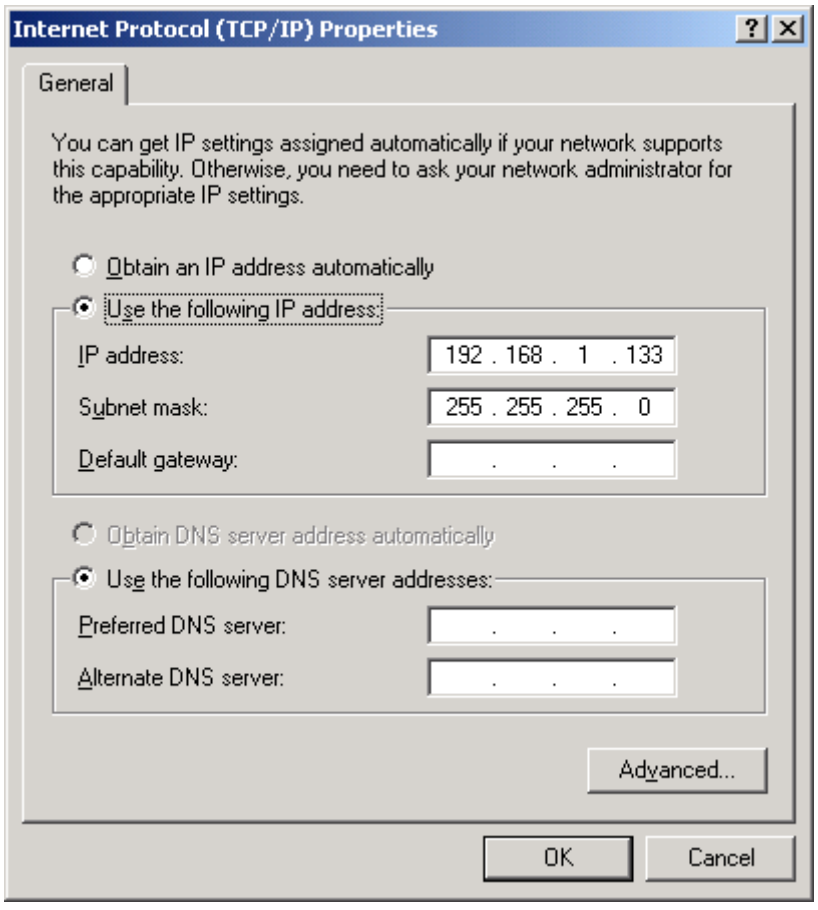

STEP 4: Click **OK** to submit these settings.

3.3 Login Procedure

Perform the following steps to login to the web user interface.

NOTE:	The default settings can be found in section 3.1 Default Settings.

STEP 1: Start the Internet browser and enter the default IP address for the device in the Web address field. For example, if the default IP address is 192.168.1.1, type http://192.168.1.1.

NOTE:	For local administration (i.e. LAN access), the PC running the browser must be attached to the Ethernet, and not necessarily to the device. For remote access (i.e. WAN), use the IP address shown on the Device Information screen and login with remote username and password.

STEP 2: A dialog box will appear, such as the one below. Enter the default username and password, as defined in section 3.1 Default Settings.

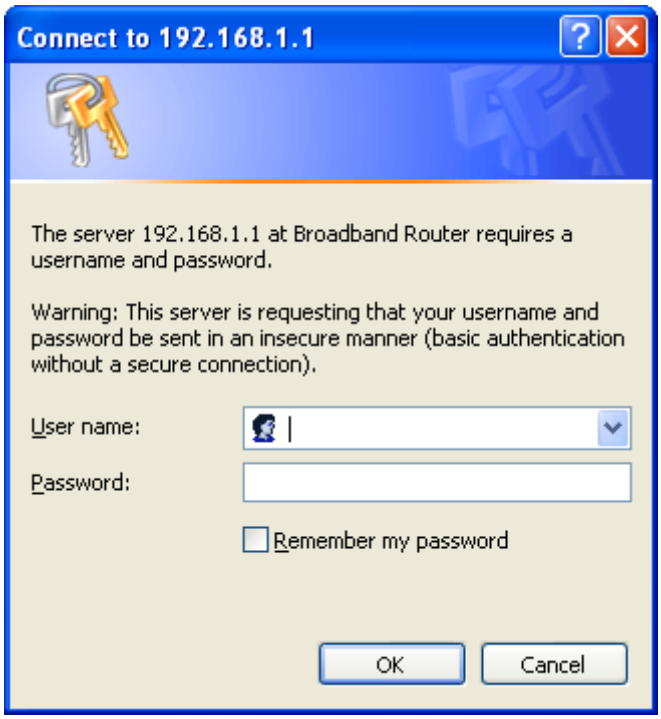

Click **OK** to continue.

NOTE:	The login password can be changed later (see section 8.6.1 Passwords).

STEP 3: After successfully logging in for the first time, you will reach this screen.

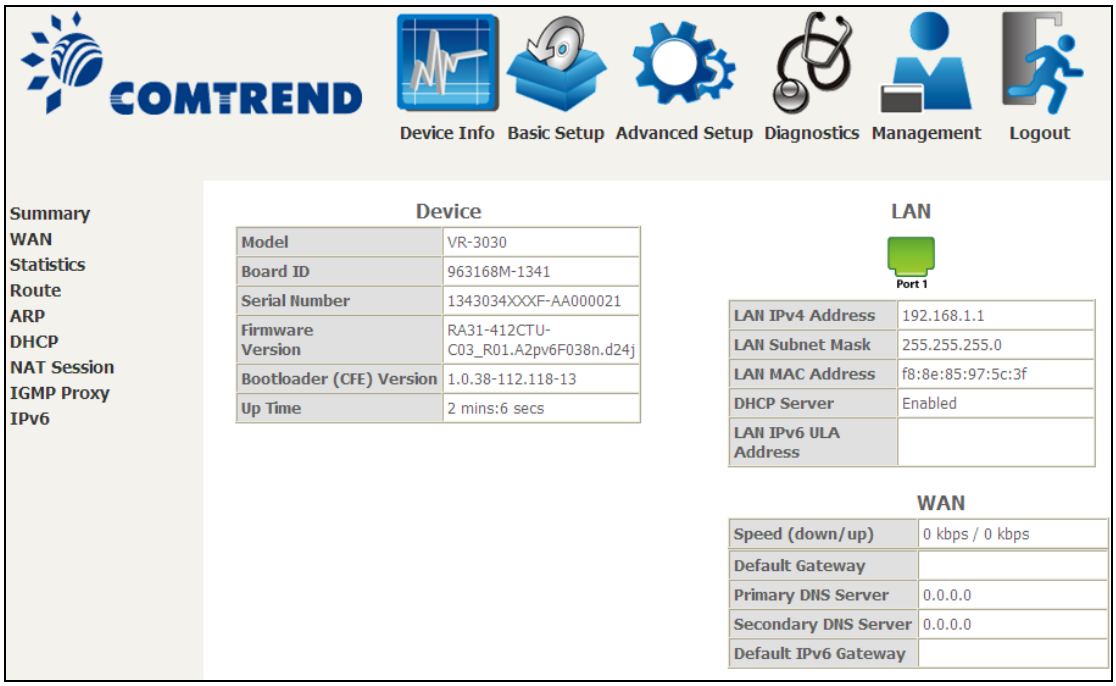

You can also reach this page by clicking on the following icon located at the top of the screen.

Chapter 4 Device Information

You can reach this page by clicking on the following icon located at the top of the screen.

The web user interface window is divided into two frames, the main menu (at left) and the display screen (on the right). The main menu has several options and selecting each of these options opens a submenu with more selections.

NOTE:	The menu items shown are based upon the configured connection(s) and user account privileges. For example, if NAT and Firewall are enabled, the main menu will display the NAT and Security submenus. If either is disabled, their corresponding menu(s) will also be disabled.

Device Info is the first selection on the main menu so it will be discussed first. Subsequent chapters will introduce the other main menu options in sequence.

The Device Info Summary screen displays at startup.

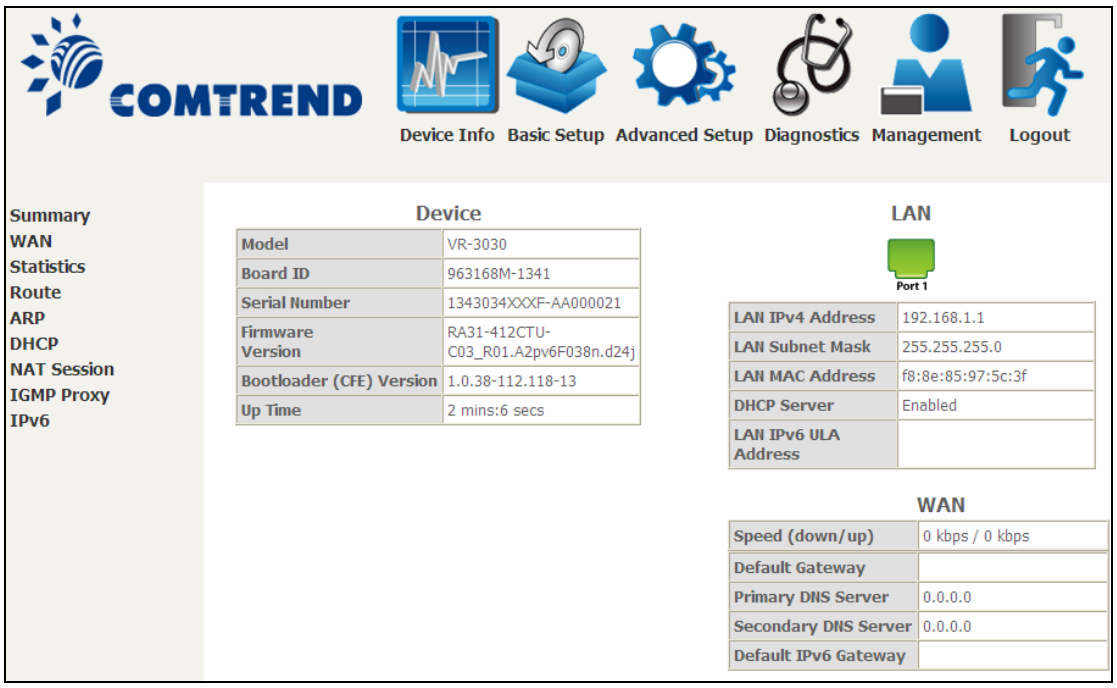

This screen shows hardware, software, IP settings and other related information.

4.1 WAN

Select WAN from the Device Info submenu to display the configured PVC(s).

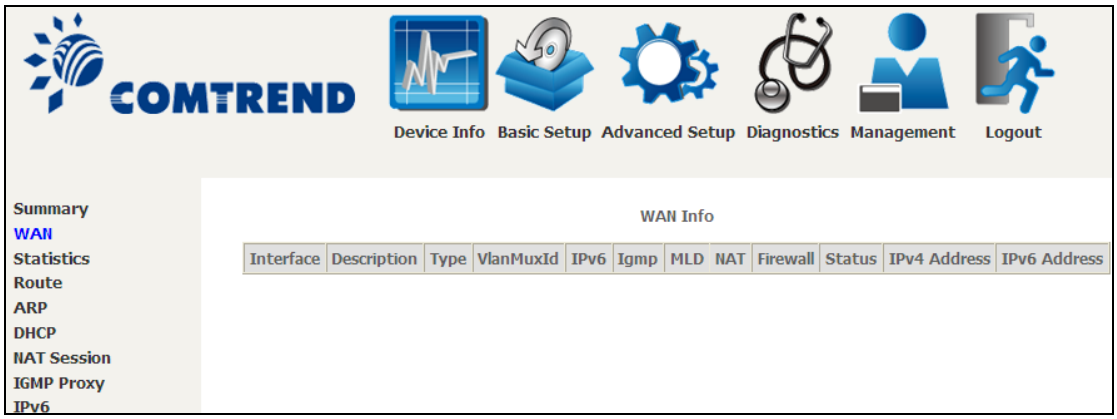

Heading	Description
Interface	Name of the interface for WAN
Description	Name of the WAN connection
Type	Shows the connection type
VlanMuxId	Shows 802.1Q VLAN ID
IPv6	Shows WAN IPv6 status
IGMP	Shows Internet Group Management Protocol (IGMP) status
MLD	Shows Multicast Listener Discovery (MLD) status
NAT	Shows Network Address Translation (NAT) status
Firewall	Shows the status of Firewall
Status	Lists the status of DSL link
IPv4 Address	Shows WAN IPv4 address
IPv6 Address	Shows WAN IPv6 address

4.2 Statistics

This selection provides LAN, WAN, ATM and xDSL statistics.

NOTE:	These screens are updated automatically every 15 seconds. Click **Reset Statistics** to perform a manual update.

4.2.1 LAN Statistics

This screen shows data traffic statistics for each LAN interface.

Heading		Description
Interface		LAN interface(s)
Received/Transmitted:	- Bytes - Pkts - Errs - Drops	Number of Bytes Number of Packets Number of packets with errors Number of dropped packets

4.2.2 WAN Service

This screen shows data traffic statistics for each WAN interface.

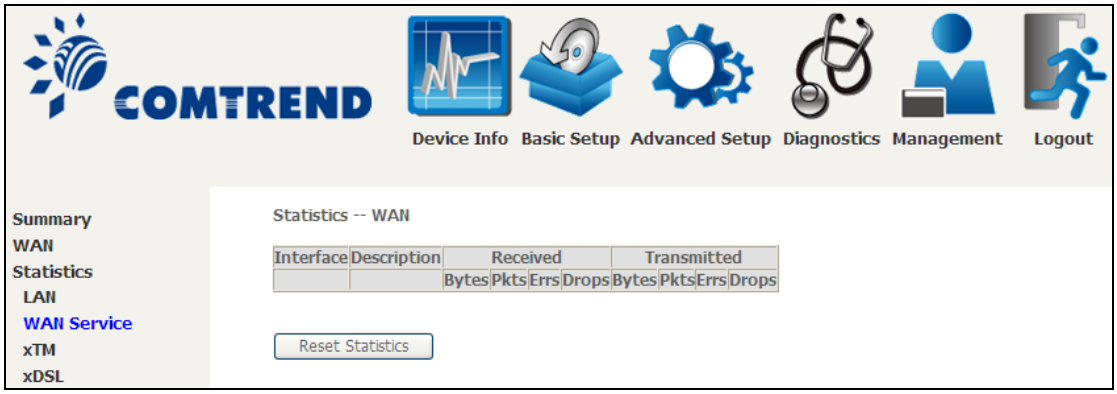

Heading	Description
Interface	WAN interfaces
Description	WAN service label
Received/Transmitted - Bytes - Pkts - Errs - Drops	Number of Bytes Number of Packets Number of packets with errors Number of dropped packets

4.2.3 XTM Statistics

The following figure shows ATM (Asynchronous Transfer Mode)/PTM(Packet Transfer Mode) statistics.

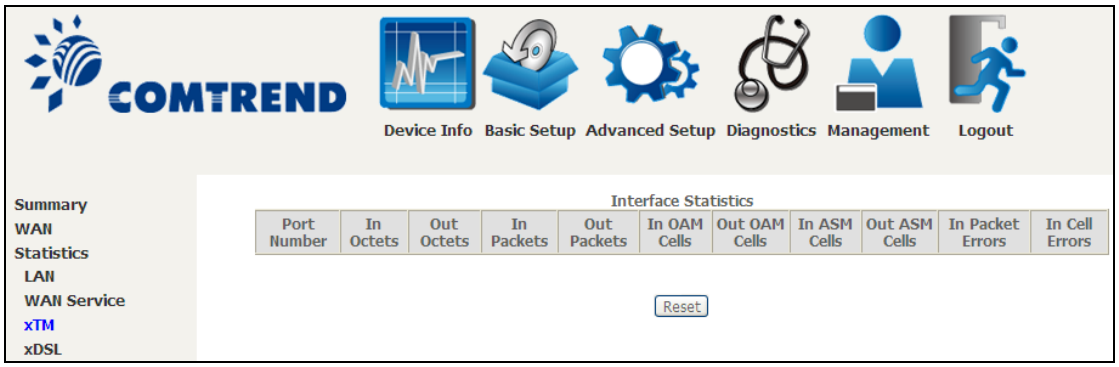

ATM Interface Statistics

Heading	Description
Port Number	ATM PORT (0-3)
In Octets	Number of octets received over the interface
Out Octets	Number of octets transmitted over the interface
In Packets	Number of packets received over the interface
Out Packets	Number of packets transmitted over the interface
In OAM Cells	Number of OAM Cells received over the interface
Out OAM Cells	Number of OAM Cells transmitted over the interface
In ASM Cells	Number of ASM Cells received over the interface
Out ASM Cells	Number of ASM Cells transmitted over the interface
In Packet Errors	Number of packets in Error
In Cell Errors	Number of cells in Error

4.2.4 xDSL Statistics

The xDSL Statistics screen displays information corresponding to the xDSL type. The two examples below (VDSL & ADSL) show this variation.

VDSL

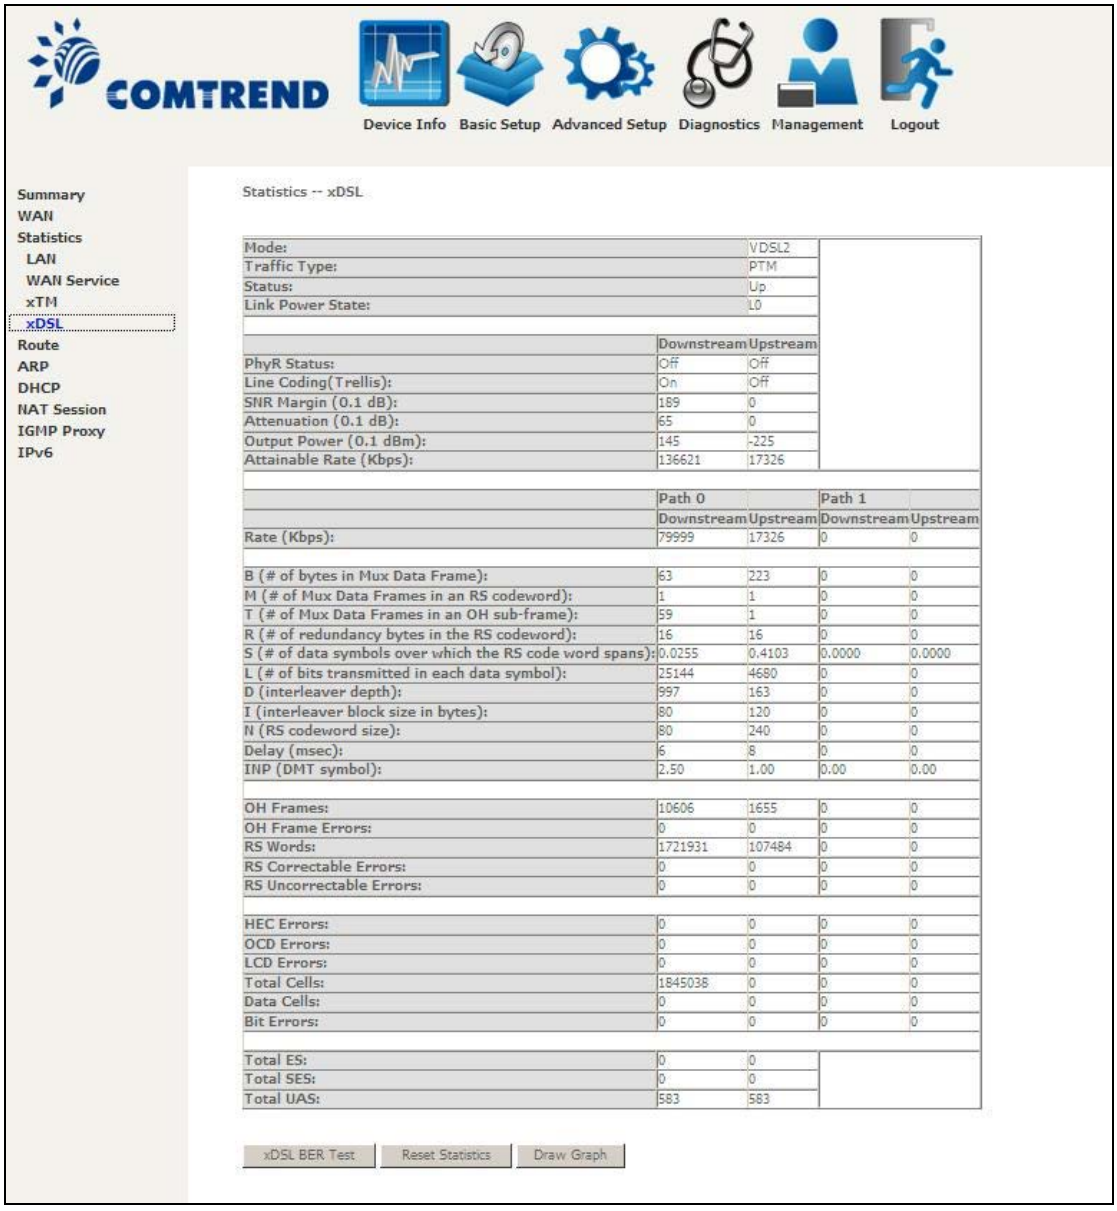

ADSL

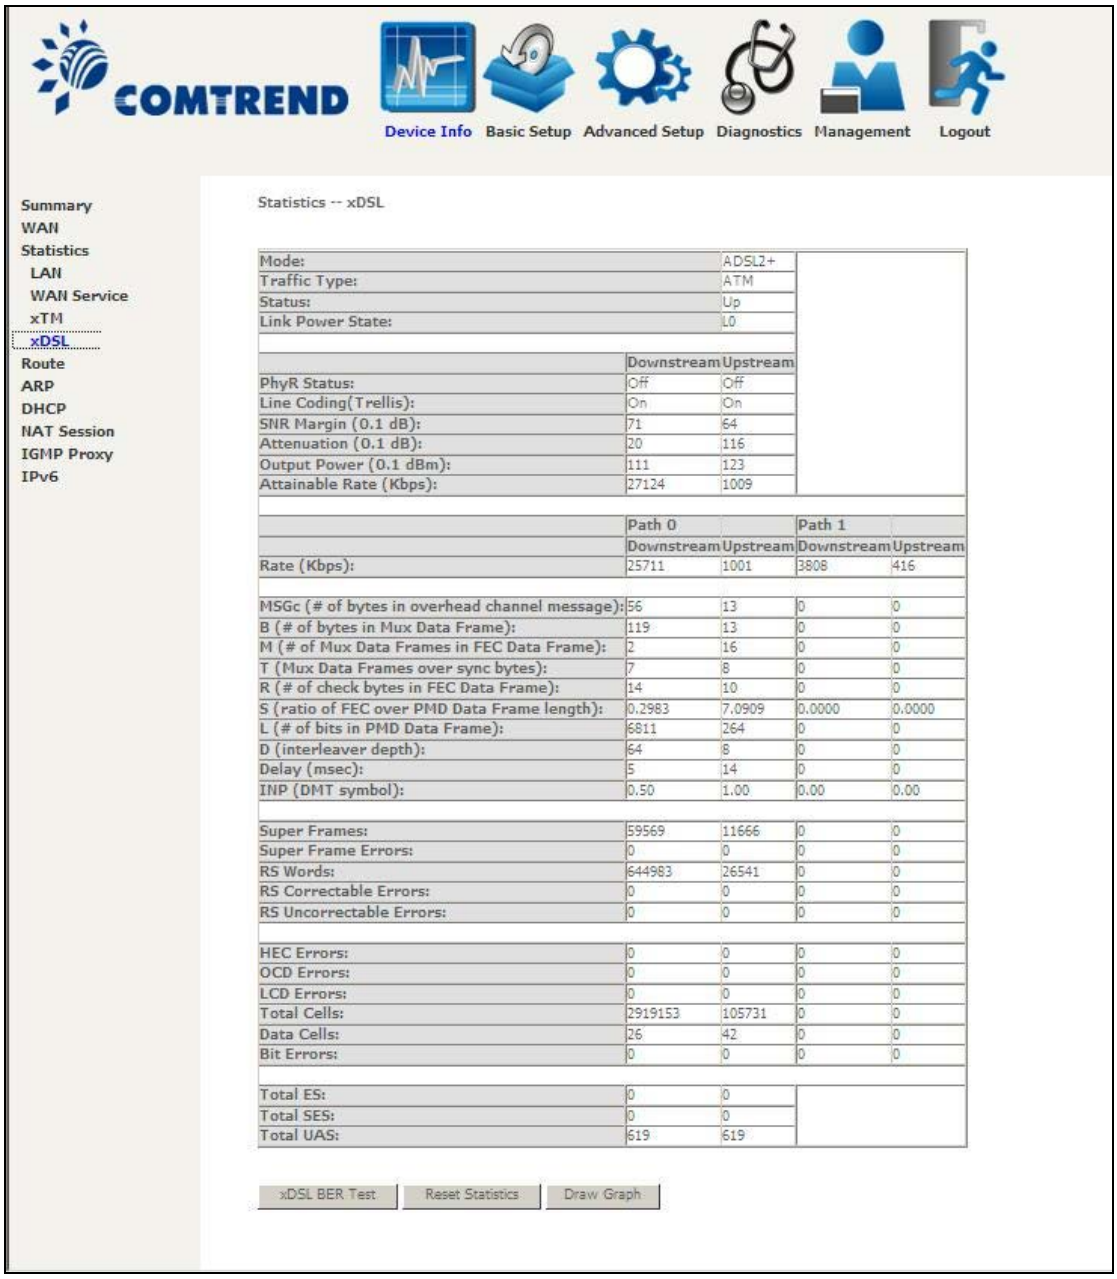

Click the **Reset Statistics** button to refresh this screen.

Field	Description
Mode	G.Dmt, G.lite, T1.413, ADSL2, ADSL2+
Traffic Type	Channel type Interleave or Fast
Status	Lists the status of the DSL link
Link Power State	Link output power state
Line Coding (Trellis)	Trellis On/Off
SNR Margin (0.1 dB)	Signal to Noise Ratio (SNR) margin
Attenuation (0.1 dB)	Estimate of average loop attenuation in the downstream direction
Output Power (0.1 dBm)	Total upstream output power

Field	Description
Attainable Rate (Kbps)	The sync rate you would obtain
Rate (Kbps)	Current sync rates downstream/upstream

In VDSL mode, the following section is inserted.

B	Number of bytes in Mux Data Frame
M	Number of Mux Data Frames in a RS codeword
T	Number of Mux Data Frames in an OH sub-frame
R	Number of redundancy bytes in the RS codeword
S	Number of data symbols the RS codeword spans
L	Number of bits transmitted in each data symbol
D	The interleaver depth
I	The interleaver block size in bytes
N	RS codeword size
Delay	The delay in milliseconds (msec)
INP	DMT symbol

In ADSL2+ mode, the following section is inserted.

MSGc	Number of bytes in overhead channel message
B	Number of bytes in Mux Data Frame
M	Number of Mux Data Frames in FEC Data Frame
T	Mux Data Frames over sync bytes
R	Number of check bytes in FEC Data Frame
S	Ratio of FEC over PMD Data Frame length
L	Number of bits in PMD Data Frame
D	The interleaver depth
Delay	The delay in milliseconds (msec)
INP	DMT symbol

In G.DMT mode, the following section is inserted.

K	Number of bytes in DMT frame
R	Number of check bytes in RS code word
S	RS code word size in DMT frame
D	The interleaver depth
Delay	The delay in milliseconds (msec)

Super Frames	Total number of super frames
Super Frame Errors	Number of super frames received with errors
RS Words	Total number of Reed-Solomon code errors
RS Correctable Errors	Total Number of RS with correctable errors
RS Uncorrectable Errors	Total Number of RS words with uncorrectable errors

HEC Errors	Total Number of Header Error Checksum errors
OCD Errors	Total Number of Out-of-Cell Delineation errors
LCD Errors	Total number of Loss of Cell Delineation
Total Cells	Total number of ATM cells (including idle + data cells)
Data Cells	Total number of ATM data cells
Bit Errors	Total number of bit errors

Total ES	Total Number of Errored Seconds
Total SES	Total Number of Severely Errored Seconds
Total UAS	Total Number of Unavailable Seconds

xDSL BER TEST

Click **xDSL BER Test** on the xDSL Statistics screen to test the Bit Error Rate (BER). A small pop-up window will open after the button is pressed, as shown below.

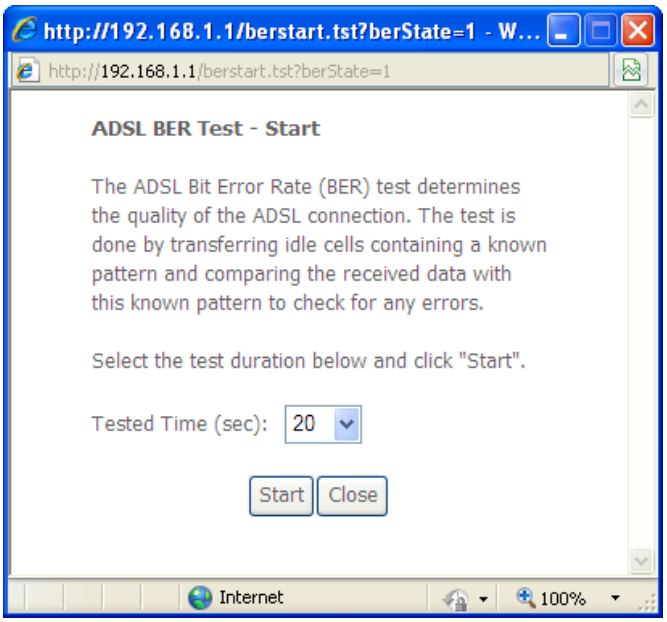

Click **Start** to start the test or click **Close** to cancel the test. After the BER testing is complete, the pop-up window will display as follows.

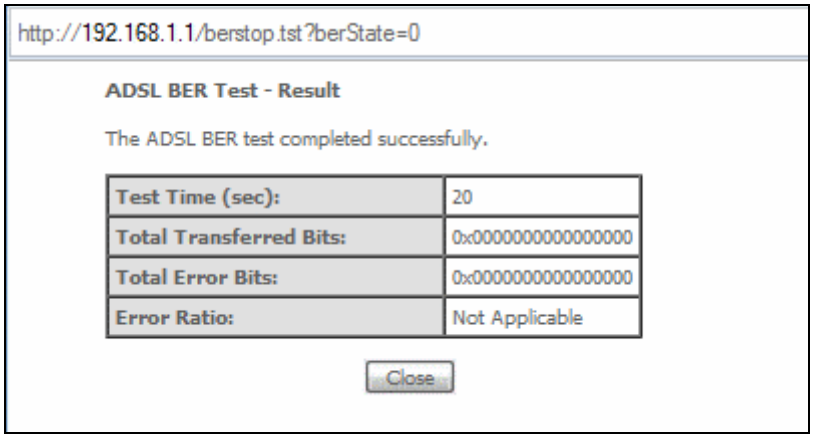

xDSL TONE GRAPH

Click **Draw Tone Graph** on the xDSL Statistics screen and a pop-up window will display the xDSL bits per tone status, as shown below.

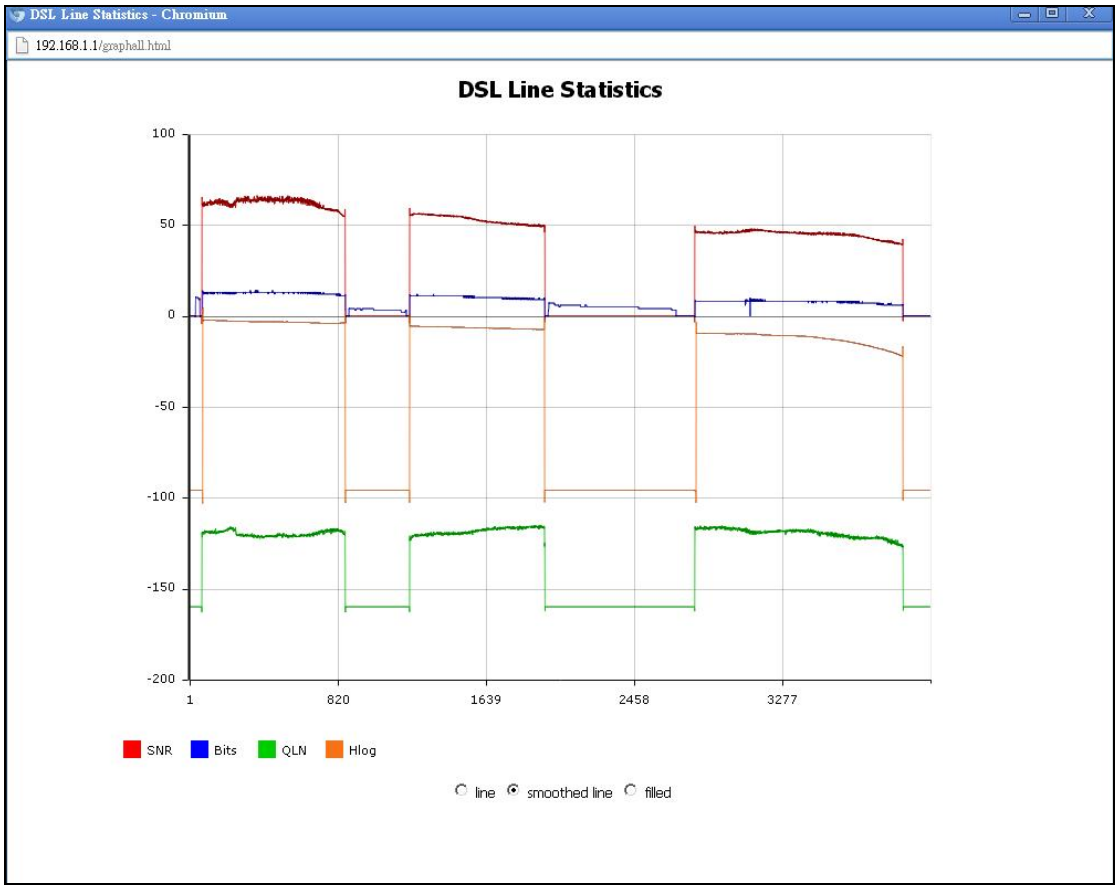

4.3 Route

Choose **Route** to display the routes that the VR-3030 has found.

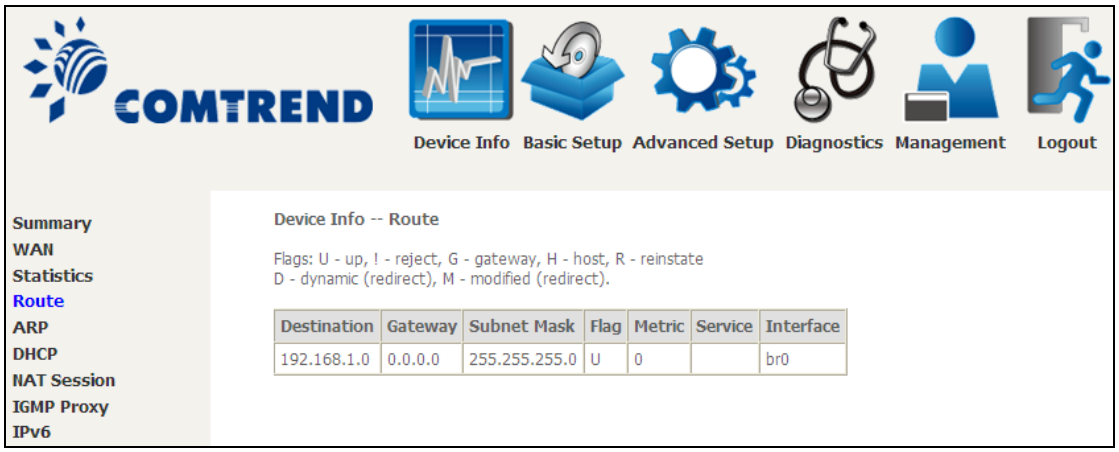

Field	Description
Destination	Destination network or destination host
Gateway	Next hop IP address
Subnet Mask	Subnet Mask of Destination
Flag	U: route is up !: reject route G: use gateway H: target is a host R: reinstate route for dynamic routing D: dynamically installed by daemon or redirect M: modified from routing daemon or redirect
Metric	The 'distance' to the target (usually counted in hops). It is not used by recent kernels, but may be needed by routing daemons.
Service	Shows the WAN connection label
Interface	Shows connection interfaces

4.4 ARP

Click **ARP** to display the ARP information.

Field	Description
IP address	Shows IP address of host pc
Flags	Complete, Incomplete, Permanent, or Publish
HW Address	Shows the MAC address of host pc
Device	Shows the connection interface

4.5 DHCP

Click **DHCP** to display all DHCP Leases.

Field	Description
IPv6 Address	Shows IP address of device/host/PC
MAC Address	Shows the Ethernet MAC address of the device/host/PC
IP Address	Shows IP address of device/host/PC
Expires In	Shows how much time is left for each DHCP Lease

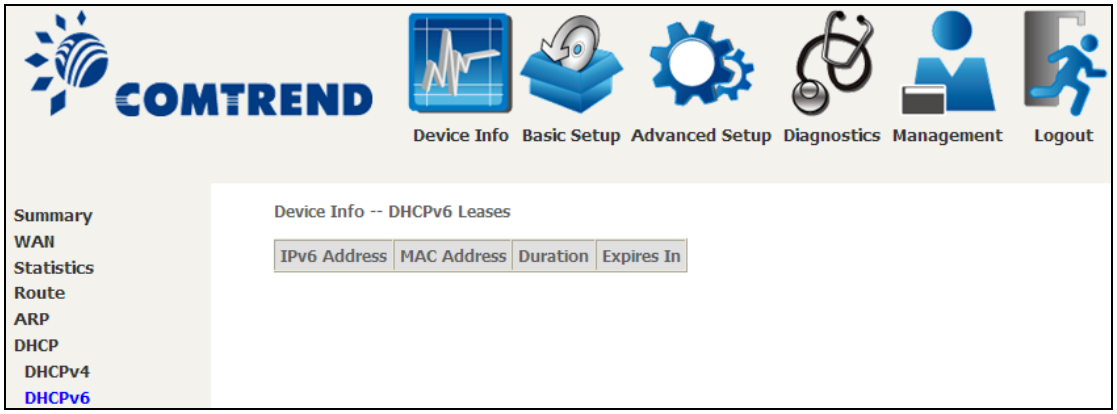

Field	Description
IPv6 Address	Shows IP address of device/host/PC
MAC Address	Shows the Ethernet MAC address of the device/host/PC
Duration	Shows leased time in hours
Expires In	Shows how much time is left for each DHCP Lease

4.6 NAT Session

Click the “Show All” button to display the following.

NAT Session

Press "Show Less" will show NAT session information on WAN side only.

Source IP	Source Port	Destination IP	Destination Port	Protocol	Timeout
192.168.1.2	54927	192.168.1.1	53	udp	8
192.168.1.2	61978	192.168.1.1	53	udp	29
192.168.1.2	137	192.168.1.255	137	udp	16
192.168.1.2	58233	192.168.1.1	53	udp	23
192.168.1.2	68	192.168.1.1	67	udp	15
192.168.1.2	3700	192.168.1.1	80	tcp	4
192.168.1.2	3567	192.168.1.1	80	tcp	19
192.168.1.2	61516	192.168.1.1	53	udp	26
192.168.1.2	3699	192.168.1.1	80	tcp	4
192.168.1.2	55639	192.168.1.1	53	udp	8
192.168.1.2	3557	192.168.1.1	80	tcp	13

Refresh Show Less

Field	Description
Source IP	The source IP from which the NAT session is established
Source Port	The source port from which the NAT session is established
Destination IP	The IP which the NAT session was connected to
Destination Port	The port which the NAT session was connected to
Protocol	The Protocol used in establishing the particular NAT session
Timeout	The time remaining for the TCP/UDP connection to be active

4.7 IGMP Proxy

Field	Description
Interface	The Source interface from which the IGMP report was received
WAN	The WAN interface from which the multicast traffic is received
Groups	The destination IGMP group address
Member	The Source IP from which the IGMP report was received
Timeout	The time remaining before the IGMP report expires

4.8 IPv6

4.8.1 IPv6 Info

Field	Description
Interface	WAN interface with IPv6 enabled
Status	Connection status of the WAN interface
Address	IPv6 Address of the WAN interface
Prefix	Prefix received/configured on the WAN interface
Device Link-local Address	The CPE's LAN Address
Default IPv6 Gateway	The default WAN IPv6 gateway
IPv6 DNS Server	The IPv6 DNS servers received from the WAN interface / configured manually

4.8.2 IPv6 Neighbor

Field	Description
IPv6 Address	Ipv6 address of the device(s) found
Flags	Status of the neighbor device
HW Address	MAC address of the neighbor device
Device	Interface from which the device is located

4.8.3 IPv6 Route

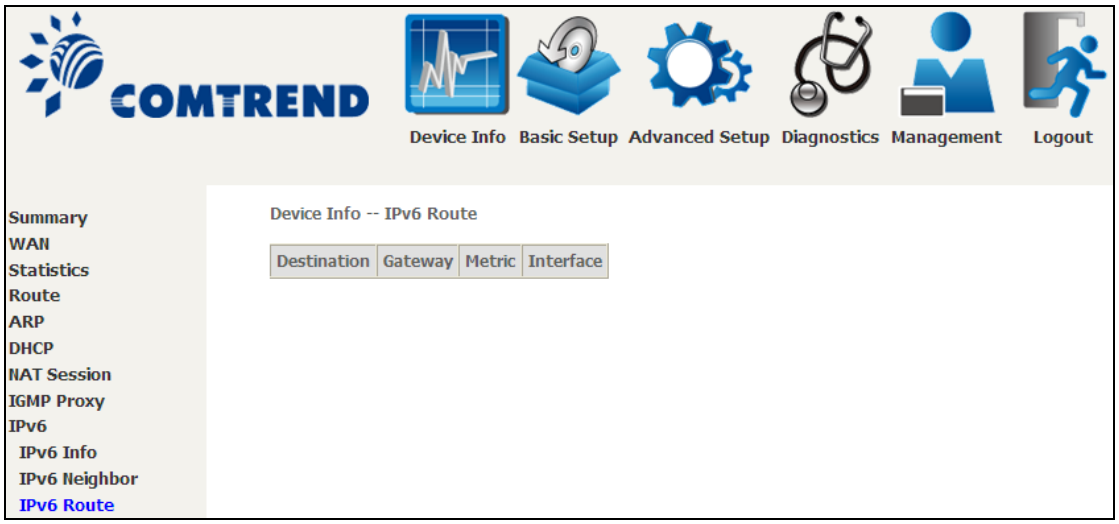

Field	Description
Destination	Destination IP Address
Gateway	Gateway address used for destination IP
Metric	Metric specified for gateway
Interface	Interface used for destination IP

4.8.4 Network Map

The network map is a graphical representation of router's wan status and LAN devices. The feature is only available using a non-IE browser.

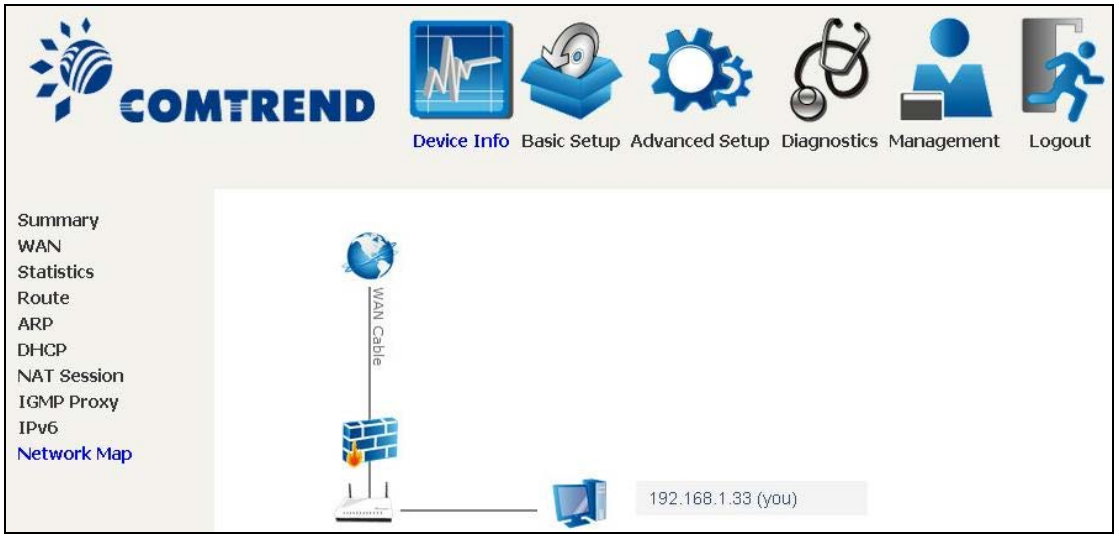

Chapter 5 Basic Setup

You can reach this page by clicking on the following icon located at the top of the screen.



5.1 Layer 2 Interface

Add or remove ATM, PTM and ETH WAN interface connections here.

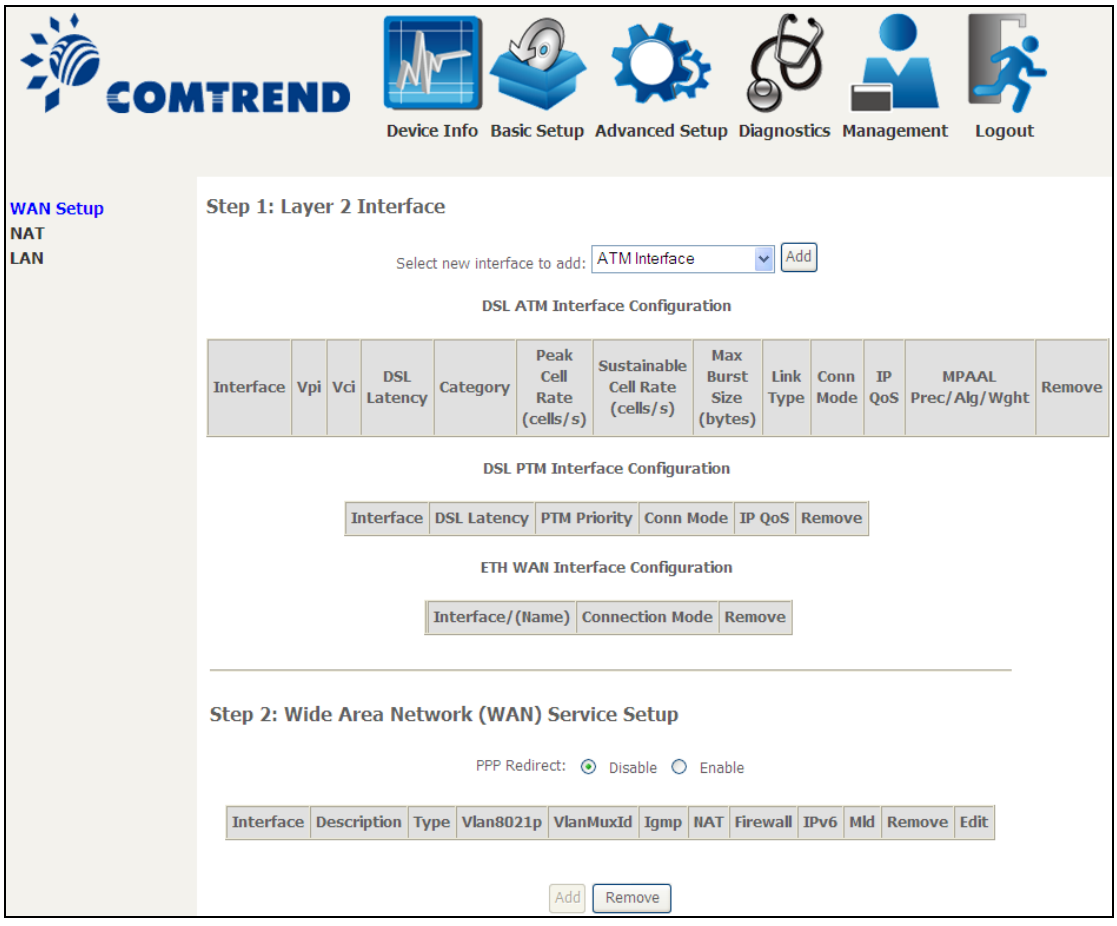

Click **Add** to create a new ATM interface (see Appendix E - Connection Setup).

NOTE:	Up to 8 ATM interfaces can be created and saved in flash memory.

To remove a connection, select its Remove column radio button and click **Remove**.

5.1.1 WAN Service Setup

This screen allows for the configuration of WAN interfaces.

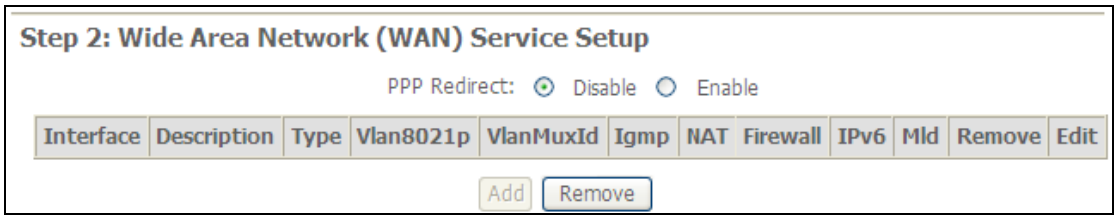

Click the **Add** button to create a new connection. For connections on ATM or ETH WAN interfaces see Appendix E - Connection Setup.

To remove a connection, select its Remove column radio button and click **Remove.**

Heading	Description
Interface	Name of the interface for WAN
Description	Name of the WAN connection
Type	Shows the connection type
Vlan8021p	VLAN ID is used for VLAN Tagging (IEEE 802.1Q)
VlanMuxId	Shows 802.1Q VLAN ID
IGMP	Shows Internet Group Management Protocol (IGMP) status
NAT	Shows Network Address Translation (NAT) status
Firewall	Shows the Security status
IPv6	Shows the WAN IPv6 address
MLD	Shows Multicast Listener Discovery (MLD) status
Remove	Select interfaces to remove

To remove a connection, select its Remove column radio button and click **Remove.**

NOTE: ETH and ATM service connections cannot coexist. In Default Mode, up to 8 WAN connections can be configured; while VLAN Mux Connection Mode supports up to 16 WAN connections.

NOTE: Up to 16 PVC profiles can be configured and saved in flash memory. Also, ETH and PTM/ATM service connections cannot coexist.

5.2 NAT

To display this option, NAT must be enabled in at least one PVC shown on the Advanced Setup WAN screen. *NAT is not an available option in Bridge mode*.

5.2.1 Virtual Servers

Virtual Servers allow you to direct incoming traffic from the WAN side (identified by Protocol and External port) to the internal server with private IP addresses on the LAN side. The Internal port is required only if the external port needs to be converted to a different port number used by the server on the LAN side.
A maximum of 32 entries can be configured.

To add a Virtual Server, click **Add**. The following will be displayed.

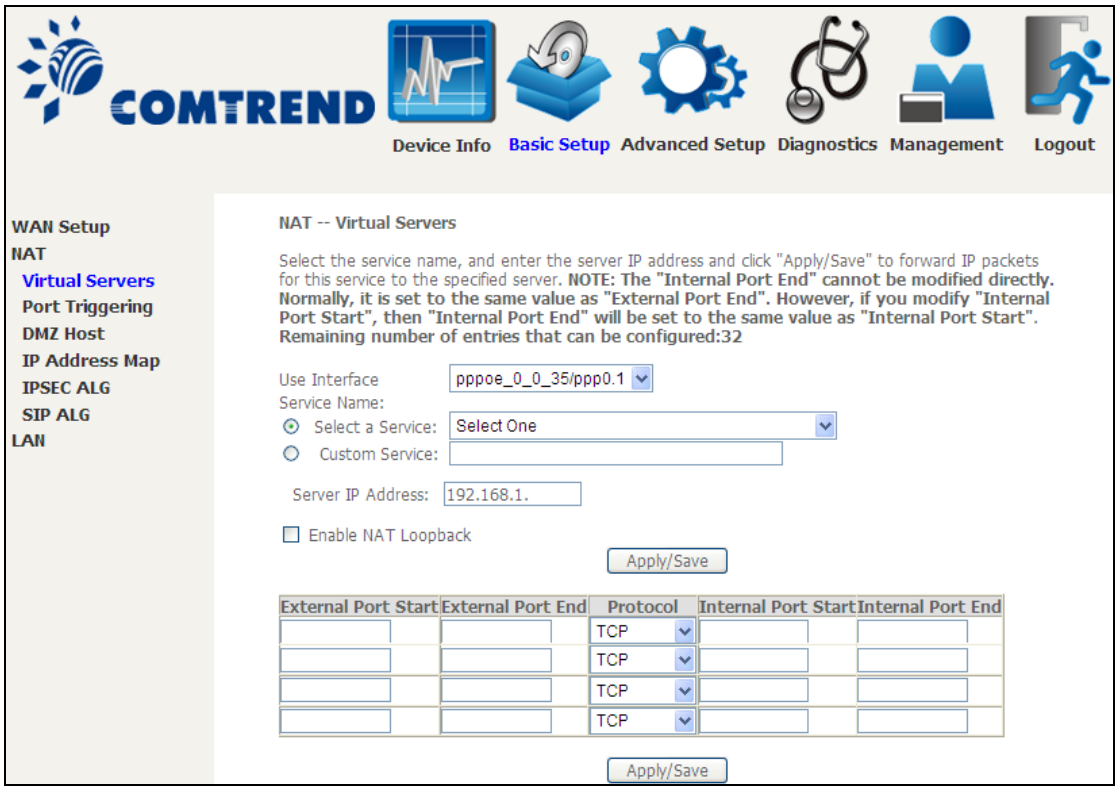

Consult the table below for field and header descriptions.

Field / Header	Description
Use Interface	Select a WAN interface from the drop-down box.
Select a Service **Or** Custom Service	User should select the service from the list. **Or** User can enter the name of their choice.
Server IP Address	Enter the IP address for the server.
Enable NAT Loopback	Allows local machines to access virtual server via WAN IP Address
External Port Start	Enter the starting external port number (when you select Custom Server). When a service is selected, the port ranges are automatically configured.
External Port End	Enter the ending external port number (when you select Custom Server). When a service is selected, the port ranges are automatically configured.
Protocol	TCP, TCP/UDP, or UDP.
Internal Port Start	Enter the internal port starting number (when you select Custom Server). When a service is selected the port ranges are automatically configured
Internal Port End	Enter the internal port ending number (when you select Custom Server). When a service is selected, the port ranges are automatically configured.

5.2.2 Port Triggering

Some applications require that specific ports in the firewall be opened for access by the remote parties. Port Triggers dynamically 'Open Ports' in the firewall when an application on the LAN initiates a TCP/UDP connection to a remote party using the 'Triggering Ports'. The Router allows the remote party from the WAN side to establish new connections back to the application on the LAN side using the 'Open Ports'. A maximum 32 entries can be configured.

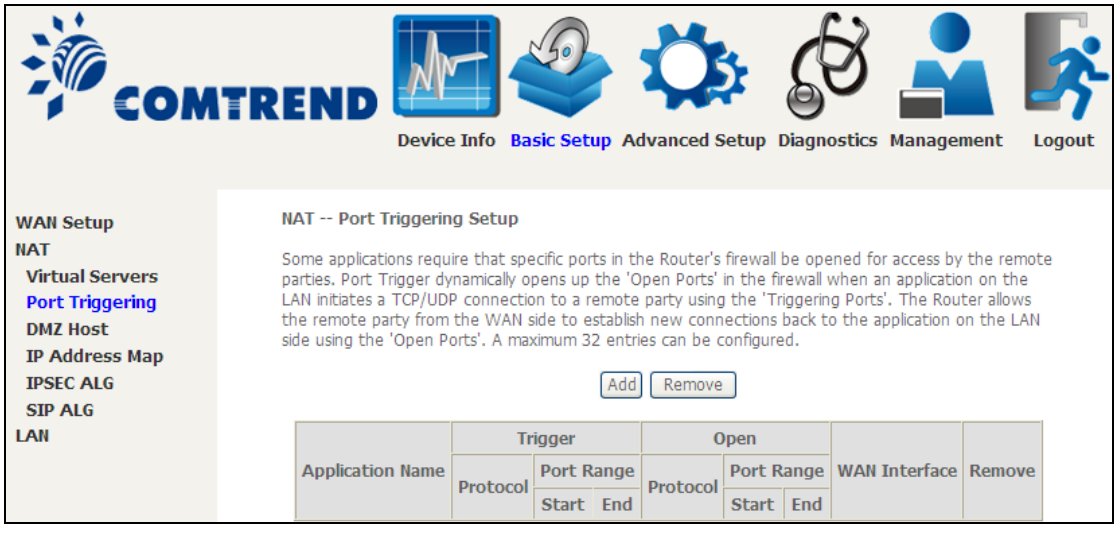

To add a Trigger Port, click **Add**. The following will be displayed.

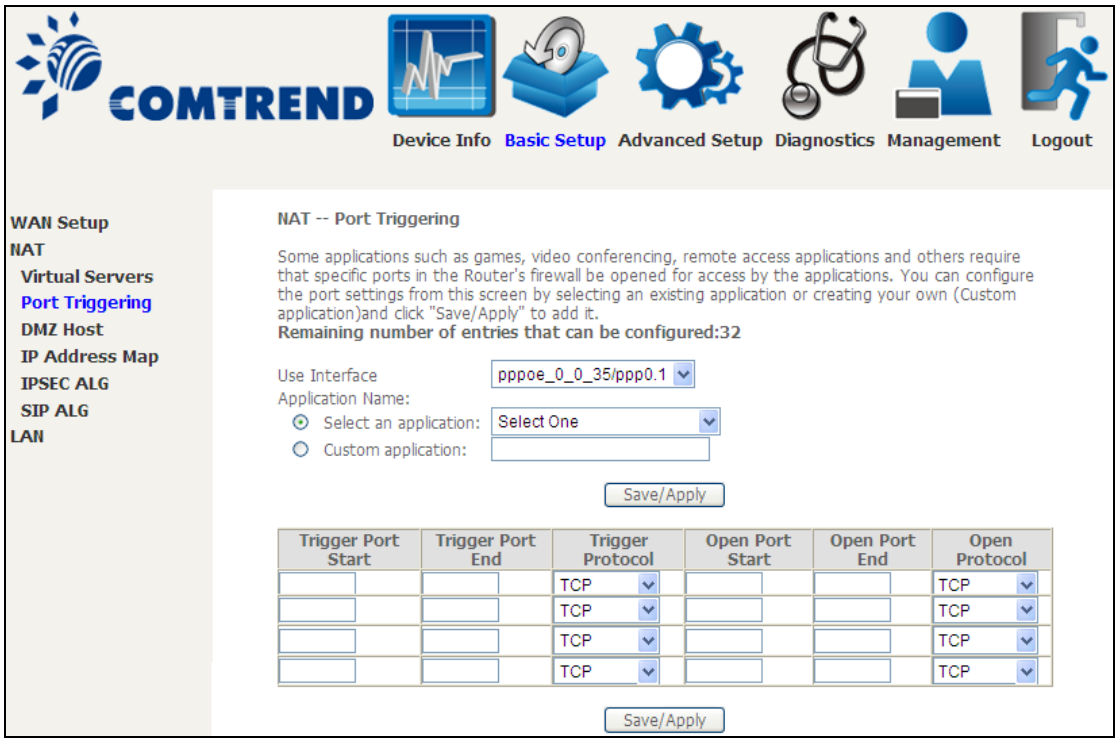

Click Save/Apply to save and apply the settings.

Consult the table below for field and header descriptions.

Field / Header	Description
Use Interface	Select a WAN interface from the drop-down box.
Select an Application **Or** Custom Application	User should select the application from the list. **Or** User can enter the name of their choice.
Trigger Port Start	Enter the starting trigger port number (when you select custom application). When an application is selected, the port ranges are automatically configured.
Trigger Port End	Enter the ending trigger port number (when you select custom application). When an application is selected, the port ranges are automatically configured.
Trigger Protocol	TCP, TCP/UDP, or UDP.
Open Port Start	Enter the starting open port number (when you select custom application). When an application is selected, the port ranges are automatically configured.
Open Port End	Enter the ending open port number (when you select custom application). When an application is selected, the port ranges are automatically configured.
Open Protocol	TCP, TCP/UDP, or UDP.

5.2.3 DMZ Host

The DSL router will forward IP packets from the WAN that do not belong to any of the applications configured in the Virtual Servers table to the DMZ host computer.

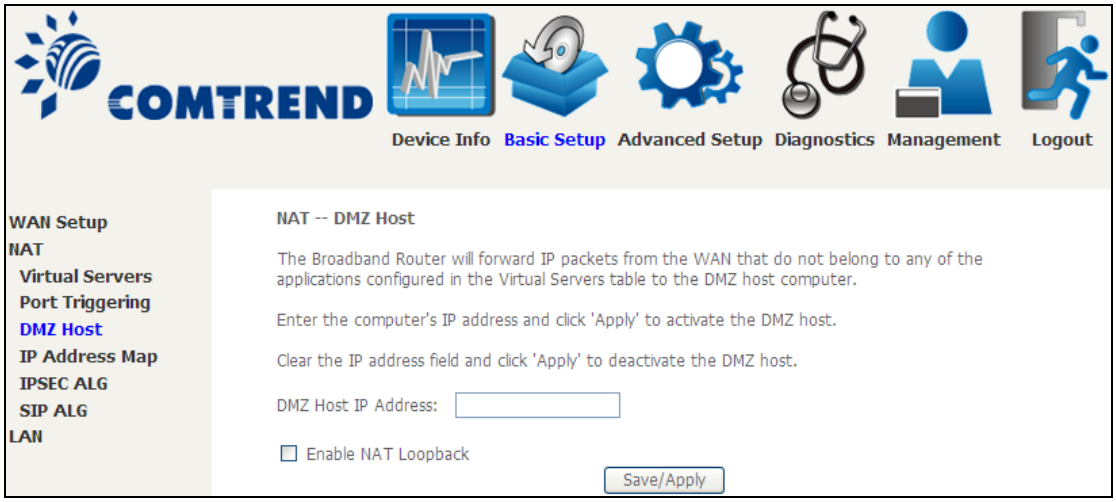

To **Activate** the DMZ host, enter the DMZ host IP address and click **Save/Apply**.

To **Deactivate** the DMZ host, clear the IP address field and click **Save/Apply**.

Enable NAT Loopback allows PC on the LAN side to access servers in the LAN network via the router's WAN IP.

5.2.4 IP Address Map

Mapping Local IP (LAN IP) to some specified Public IP (WAN IP).

Field / Header	Description
Rule	The number of the rule
Type	Mapping type from local to public.
Local Start IP	The beginning of the local IP
Local End IP	The ending of the local IP
Public Start IP	The beginning of the public IP
Public End IP	The ending of the public IP
Remove	Remove this rule

Click the **Add** button to display the following.

Select a Service, then click the **Save/Apply** button.

One to One: mapping one local IP to a specific public IP

Many to one: mapping a range of local IP to a specific public IP

Many to many(Overload): mapping a range of local IP to a different range of public IP

Many to many(No Overload): mapping a range of local IP to a same range of public IP

5.2.5 IPSEC ALG

IPSEC ALG provides multiple VPN passthrough connection support, allowing different clients on LAN side to establish a secured IP Connection to the WAN server.

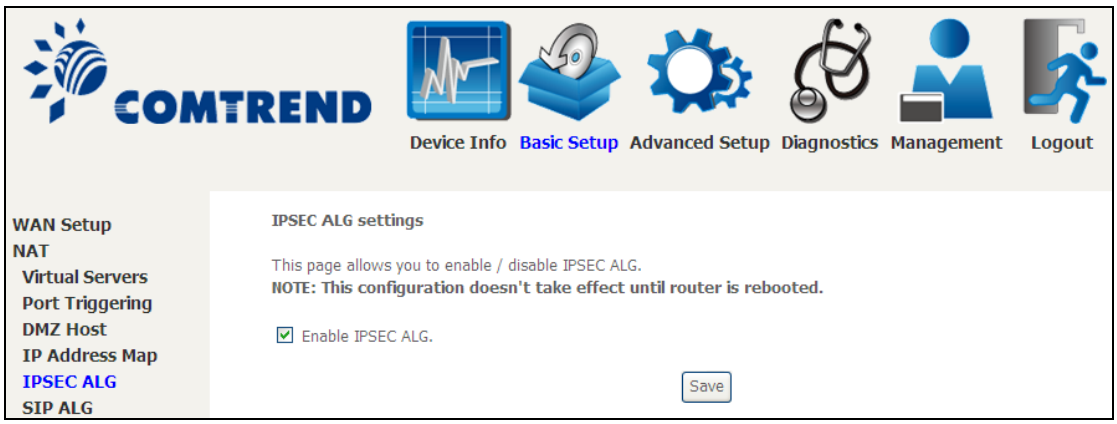

To enable IPSEC ALG, tick the checkbox and click the **Save** button.

5.2.6 SIP ALG

This page allows you to enable / disable SIP ALG.

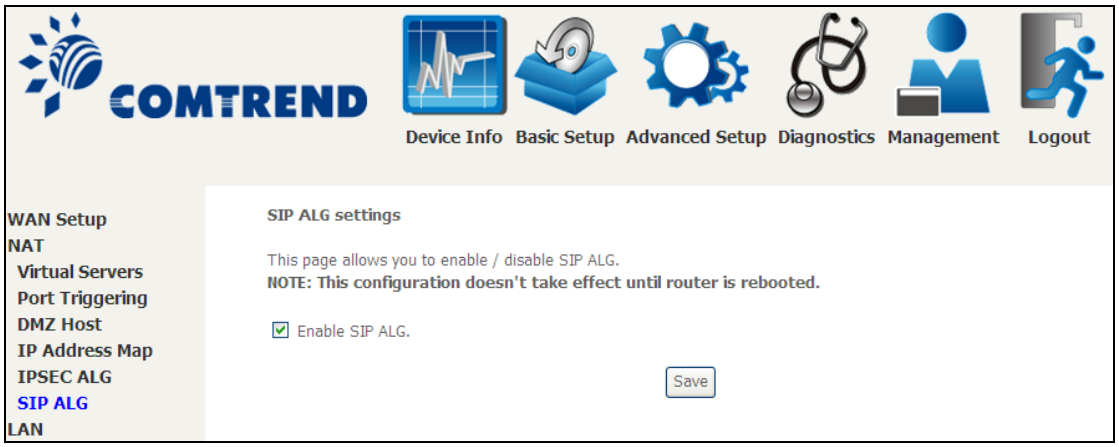

5.3 LAN

Configure the LAN interface settings and then click **Apply / Save**.

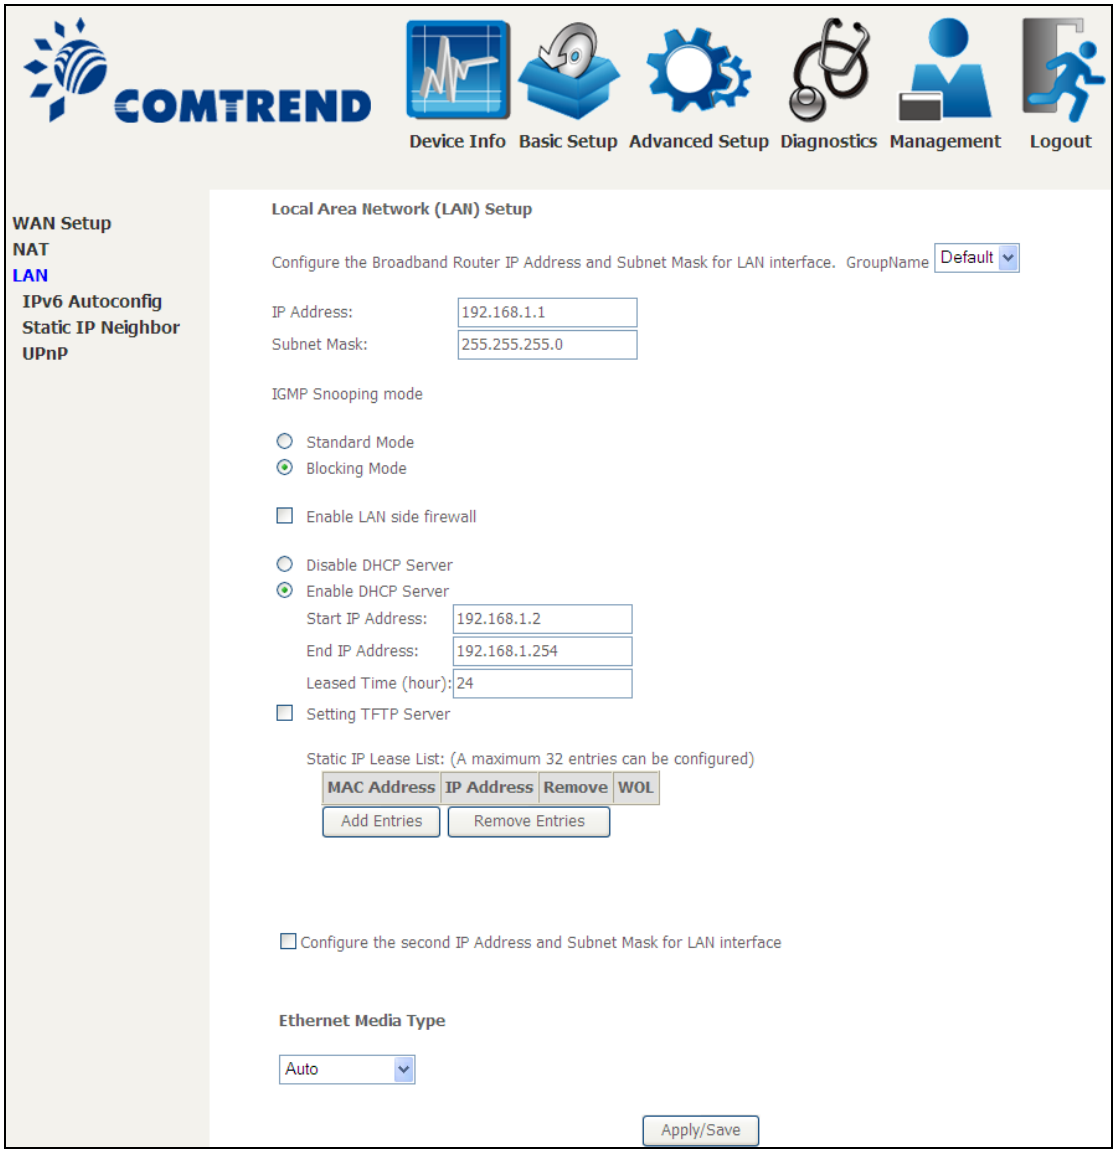

Consult the field descriptions below for more details.

GroupName: Select an Interface Group.

1st LAN INTERFACE

IP Address: Enter the IP address for the LAN port.

Subnet Mask: Enter the subnet mask for the LAN port.

IGMP Snooping:

Standard Mode: In standard mode, multicast traffic will flood to all bridge ports when no client subscribes to a multicast group – even if IGMP snooping is enabled.

Blocking Mode: In blocking mode, the multicast data traffic will be blocked and not flood to all bridge ports when there are no client subscriptions to any multicast group.

Enable LAN side firewall: Enable by ticking the checkbox ☑.

DHCP Server: To enable DHCP, select **Enable DHCP server** and enter Start and End IP addresses and the Leased Time. This setting configures the router to automatically assign IP, default gateway and DNS server addresses to every PC on your LAN.

Setting TFTP Server: Enable by ticking the checkbox ☑. Then, input the TFTP server address or an IP address.

Static IP Lease List: A maximum of 32 entries can be configured.

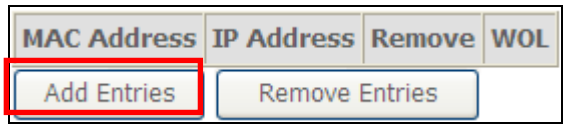

To add an entry, enter MAC address and static IP address and then click **Apply / Save**.

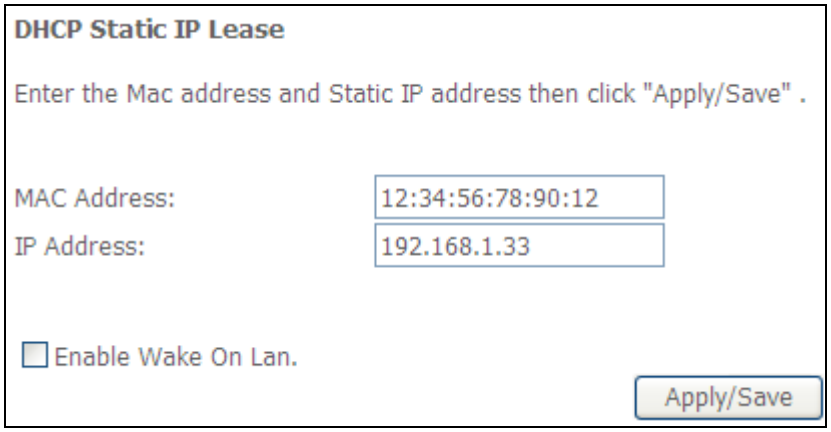

To remove an entry, tick the corresponding checkbox ☑ in the Remove column and then click the **Remove Entries** button, as shown below.

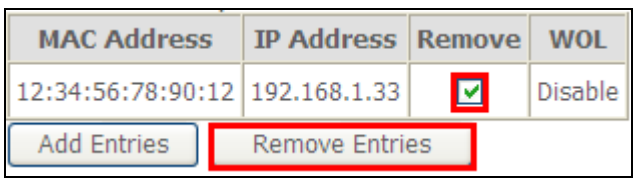

2ND LAN INTERFACE

To configure a secondary IP address, tick the checkbox ☑ outlined (in RED) below.

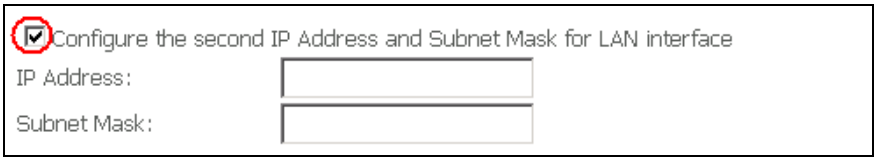

IP Address: Enter the secondary IP address for the LAN port.
Subnet Mask: Enter the secondary subnet mask for the LAN port.
Ethernet Media Type:

Configure auto negotiation, or enforce selected speed and duplex mode for the Ethernet port.



5.3.1 LAN IPv6 Autoconfig

Configure the LAN interface settings and then click **Save / Apply**.

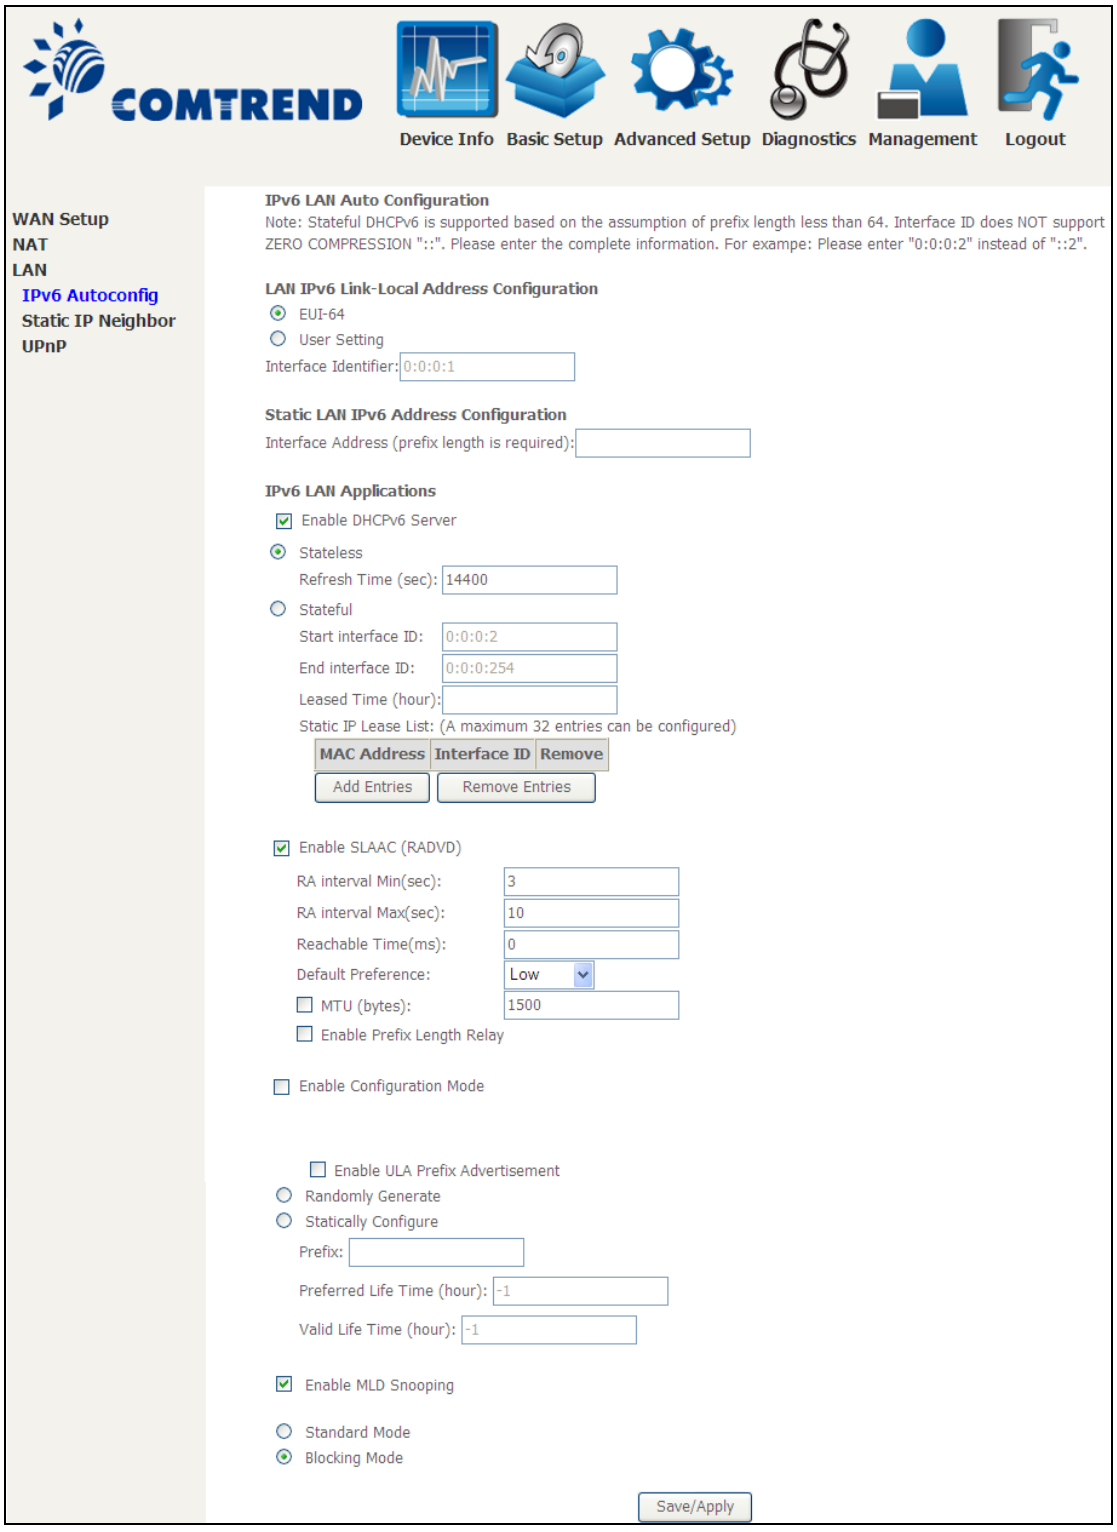

Consult the field descriptions below for more details.

LAN IPv6 Link-Local Address Configuration

Heading	Description
EUI-64	Use EUI-64 algorithm to calculate link-local address from MAC address
User Setting	Use the Interface Identifier field to define a link-local address

Static LAN IPv6 Address Configuration

Heading	Description
Interface Address (prefix length is required):	Configure static LAN IPv6 address and subnet prefix length

IPv6 LAN Applications

Heading	Description
Stateless	Use stateless configuration
Refresh Time (sec):	The information refresh time option specifies how long a client should wait before refreshing information retrieved from DHCPv6
Stateful	Use stateful configuration
Start interface ID:	Start of interface ID to be assigned to dhcpv6 client
End interface ID:	End of interface ID to be assigned to dhcpv6 client
Leased Time (hour):	Lease time for dhcpv6 client to use the assigned IP address

Static IP Lease List: A maximum of 32 entries can be configured.

To add an entry, enter MAC address and Interface ID and then click **Apply/Save**.

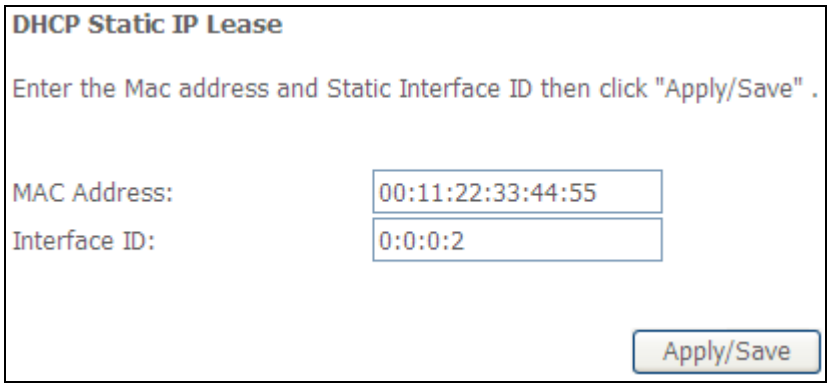

To remove an entry, tick the corresponding checkbox ☑ in the Remove column and then click the **Remove Entries** button, as shown below.

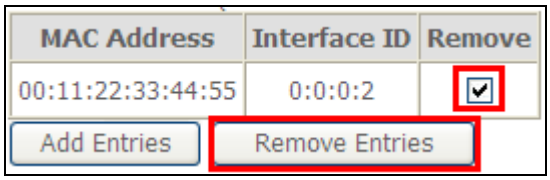

Heading	Description
Enable RADVD	Enable use of router advertisement daemon
RA interval Min(sec):	Minimum time to send router advertisement
RA interval Max(sec):	Maximum time to send router advertisement
Reachable Time(ms):	The time, in milliseconds that a neighbor is reachable after receiving reachability confirmation
Default Preference:	Preference level associated with the default router
MTU (bytes):	MTU value used in router advertisement messages to insure that all nodes on a link use the same MTU value
Enable Prefix Length Relay	Use prefix length receive from WAN interface
Enable Configuration Mode	Manually configure prefix, prefix length, preferred lifetime and valid lifetime used in router advertisement
Enable ULA Prefix Advertisement	Allow RADVD to advertise Unique Local Address Prefix
Randomly Generate	Use a Randomly Generated Prefix
Statically Configure Prefix	Specify the prefix to be used
Statically Configure	The prefix to be used
Preferred Life Time (hour)	The preferred life time for this prefix
Valid Life Time (hour)	The valid life time for this prefix
Enable MLD Snooping	Enable/disable IPv6 multicast forward to LAN ports

5.3.2 Static IP Neighbor

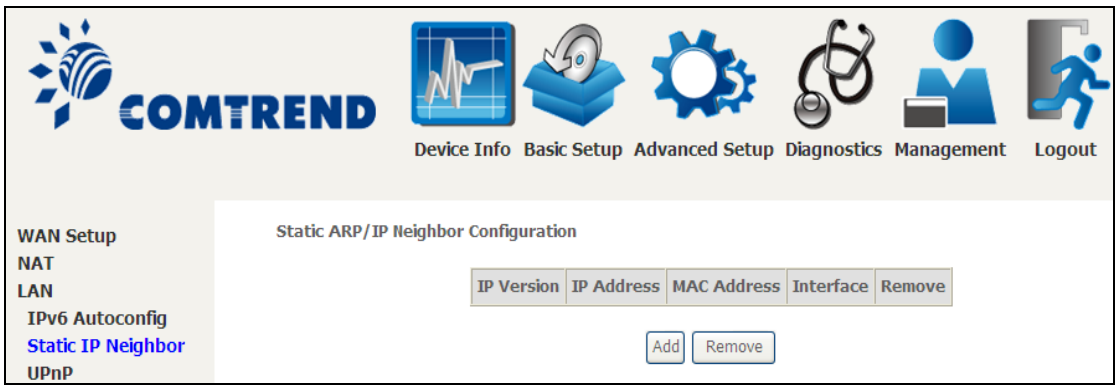

Click the Add button to display the following.

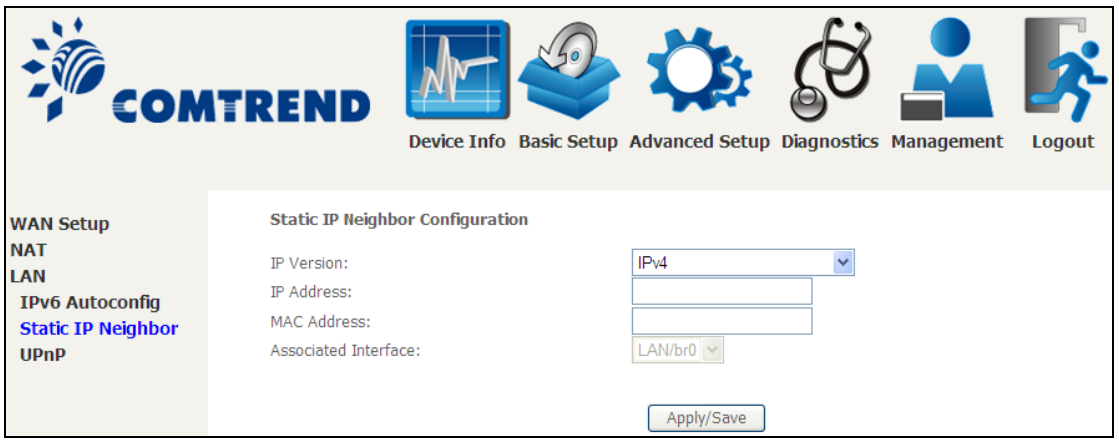

Click **Apply/Save** to apply and save the settings.

Heading	Description
IP Version	The IP version used for the neighbor device
IP Address	Define the IP Address for the neighbor device
MAC Address	The MAC Address of the neighbor device
Associated Interface	The interface where the neighbor device is located

5.3.3 UPnP

Select the checkbox ☑ provided and click **Apply / Save** to enable UPnP protocol.

Chapter 6 Advanced Setup

You can reach this page by clicking on the following icon located at the top of the screen.

6.1 Auto-detection setup

The auto-detection function is used for CPE to detect WAN service for either ETHWAN or xDSL interface. The feature is designed for the scenario that requires only **one WAN service** in different applications.

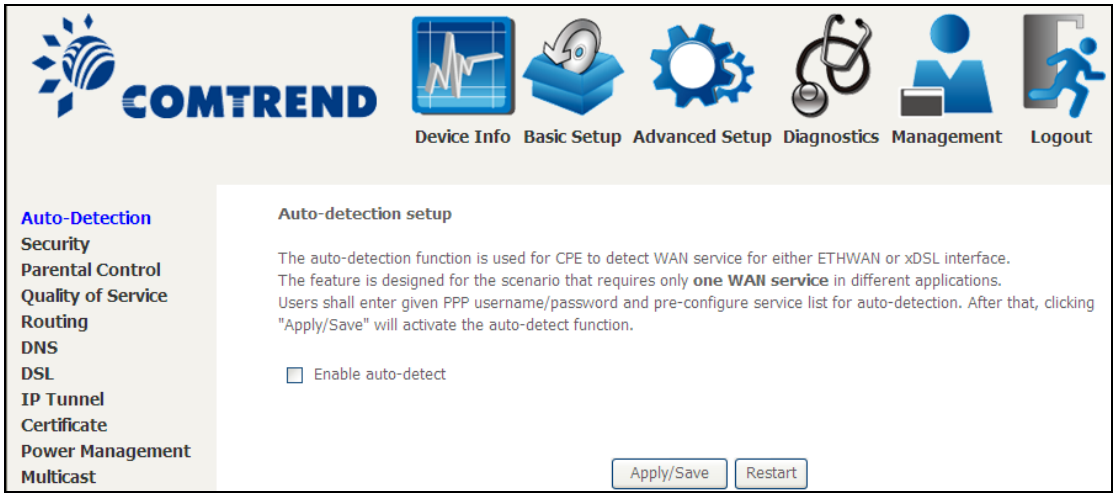

The Auto Detection page simply provides a checkbox allowing users to enable or disable the feature. Check the checkbox to display the following configuration options.

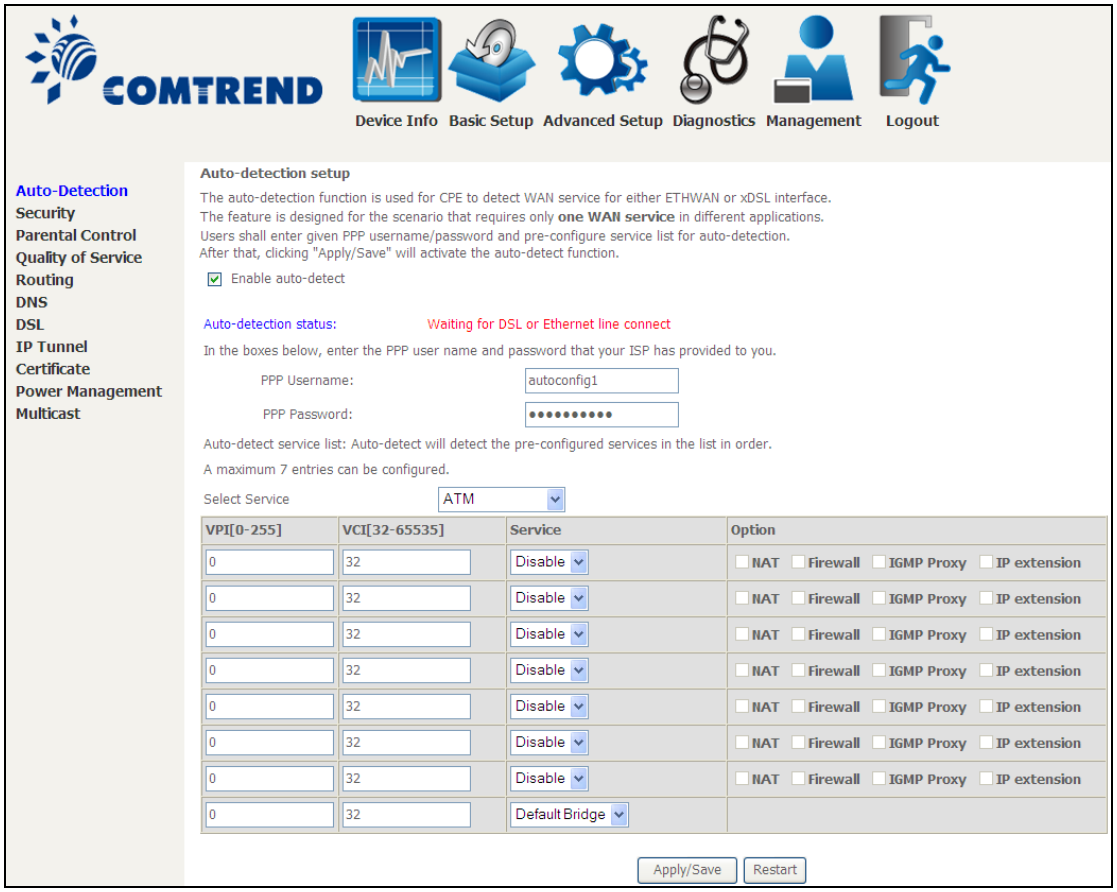

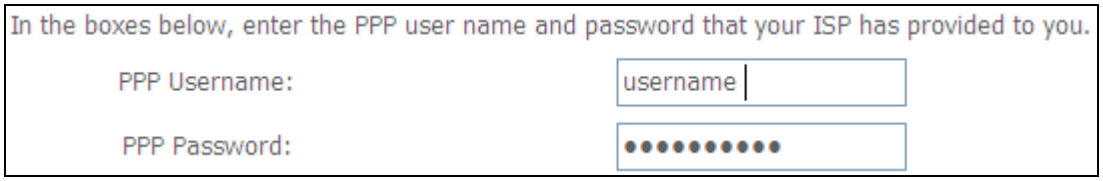

Enter the PPP username/password given by your service provider for PPP service detection.

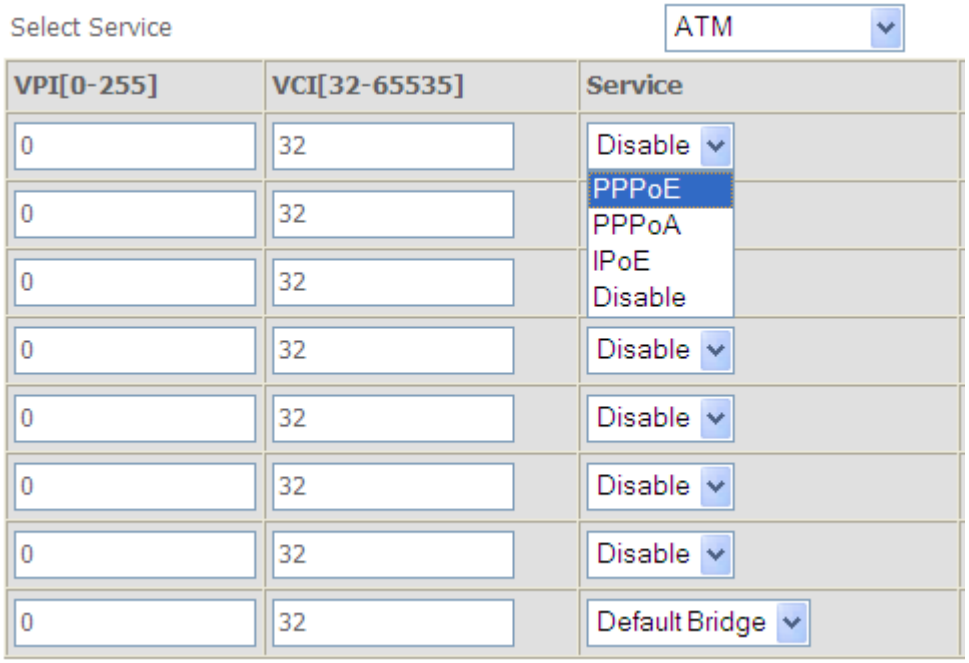

WAN services list for ATM mode: A maximum of 7 WAN services with corresponding PVC are required to be configured for ADSL ATM mode. The services will be detected in order. Users can modify the 7 pre-configured services and select **disable** to ignore any of those services to meet their own requirement and also reduce the detection cycle.

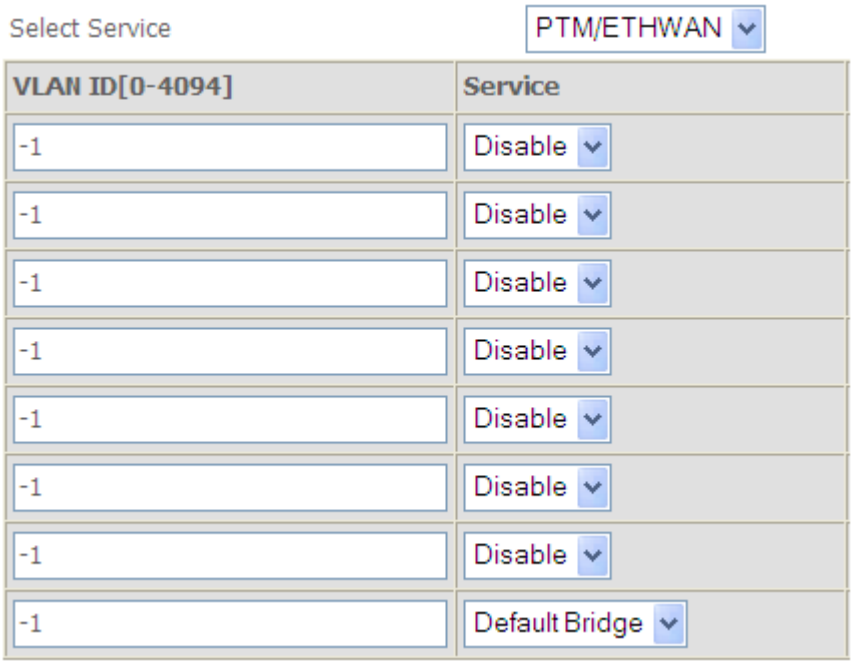

WAN services list for PTM mode: A maximum of 7 WAN services with corresponding VLAN ID (-1 indicates no VLAN ID is required for the service) are required to be configured for ADSL/VDSL PTM mode and ETHWAN. The services will be detected in order. Users can modify the 7 pre-configured services and select **disable** to ignore any of the services to meet their own requirement and also reduce the detection cycle.

Click "Apply/Save" to activate the auto-detect function.

Options for each WAN service: These options are selectable for each WAN service. Users can pre-configure both WAN services and other provided settings to meet their deployed requirements.

Auto Detection status and Restart

The Auto-detection status is used to display the real time status of the Auto-detection feature.



The **Restart** button is used to detect all the WAN services that are either detected by the auto-detection feature or configured manually by users.



The following window will pop up upon clicking the **Restart** button. Click the **OK** button to proceed.

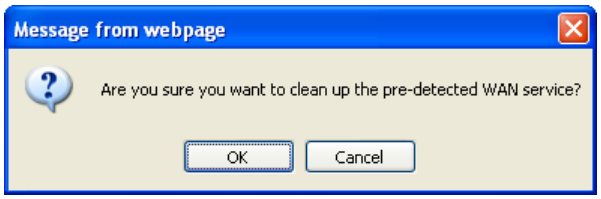

Auto Detection notice

Note: The following description concerning ETHWAN is for multiple LAN port devices only.

1) This feature will automatically detect one WAN service only. If customers require multiple WAN services, manual configuration is required.

2) If a physical ETHWAN port is detected, the Auto Detection for ETHWAN will be fixed on the physical ETHWAN port and cannot be configured for any LAN port; if the physical ETHWAN port is not detected, the Auto Detection for ETHWAN will be configured to the 4th LAN port by default and allows it to be configured for any LAN port as well.
3) For cases in which both the DSL port and ETHWAN port are plugged in at the same time, the DSL WAN will have priority over ETHWAN. For example, the ETHWAN port is plugged in with a WAN service detected automatically and then the DSL port is plugged in and linked up. The Auto Detection feature will clear the WAN service for ETHWAN and re-detect the WAN service for DSL port.
4) If none of the pre-configured services are detected, a Bridge service will be created.

6.2 Security

To display this function, you must enable the firewall feature in WAN Setup.
For detailed descriptions, with examples, please consult Appendix A - Firewall.

6.2.1 IP Filtering

This screen sets filter rules that limit IP traffic (Outgoing/Incoming). Multiple filter rules can be set and each applies at least one limiting condition. For individual IP packets to pass the filter all conditions must be fulfilled.

NOTE:	This function is not available when in bridge mode. Instead, MAC Filtering performs a similar function.

OUTGOING IP FILTER

By default, all outgoing IP traffic is allowed, but IP traffic can be blocked with filters.

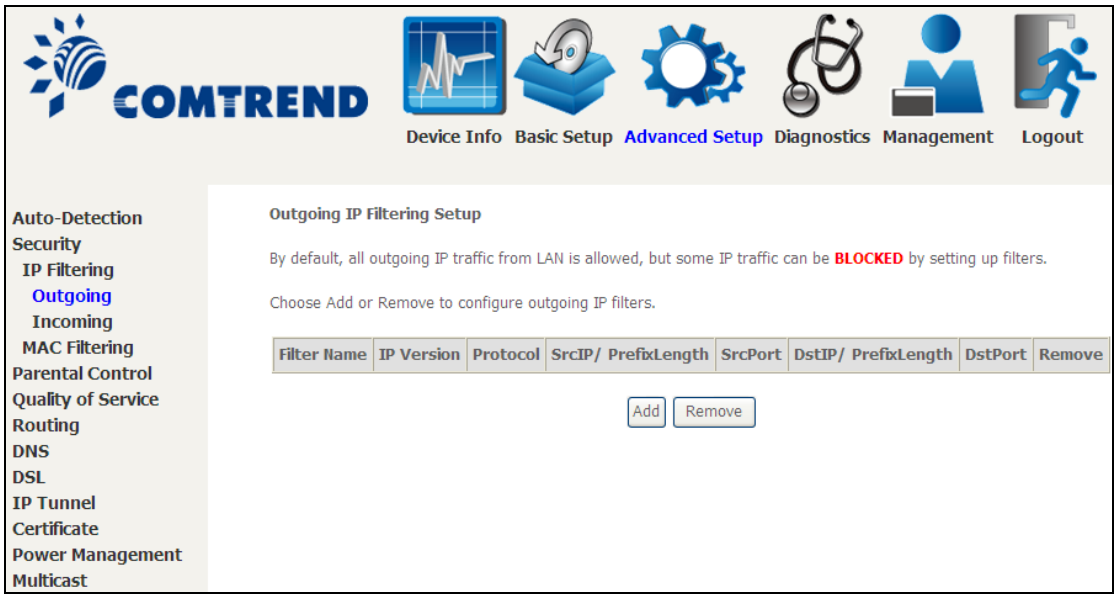

To add a filter (to block some outgoing IP traffic), click the **Add** button.

On the following screen, enter your filter criteria and then click **Apply/Save**.

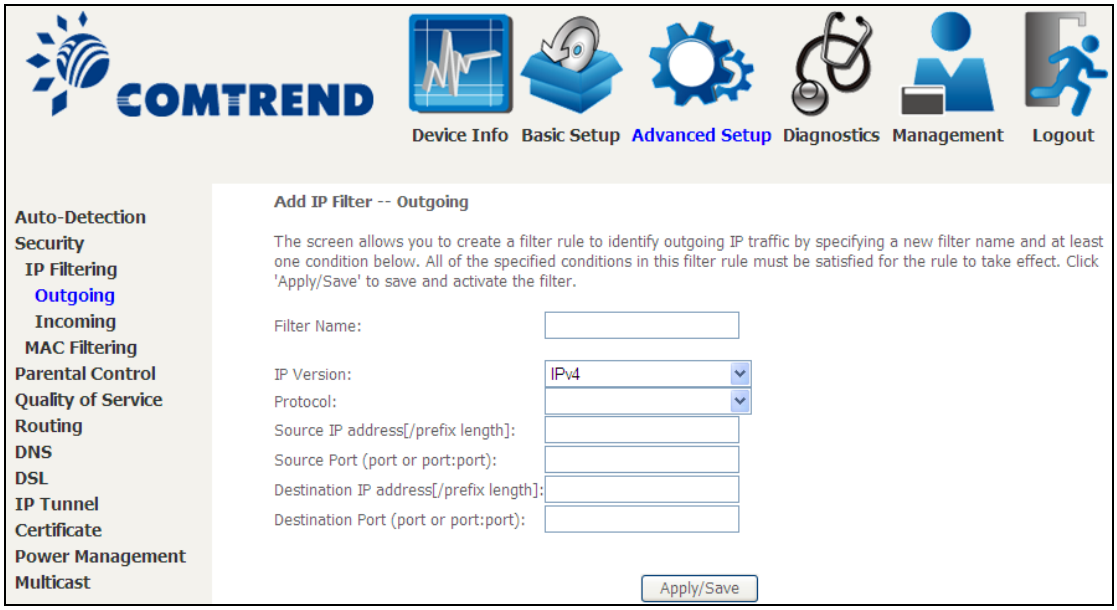

Consult the table below for field descriptions.

Field	Description
Filter Name	The filter rule label
IP Version	Select from the drop down menu.
Protocol	TCP, TCP/UDP, UDP, or ICMP.
Source IP address	Enter source IP address.
Source Port (port or port:port)	Enter source port number or range.
Destination IP address	Enter destination IP address.
Destination Port (port or port:port)	Enter destination port number or range.

INCOMING IP FILTER

By default, all incoming IP traffic is blocked, but IP traffic can be allowed with filters.

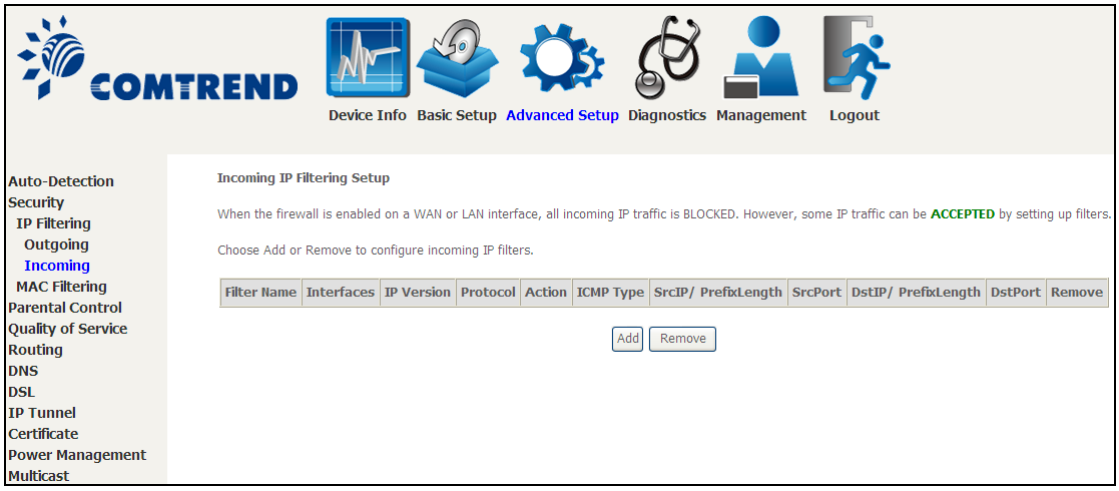

To add a filter (to allow incoming IP traffic), click the **Add** button.
On the following screen, enter your filter criteria and then click **Apply/Save**.

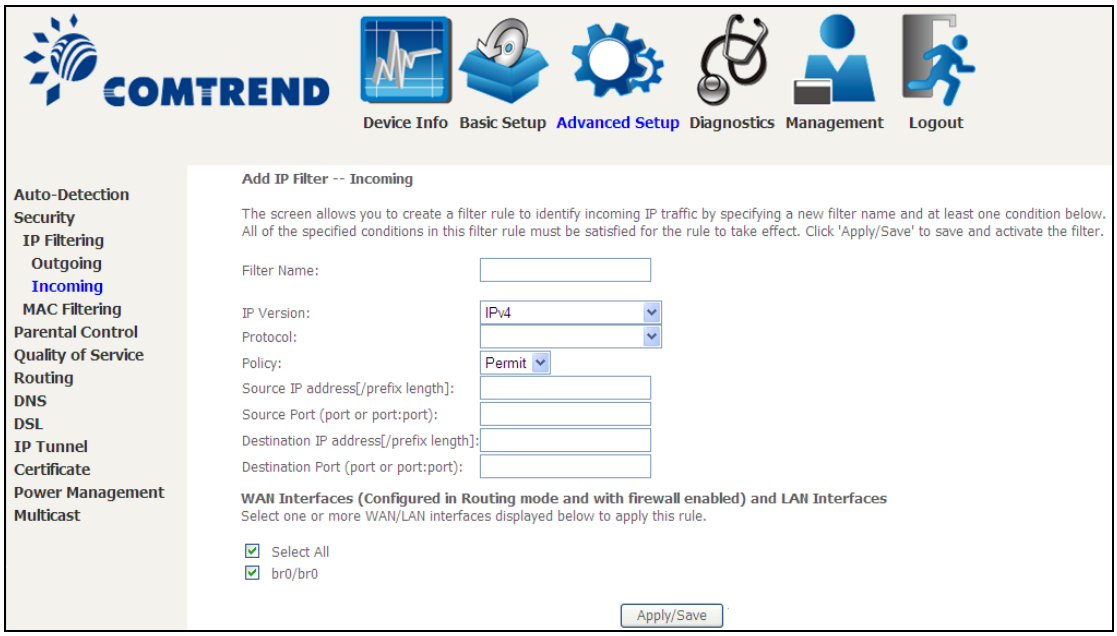

Consult the table below for field descriptions.

Field	Description
Filter Name	The filter rule label.
IP Version	Select from the drop down menu.
Protocol	TCP, TCP/UDP, UDP, or ICMP.
Policy	Permit/Drop packets specified by the firewall rule.
Source IP address	Enter source IP address.
Source Port (port or port:port)	Enter source port number or range.
Destination IP address	Enter destination IP address.
Destination Port (port or port:port)	Enter destination port number or range.

At the bottom of this screen, select the WAN and LAN Interfaces to which the filter rule will apply. You may select all or just a subset. WAN interfaces in bridge mode or without firewall enabled are not available.

6.2.2 MAC Filtering

NOTE:	This option is only available in bridge mode. Other modes use IP Filtering to perform a similar function.

Each network device has a unique 48-bit MAC address. This can be used to filter (block or forward) packets based on the originating device. MAC filtering policy and rules for the VR-3030 can be set according to the following procedure.

The MAC Filtering Global Policy is defined as follows. **FORWARDED** means that all MAC layer frames will be **FORWARDED** except those matching the MAC filter rules. **BLOCKED** means that all MAC layer frames will be **BLOCKED** except those matching the MAC filter rules. The default MAC Filtering Global policy is **FORWARDED**. It can be changed by clicking the **Change Policy** button.

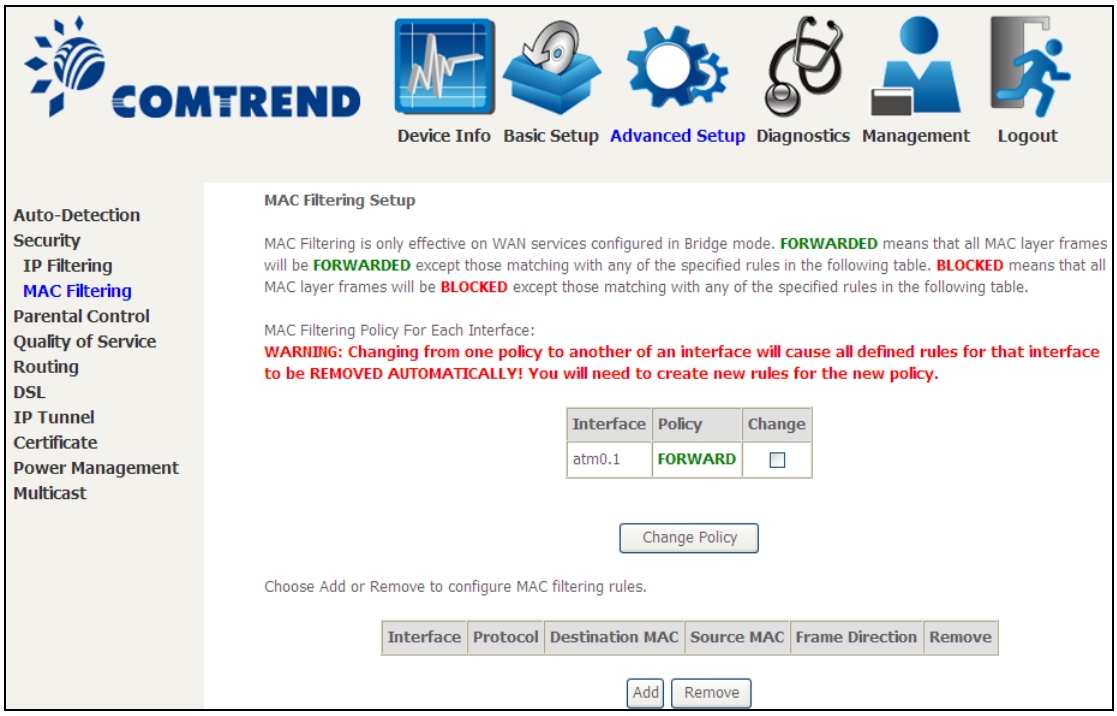

Choose **Add** or **Remove** to configure MAC filtering rules. The following screen will appear when you click **Add**. Create a filter to identify the MAC layer frames by specifying at least one condition below. If multiple conditions are specified, all of them must be met. Click **Save / Apply** to save and activate the filter rule.

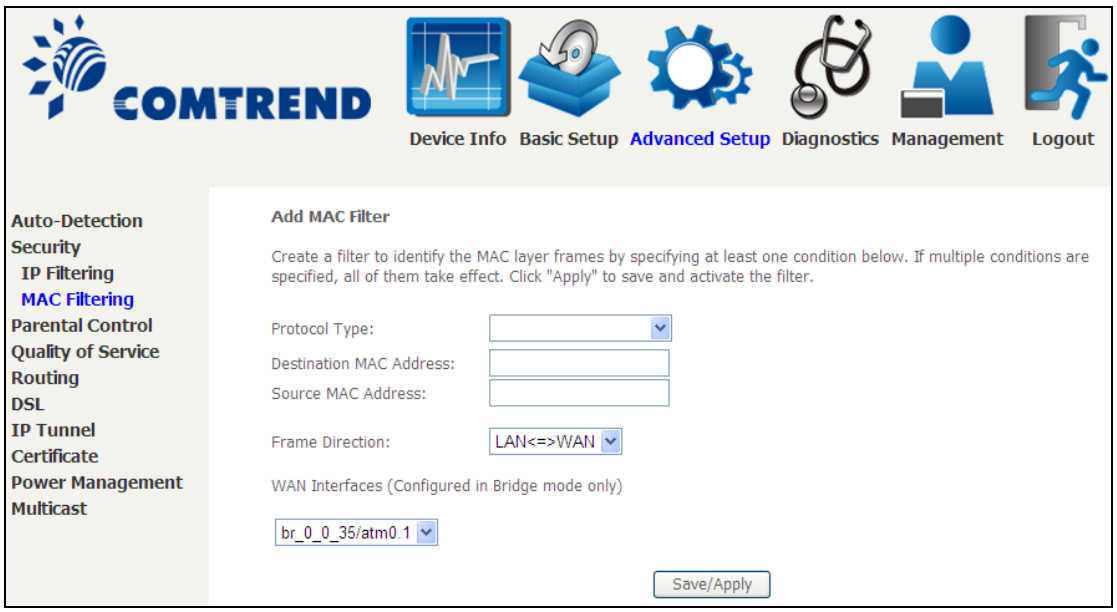

Consult the table below for detailed field descriptions.

Field	Description
Protocol Type	PPPoE, IPv4, IPv6, AppleTalk, IPX, NetBEUI, IGMP
Destination MAC Address	Defines the destination MAC address
Source MAC Address	Defines the source MAC address
Frame Direction	Select the incoming/outgoing packet interface
WAN Interfaces	Applies the filter to the selected bridge interface.

6.3 Parental Control

This selection provides WAN access control functionality.

6.3.1 Time Restriction

This feature restricts access from a LAN device to an outside network through the device on selected days at certain times. Make sure to activate the Internet Time server synchronization as described in section 8.5 Internet Time, so that the scheduled times match your local time.

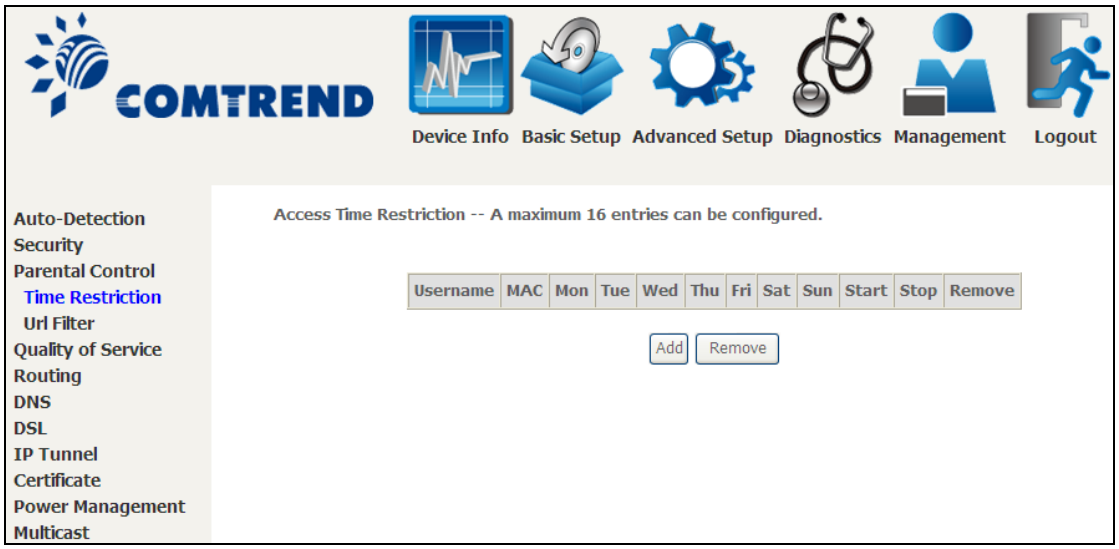

Click **Add** to display the following screen.

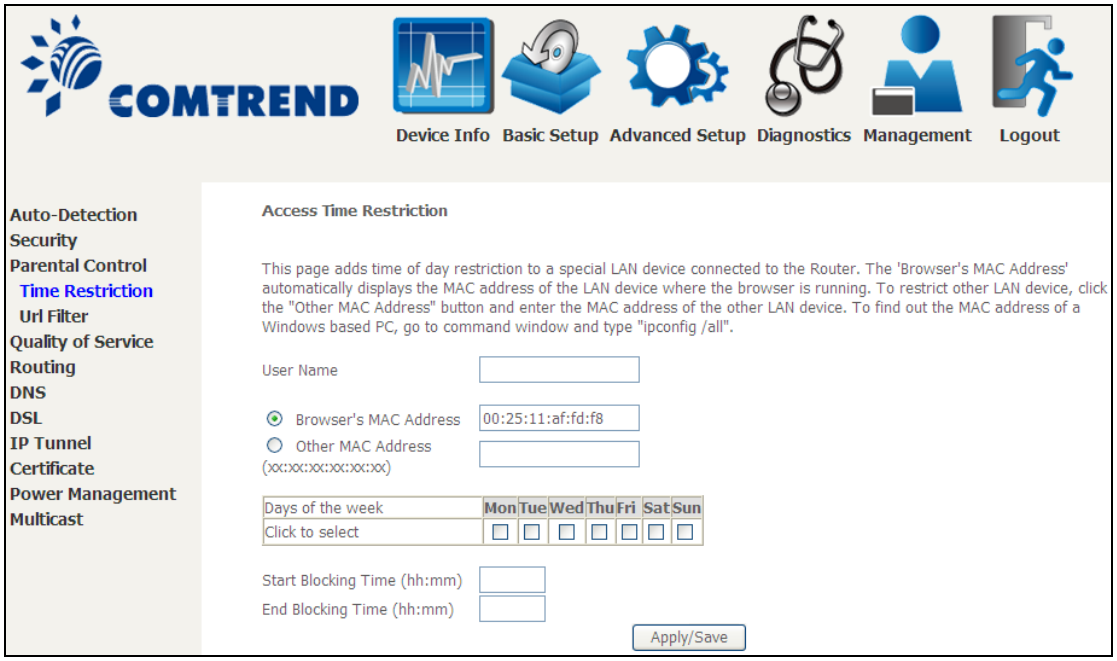

See below for field descriptions. Click **Apply / Save** to add a time restriction.

User Name: A user-defined label for this restriction.
Browser's MAC Address: MAC address of the PC running the browser.
Other MAC Address: MAC address of another LAN device.
Days of the Week: The days the restrictions apply.
Start Blocking Time: The time the restrictions start.
End Blocking Time: The time the restrictions end.

6.3.2 URL Filter

This screen allows for the creation of a filter rule for access rights to websites based on their URL address and port number.

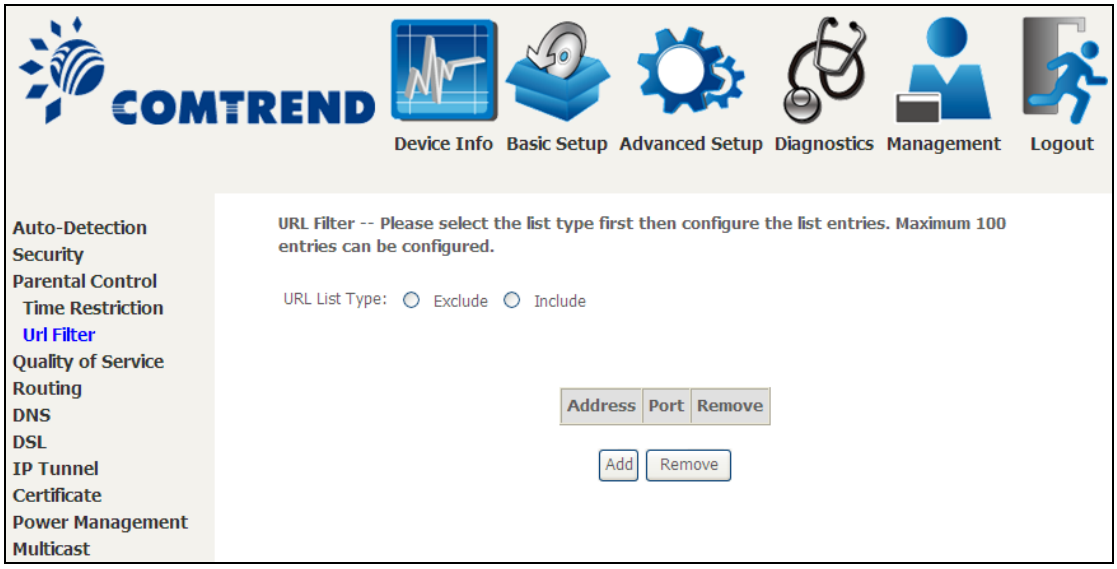

Select URL List Type: Exclude or Include.

Tick the **Exclude** radio button to deny access to the websites listed.

Tick the **Include** radio button to restrict access to only those listed websites.

Then click **Add** to display the following screen.

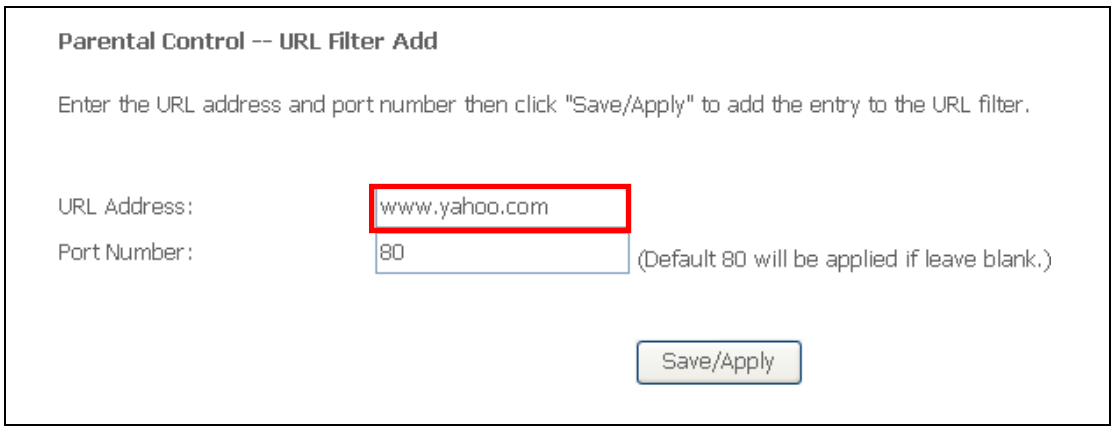

Enter the URL address and port number then click **Save/Apply** to add the entry to the URL filter. URL Addresses begin with "www", as shown in this example.

A maximum of 100 entries can be added to the URL Filter list.

6.4 Quality of Service (QoS)

NOTE: QoS must be enabled in at least one PVC to display this option.
(see Appendix E - Connection Setup for detailed PVC setup instructions).

To Enable QoS tick the checkbox ☑ and select a Default DSCP Mark.

Click Apply/Save to activate QoS.

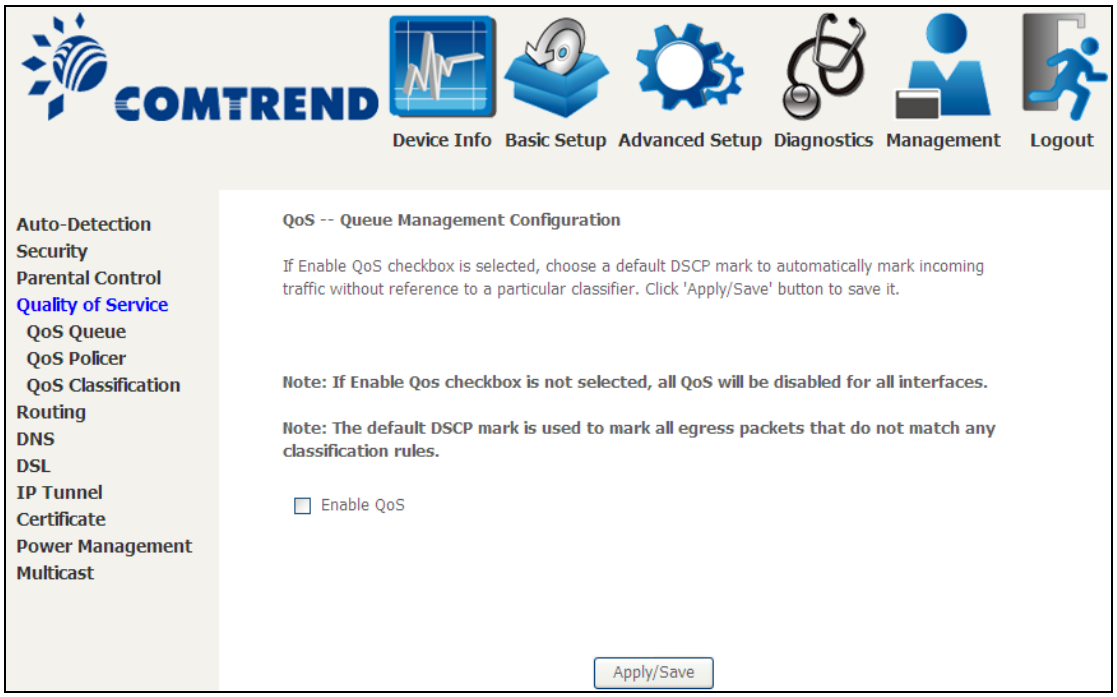

QoS and DSCP Mark are defined as follows:
Quality of Service (QoS): This provides different priority to different users or data flows, or guarantees a certain level of performance to a data flow in accordance with requests from Queue Prioritization.

Default Differentiated Services Code Point (DSCP) Mark: This specifies the per hop behavior for a given flow of packets in the Internet Protocol (IP) header that do not match any other QoS rule.

6.4.1 QoS Queue Setup

Configure queues with different priorities to be used for QoS setup.

In ATM mode, maximum 16 queues can be configured.
In PTM mode, maximum 8 queues can be configured.
For each Ethernet interface, maximum 3 queues can be configured.

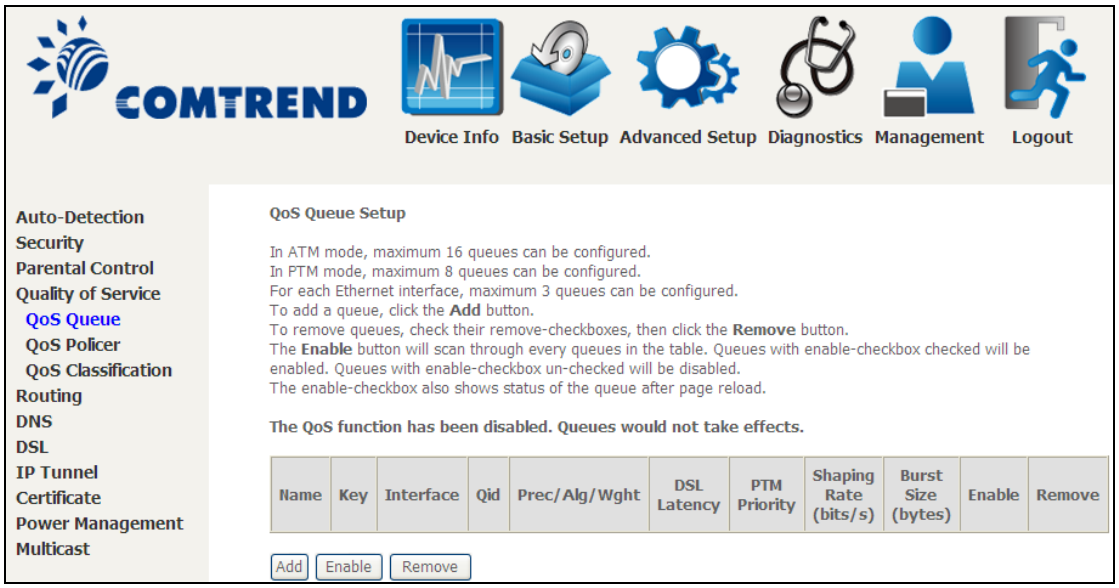

To add a queue, click the **Add** button.

To remove queues, check their remove-checkboxes, then click the **Remove** button. The **Enable** button will scan through every queues in the table. Queues with enable-checkbox checked will be enabled. Queues with enable-checkbox un-checked will be disabled.

The enable-checkbox also shows status of the queue after page reload.

Note that if WMM function is disabled in Wireless Page, queues related to wireless will not take effect. This function follows the Differentiated Services rule of IP QoS.
You can create a new Queue entry by clicking the **Add** button.
Enable and assign an interface and precedence on the next screen. Click **Save/Reboot** on this screen to activate it.

Click **Add** to display the following screen.

Click **Apply/Save** to apply and save the settings.

Name: Identifier for this Queue entry.

Enable: Enable/Disable the Queue entry.

Interface: Assign the entry to a specific network interface (QoS enabled).

6.4.2 QoS Policer

To remove policers, check their remove-checkboxes, then click the **Remove** button.

The **Enable** button will scan through every policers in the table. Policers with enable-checkbox checked will be enabled. Policers with enable-checkbox un-checked will be disabled.

The enable-checkbox also shows status of the policer after page reload.

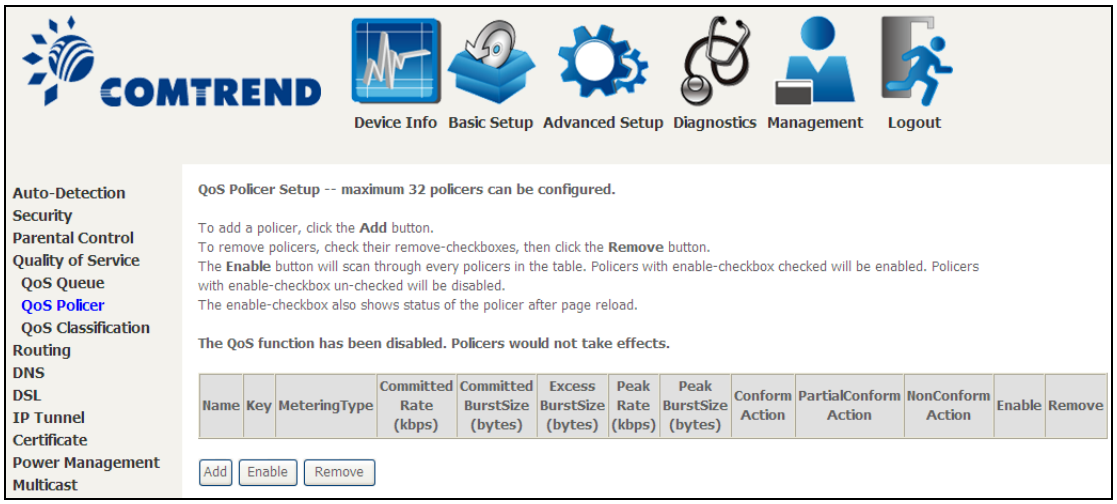

To add a policer, click the **Add** button.

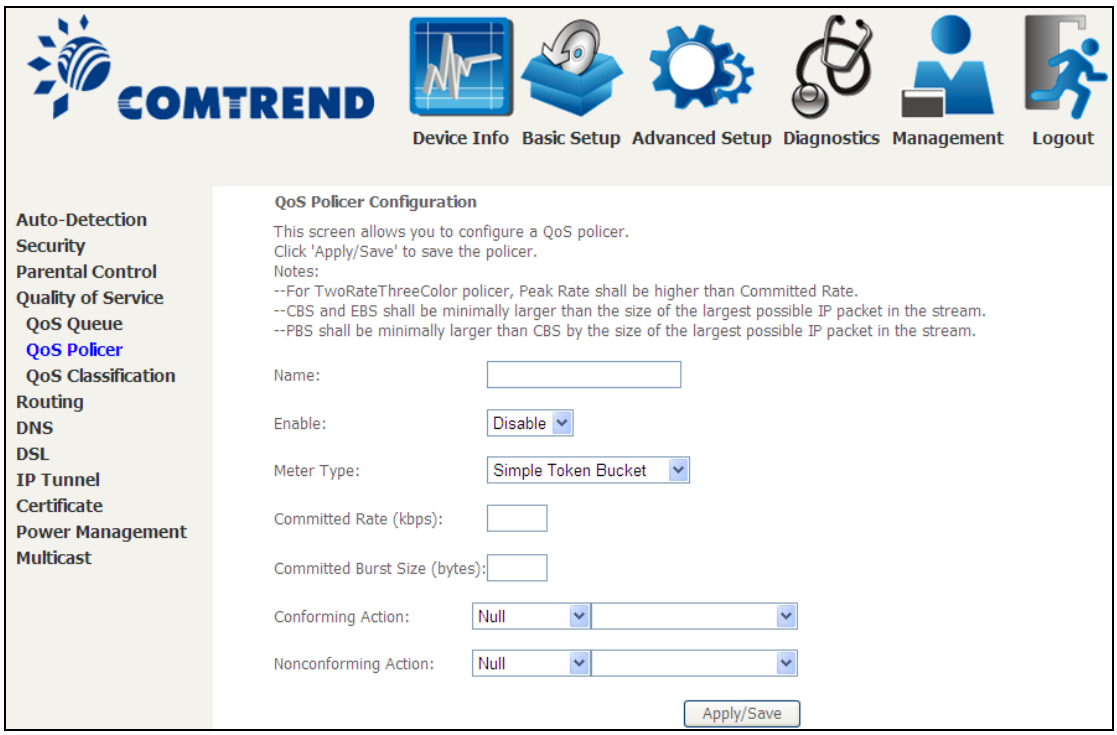

Click **Apply/Save** to save the policer.

Field	Description
Name	Name of this policer rule
Enable	Enable/Disable this policer rule
Meter Type	Meter type used for this policer rule
Committed Rate (kbps)	Defines the rate allowed for committed packets
Committed Burst Size (bytes)	Maximum amount of packets that can be processed by this policer
Conforming Action	Defines action to be taken if packets match this policer
Nonconforming Action	Defines actions to be taken if packets do not match this policer

6.4.3 QoS Classification

The network traffic classes are listed in the following table.

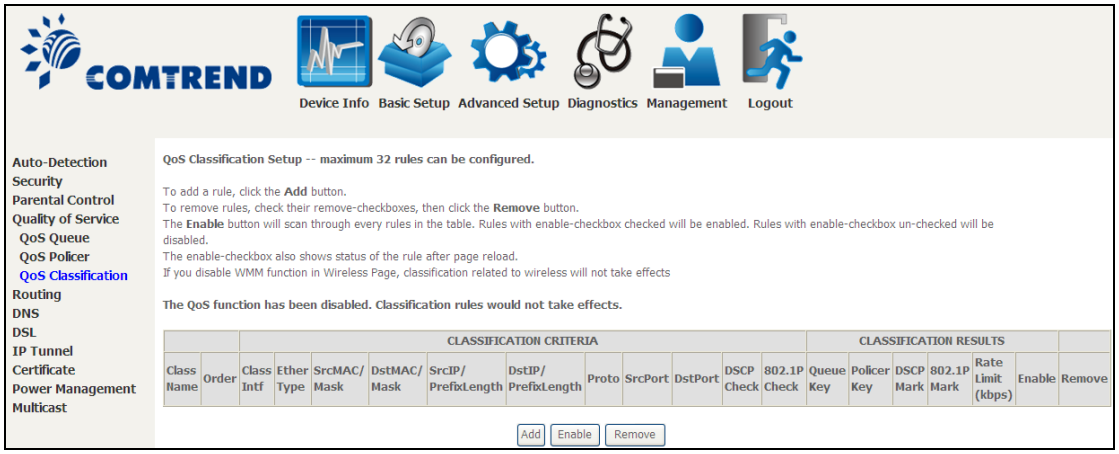

Click **Add** to configure a network traffic class rule and **Enable** to activate it. To delete an entry from the list, click **Remove**.

This screen creates a traffic class rule to classify the upstream traffic, assign queuing priority and optionally overwrite the IP header DSCP byte. A rule consists of a class name and at least one logical condition. All the conditions specified in the rule must be satisfied for it to take effect.

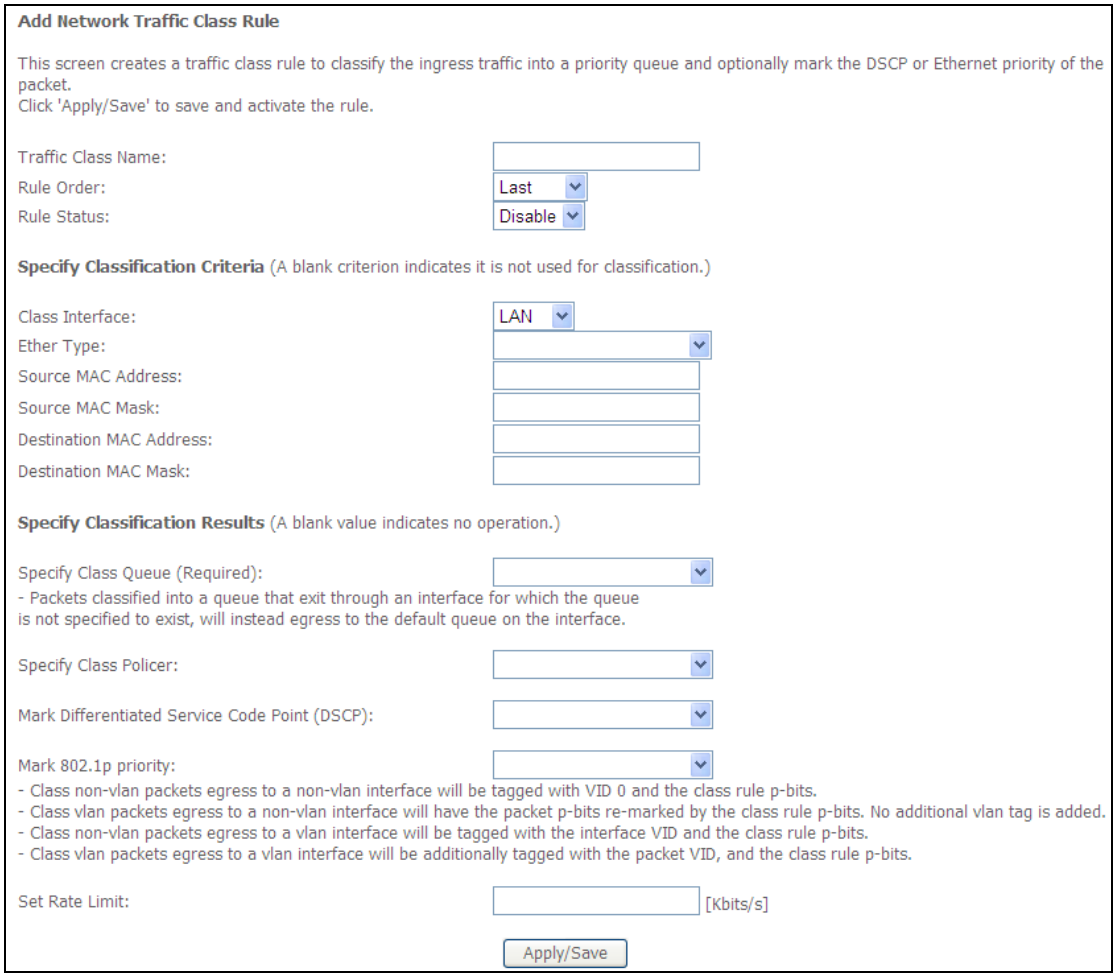

Click **Apply/Save** to save and activate the rule.

Field	Description
Traffic Class Name	Enter a name for the traffic class.
Rule Order	Last is the only option.
Rule Status	Disable or enable the rule.
Classification Criteria	
Class Interface	Select an interface (i.e. Local, eth0-4, wl0)
Ether Type	Set the Ethernet type (e.g. IP, ARP, IPv6).
Source MAC Address	A packet belongs to SET-1, if a binary-AND of its source MAC address with the Source MAC Mask is equal to the binary-AND of the Source MAC Mask and this field.
Source MAC Mask	This is the mask used to decide how many bits are checked in Source MAC Address.
Destination MAC Address	A packet belongs to SET-1 then the result that the Destination MAC Address of its header binary-AND to the Destination MAC Mask must equal to the result that this field binary-AND to the Destination MAC Mask.
Destination MAC Mask	This is the mask used to decide how many bits are checked in Destination MAC Address.

Field	Description
Classification Results	
Specify Class Queue	Packets classified into a queue that exit through an interface for which the queue is not specified to exist, will instead egress to the default queue on the interface.
Specify Class Policer	Packets classified into a policer will be marked based on the conforming action of the policer
Mark Differentiated Service Code Point	The selected Code Point gives the corresponding priority to packets that satisfy the rule.
Mark 802.1p Priority	Select between 0-7. Lower values have higher priority.
Set Rate Limit	The data transmission rate limit in kbps.

6.5 Routing

The following routing functions are accessed from this menu:
Default Gateway, Static Route, Policy Routing, RIP and **IPv6 Static Route**.

NOTE:	In bridge mode, the **RIP** menu option is hidden while the other menu options are shown but ineffective.

6.5.1 Default Gateway

Default gateway interface list can have multiple WAN interfaces served as system default gateways but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

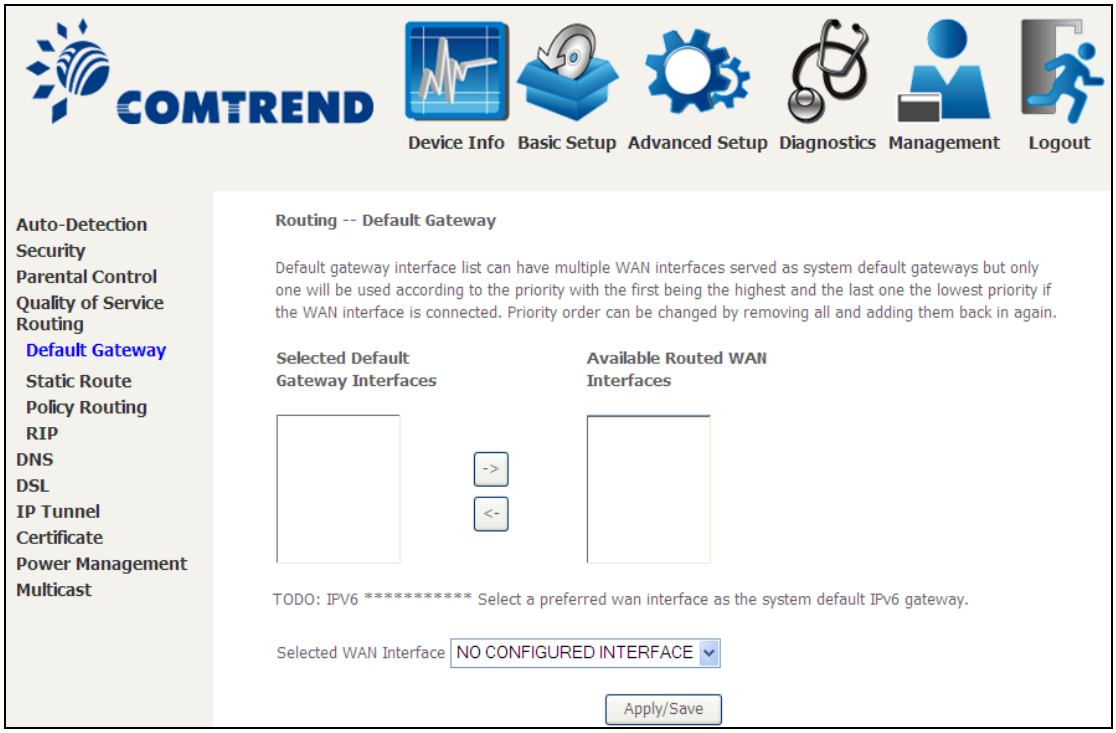

6.5.2 Static Route

This option allows for the configuration of static routes by destination IP.
Click **Add** to create a static route or click **Remove** to delete a static route.

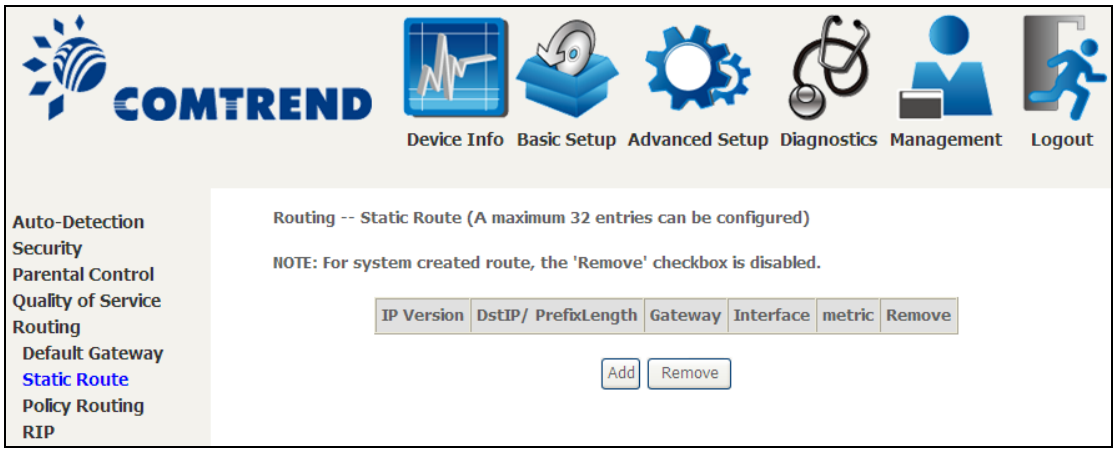

After clicking **Add** the following will display.

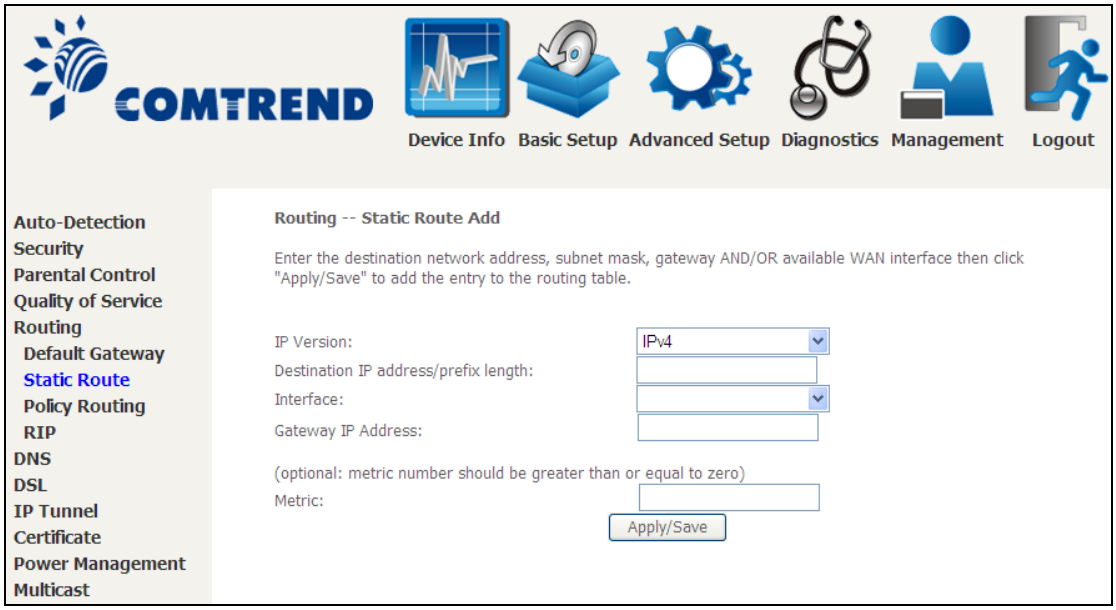

- **IP Version:** Select the IP version to be IPv4.
- **Destination IP address/prefix length:** Enter the destination IP address.
- **Interface:** select the proper interface for the rule.
- **Gateway IP Address:** The next-hop IP address.
- **Metric:** The metric value of routing.

After completing the settings, click **Apply/Save** to add the entry to the routing table.

6.5.3 Policy Routing

This option allows for the configuration of static routes by policy.
Click **Add** to create a routing policy or **Remove** to delete one.

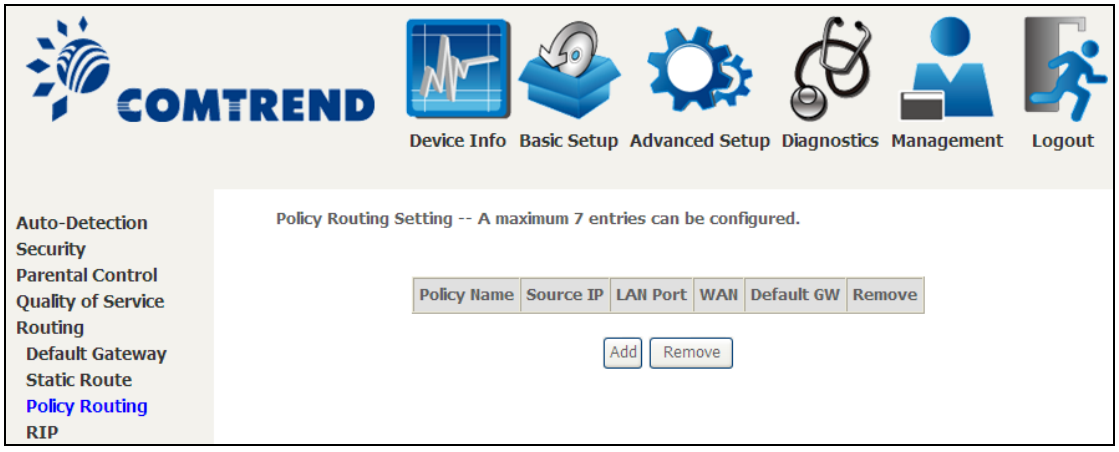

On the following screen, complete the form and click **Apply**/**Save** to create a policy.

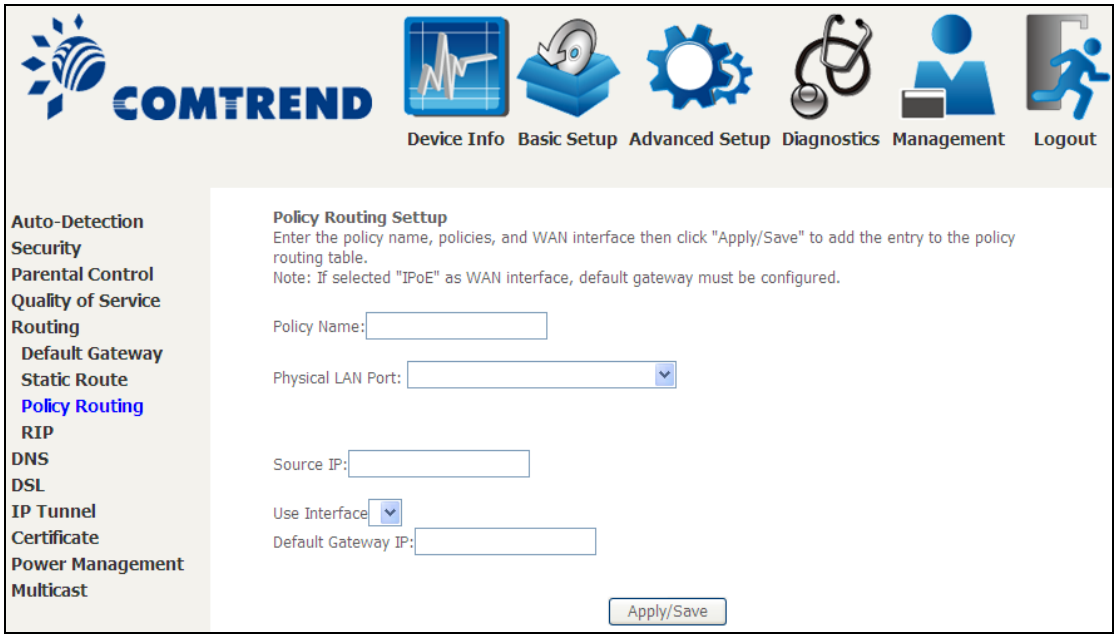

Field	Description
Policy Name	Name of the route policy
Physical LAN Port	Specify the port to use this route policy
Source IP	IP Address to be routed
Use Interface	Interface that traffic will be directed to
Default Gateway IP	IP Address of the default gateway

6.5.4 RIP

To activate RIP, configure the RIP version/operation mode and select the **Enabled** checkbox ☑ for at least one WAN interface before clicking **Save/Apply**.

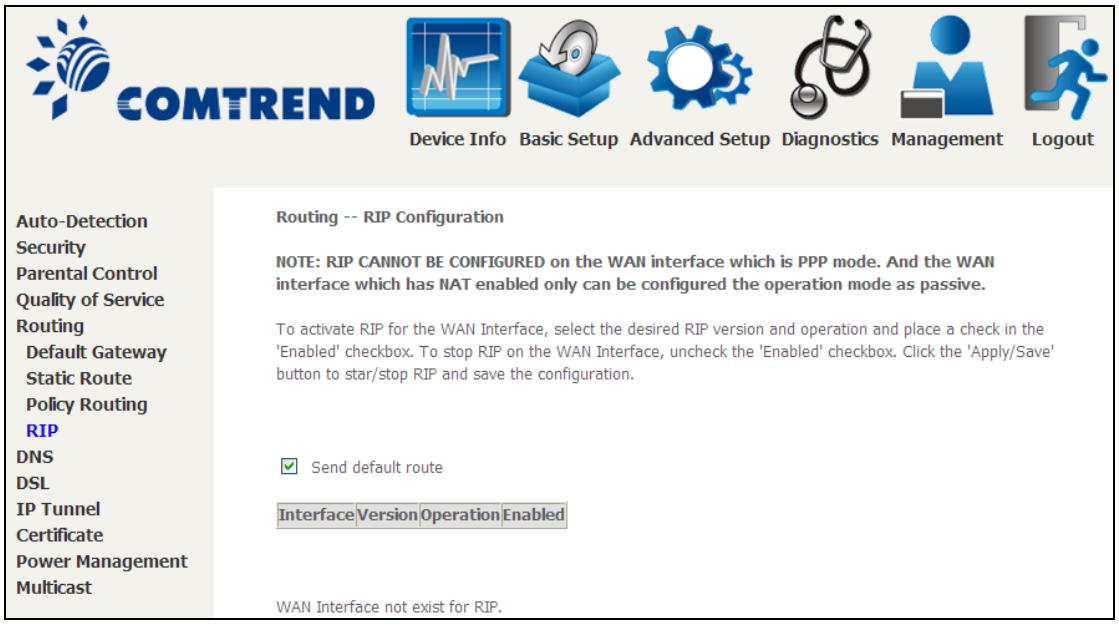

6.6 DNS

6.6.1 DNS Server

Select DNS Server Interface from available WAN interfaces OR enter static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered. **DNS Server Interfaces** can have multiple WAN interfaces served as system dns servers but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

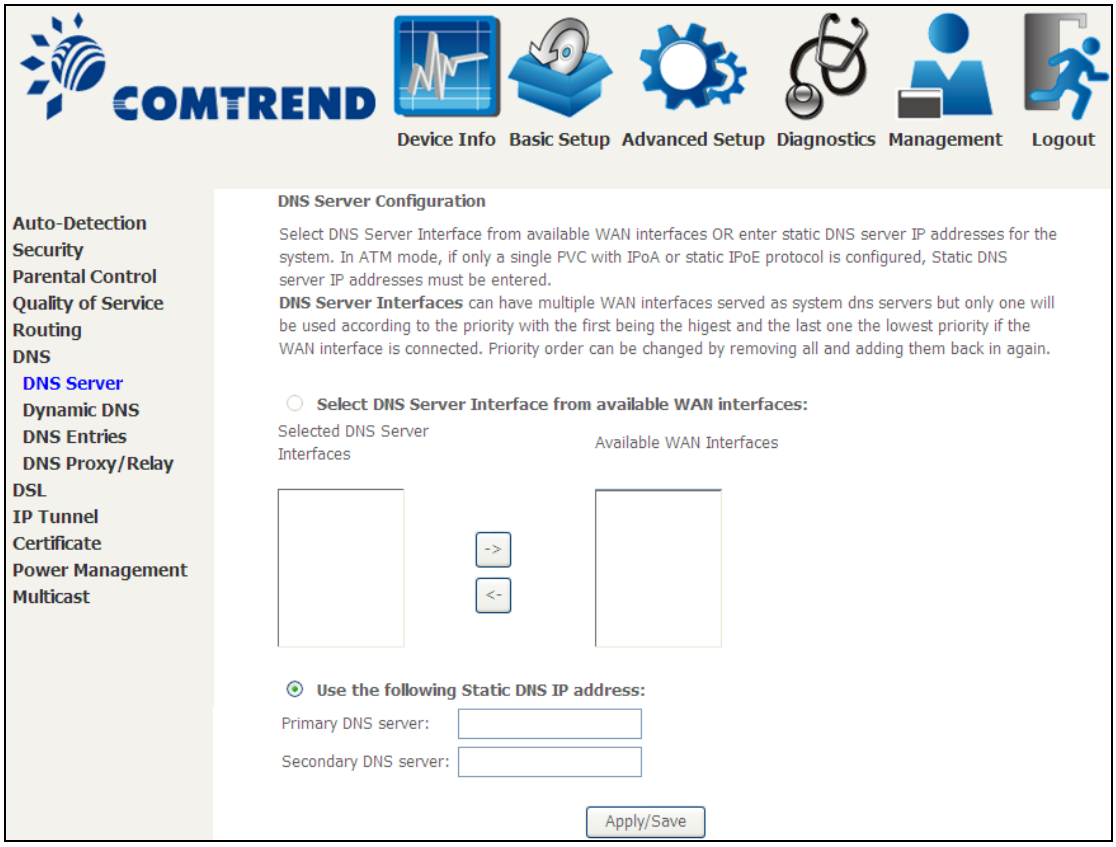

Click **Apply / Save** to save the new configuration.

NOTE: You must reboot the router to make the new configuration effective.

6.6.2 Dynamic DNS

The Dynamic DNS service allows you to map a dynamic IP address to a static hostname in any of many domains, allowing the VR-3030 to be more easily accessed from various locations on the Internet.

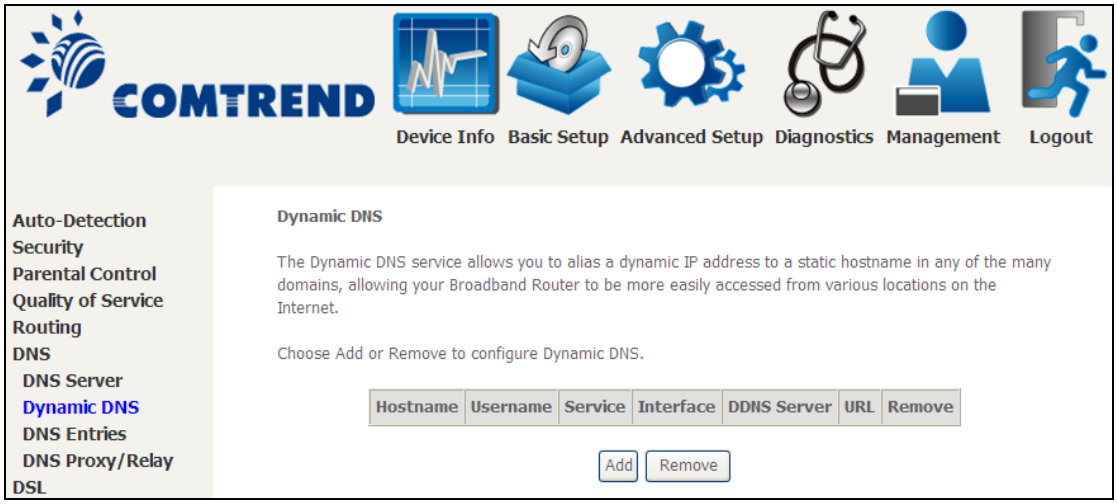

To add a dynamic DNS service, click **Add**. The following screen will display.

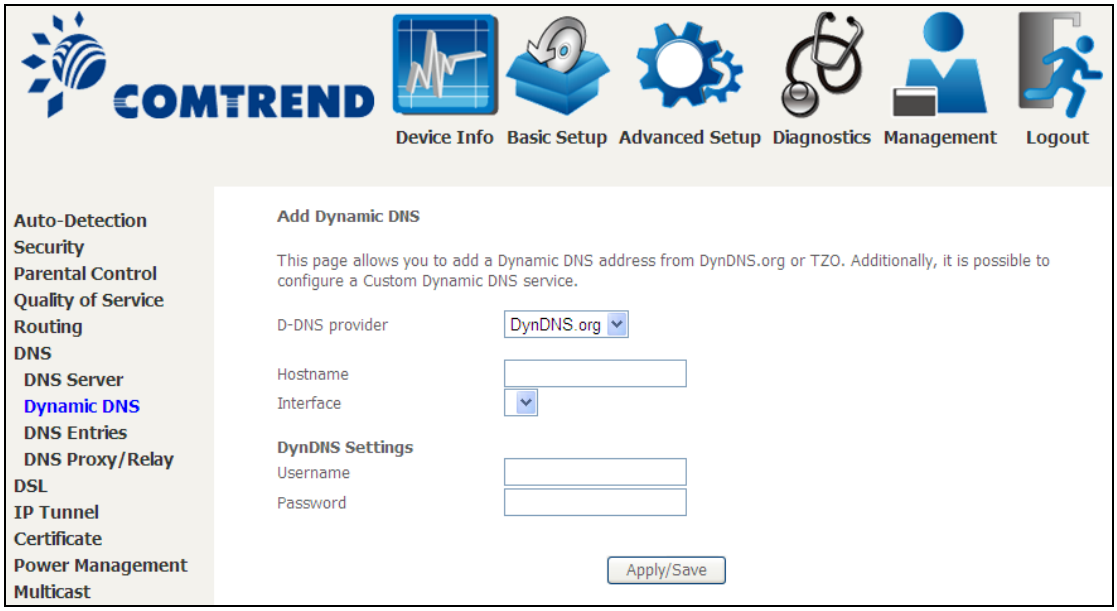

Click Apply/Save to save your settings.

Consult the table below for field descriptions.

Field	Description
D-DNS provider	Select a dynamic DNS provider from the list
Hostname	Enter the name of the dynamic DNS server
Interface	Select the interface from the list
Username	Enter the username of the dynamic DNS server
Password	Enter the password of the dynamic DNS server

6.6.3 DNS Entries

The DNS Entry page allows you to add domain names and IP address desired to be resolved by the DSL router.

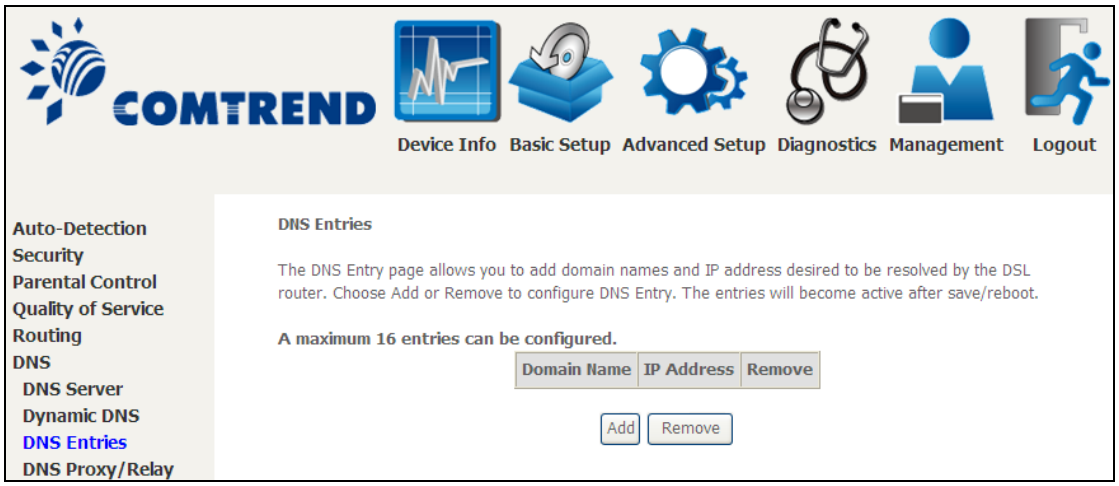

Choose Add or Remove to configure DNS Entry. The entries will become active after save/reboot.

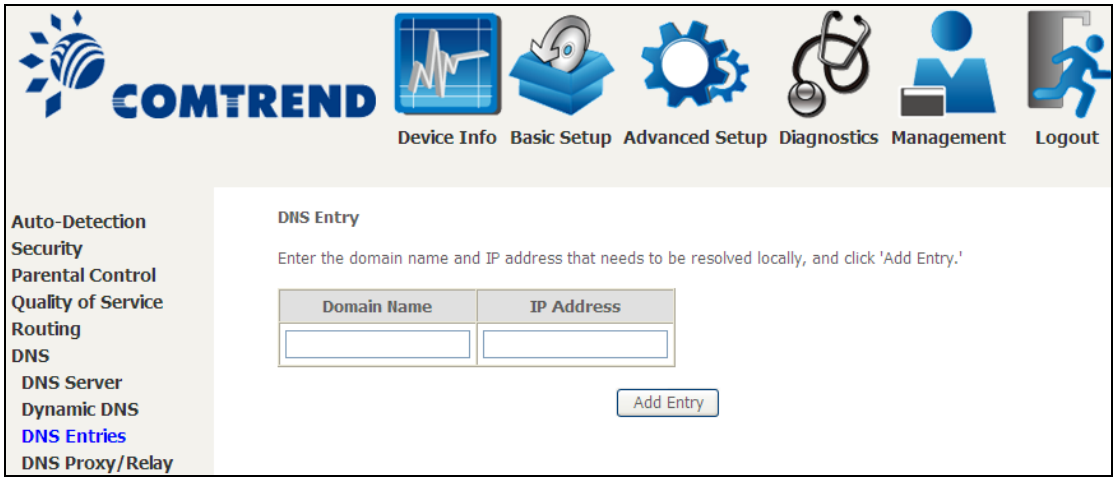

Enter the domain name and IP address that needs to be resolved locally, and click the Add Entry button.

6.6.4 DNS Proxy / Relay

DNS proxy receives DNS queries and forwards DNS queries to the Internet. After the CPE gets answers from the DNS server, it replies to the LAN clients. Configure DNS proxy with the default setting, when the PC gets an IP via DHCP, the domain name, Home, will be added to PC's DNS Suffix Search List, and the PC can access route with "Comtrend.Home".

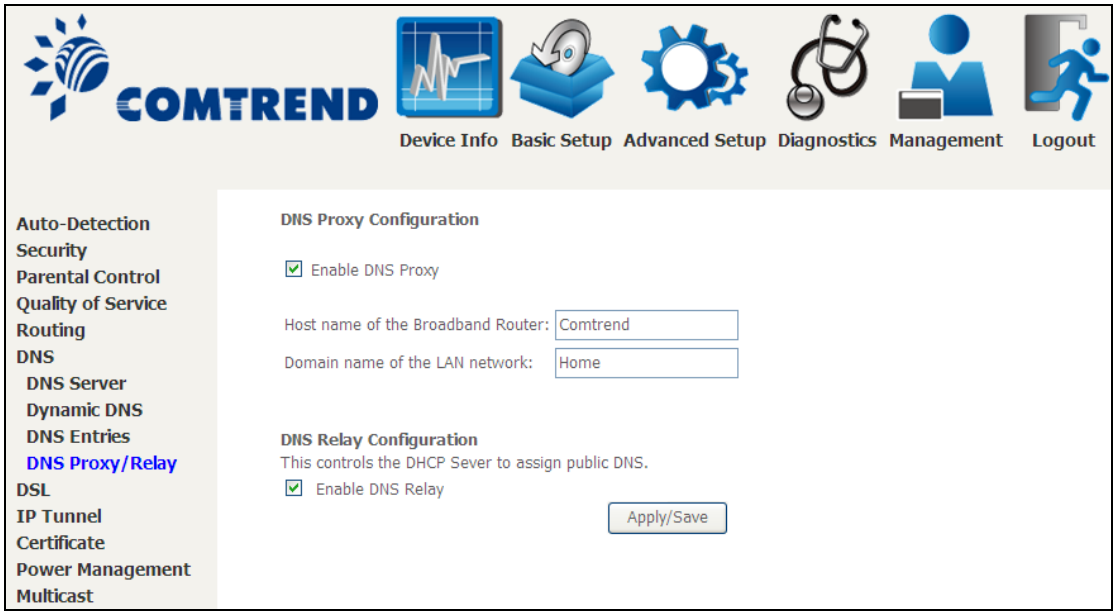

6.7 DSL

The DSL Settings screen allows for the selection of DSL modulation modes.
For optimum performance, the modes selected should match those of your ISP.

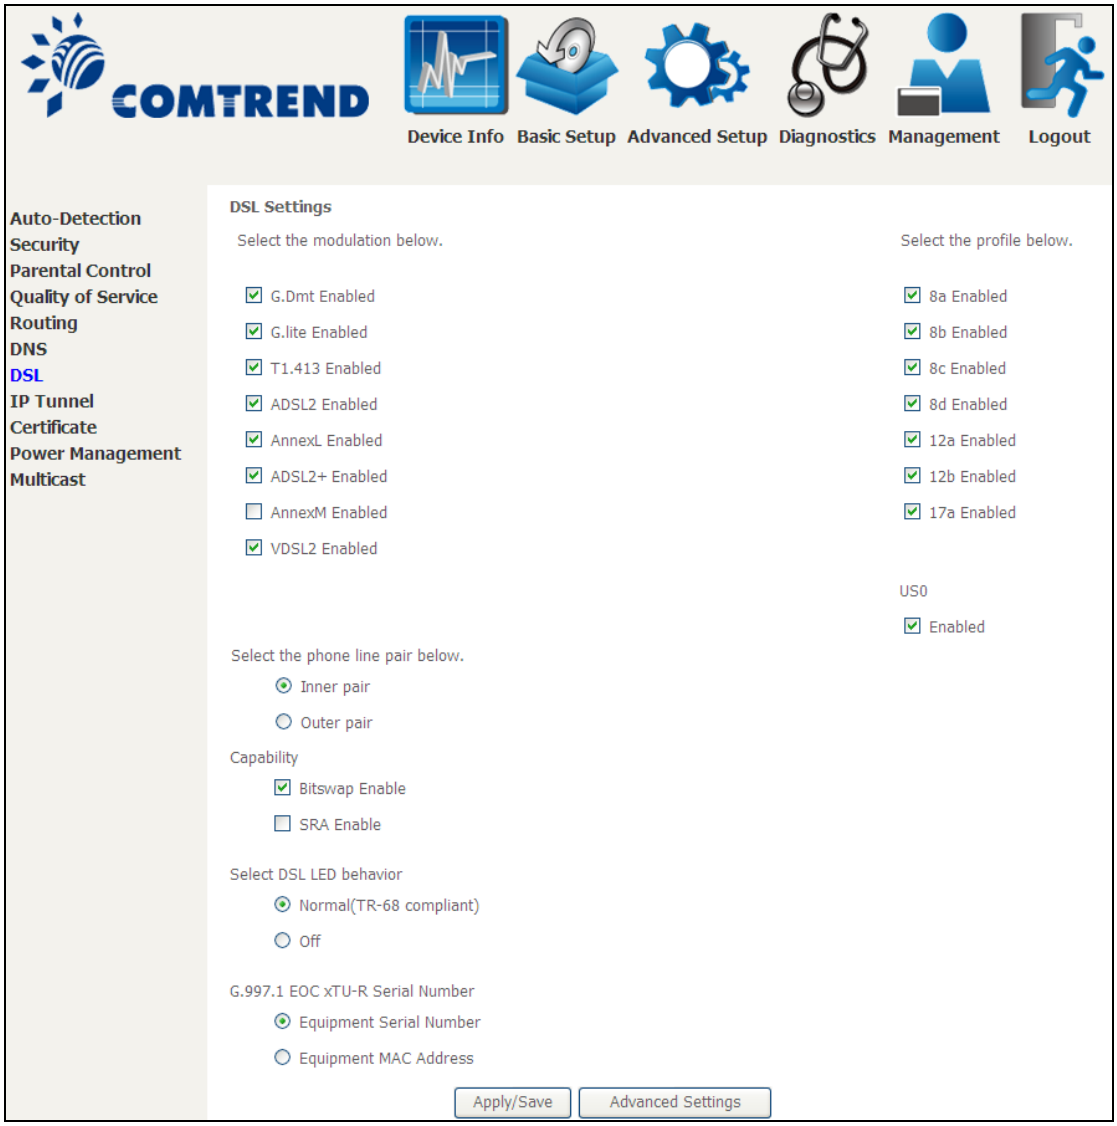

DSL Mode	Data Transmission Rate - Mbps (Megabits per second)	
G.Dmt	Downstream: 12 Mbps	Upstream: 1.3 Mbps
G.lite	Downstream: 4 Mbps	Upstream: 0.5 Mbps
T1.413	Downstream: 8 Mbps	Upstream: 1.0 Mbps
ADSL2	Downstream: 12 Mbps	Upstream: 1.0 Mbps
AnnexL	Supports longer loops but with reduced transmission rates	
ADSL2+	Downstream: 24 Mbps	Upstream: 1.0 Mbps
AnnexM	Downstream: 24 Mbps	Upstream: 3.5 Mbps
VDSL2	Downstream: 100 Mbps	Upstream: 60 Mbps

DSL Mode	Data Transmission Rate - Mbps (Megabits per second)
Options	**Description**
Inner/Outer Pair	Select the inner or outer pins of the twisted pair (RJ11 cable)
Bitswap Enable	Enables adaptive handshaking functionality
SRA Enable	Enables Seamless Rate Adaptation (SRA)
Select DSL LED behavior	Normal (TR-68 compliant): Select this option for DSL LED to operate normally (See menu 2.2 LED Indicator) Off: DSL LED will always be OFF
G997.1 EOC xTU-R Serial Number	Select Equipment Serial Number or Equipment MAC Address to use router's serial number or MAC address in ADSL EOC messages

Advanced DSL Settings

Click **Advanced Settings** to reveal additional options.

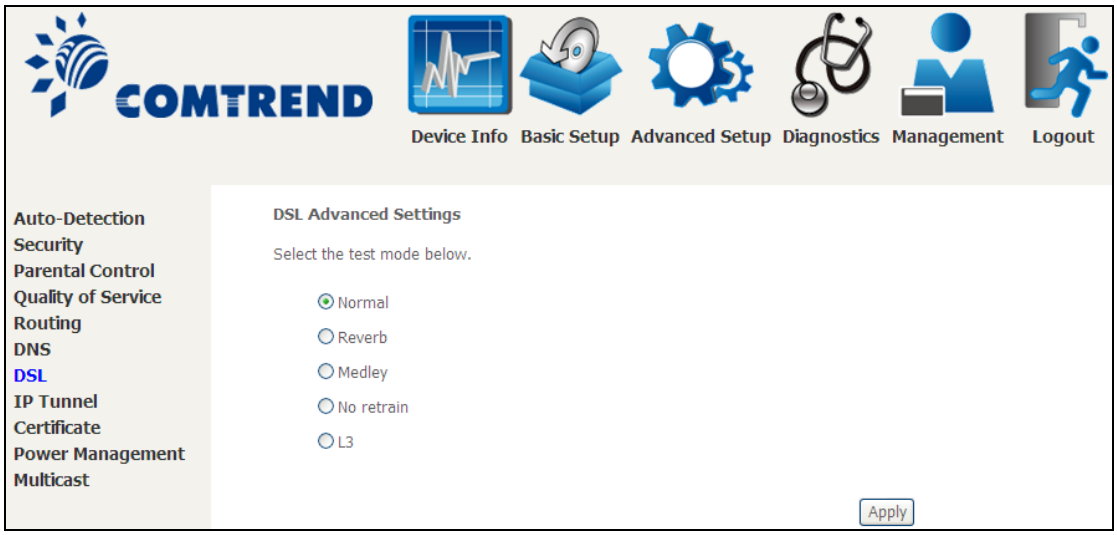

On this screen you select the required test mode, then click the **Apply** button.

Field	Description
Normal	DSL line signal is detected and sent normally
Reverb	DSL line signal is sent continuously in reverb mode
Medley	DSL line signal is sent continuously in medley mode
No Retrain	DSL line signal will always be on even when DSL line is unplugged
L3	DSL line is set in L3 power mode

6.8 IP Tunnel

6.8.1 IPv6inIPv4

Configure 6in4 tunneling to encapsulate IPv6 traffic over explicitly-configured IPv4 links.

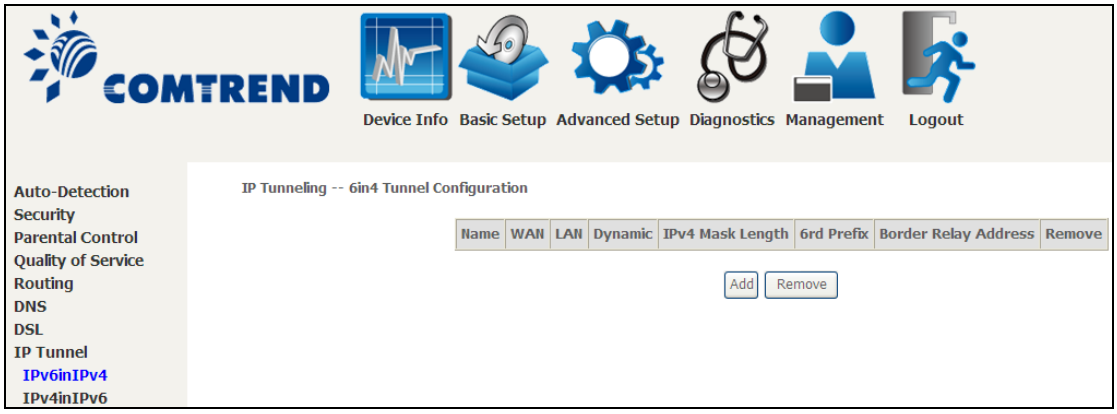

Click the **Add** button to display the following.

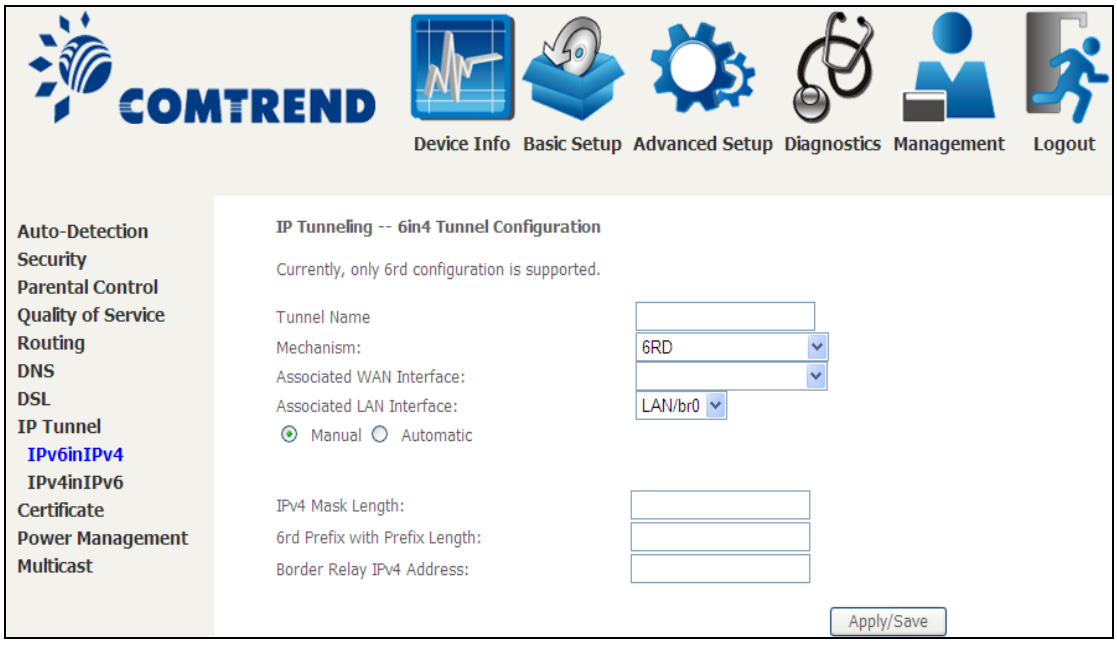

Options	Description
Tunnel Name	Input a name for the tunnel
Mechanism	Mechanism used by the tunnel deployment
Associated WAN Interface	Select the WAN interface to be used by the tunnel
Associated LAN Interface	Select the LAN interface to be included in the tunnel
Manual/Automatic	Select automatic for point-to-multipoint tunneling / manual for point-to-point tunneling

Options	Description
IPv4 Mask Length	The subnet mask length used for the IPv4 interface
6rd Prefix with Prefix Length	Prefix and prefix length used for the IPv6 interface
Border Relay IPv4 Address	Input the IPv4 address of the other device

6.8.2 IPv4inIPv6

Configure 4in6 tunneling to encapsulate IPv4 traffic over an IPv6-only environment.

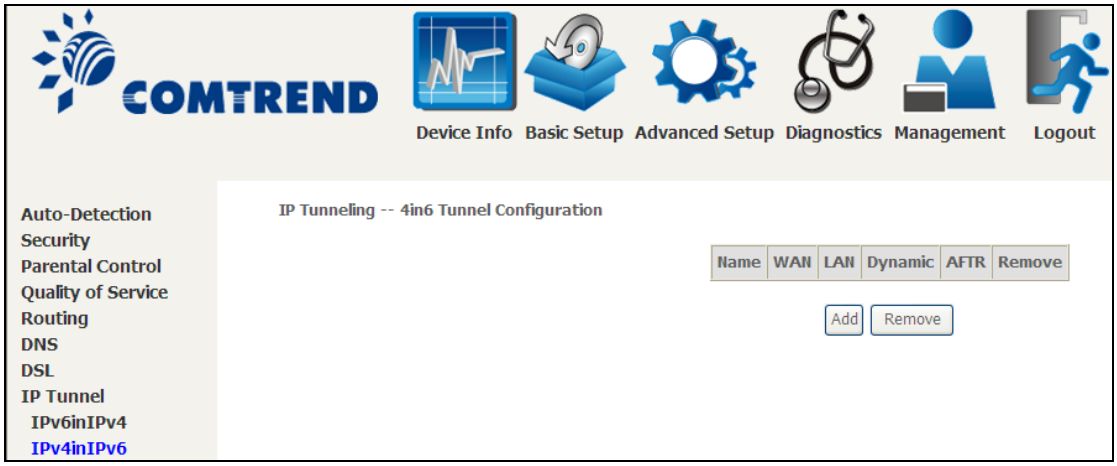

Click the **Add** button to display the following.

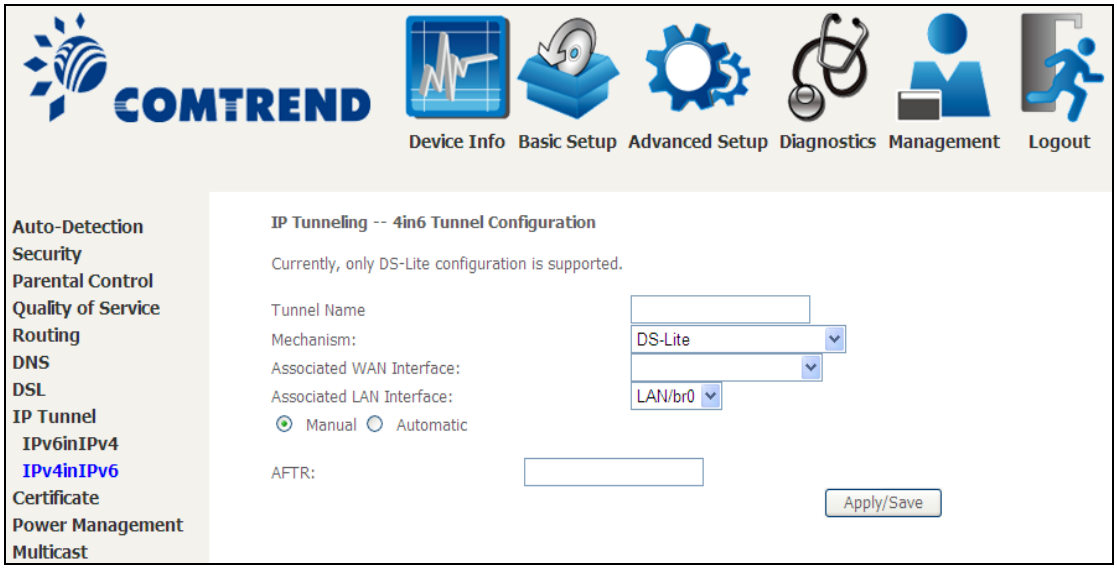

Options	Description
Tunnel Name	Input a name for the tunnel
Mechanism	Mechanism used by the tunnel deployment
Associated WAN Interface	Select the WAN interface to be used by the tunnel
Associated LAN Interface	Select the LAN interface to be included in the tunnel
Manual/Automatic	Select automatic for point-to-multipoint tunneling / manual for point-to-point tunneling
AFTR	Address of Address Family Translation Router

6.9 Certificate

A certificate is a public key, attached with its owner's information (company name, server name, personal real name, contact e-mail, postal address, etc) and digital signatures. There will be one or more digital signatures attached to the certificate, indicating that these entities have verified that this certificate is valid.

6.9.1 Local

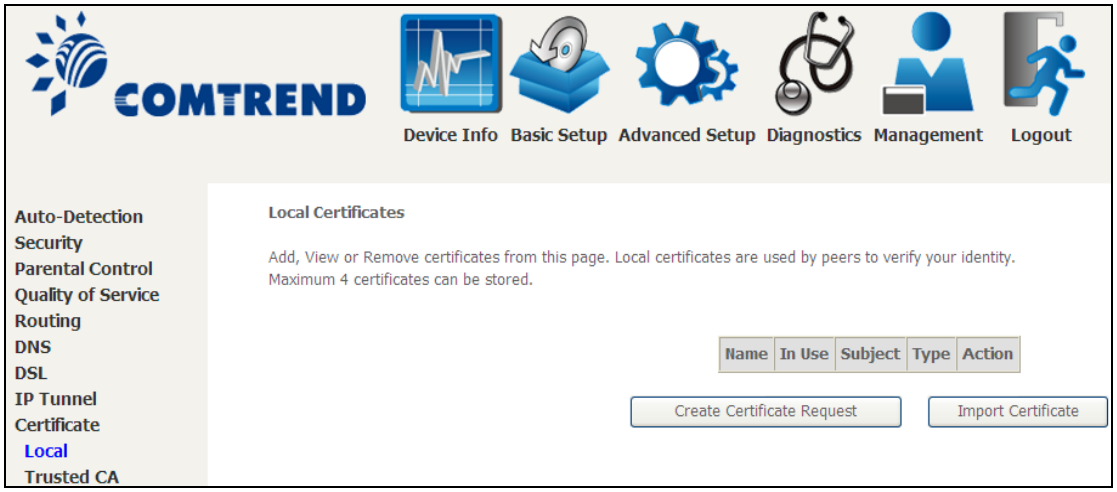

CREATE CERTIFICATE REQUEST

Click **Create Certificate Request** to generate a certificate-signing request.

The certificate-signing request can be submitted to the vendor/ISP/ITSP to apply for a certificate. Some information must be included in the certificate-signing request. Your vendor/ISP/ITSP will ask you to provide the information they require and to provide the information in the format they regulate. Enter the required information and click **Apply** to generate a private key and a certificate-signing request.

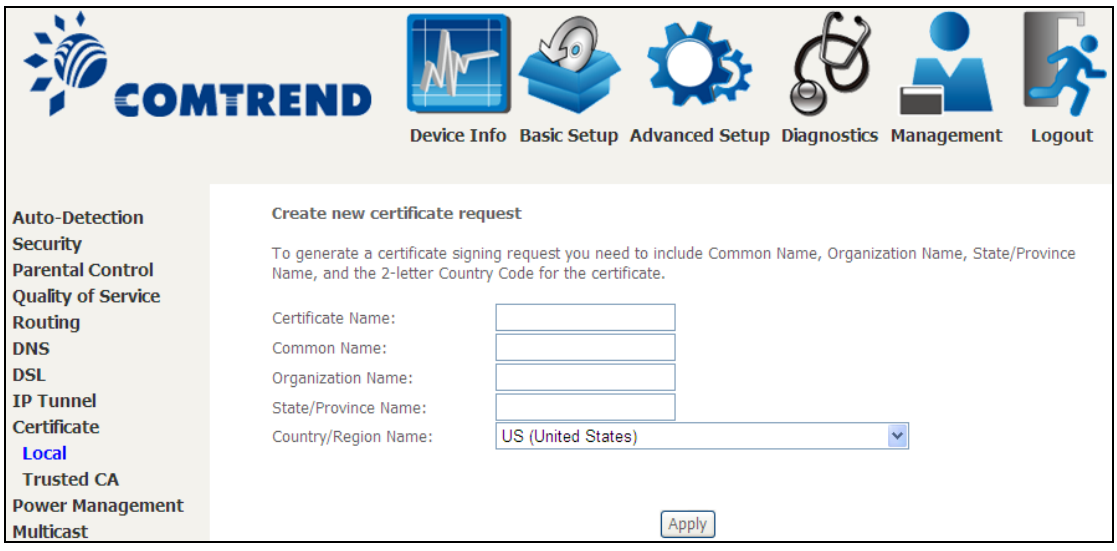

The following table is provided for your reference.

Field	Description
Certificate Name	A user-defined name for the certificate.
Common Name	Usually, the fully qualified domain name for the machine.
Organization Name	The exact legal name of your organization. Do not abbreviate.
State/Province Name	The state or province where your organization is located. It cannot be abbreviated.
Country/Region Name	The two-letter ISO abbreviation for your country.

IMPORT CERTIFICATE

Click **Import Certificate** to paste the certificate content and the private key provided by your vendor/ISP/ITSP into the corresponding boxes shown below.

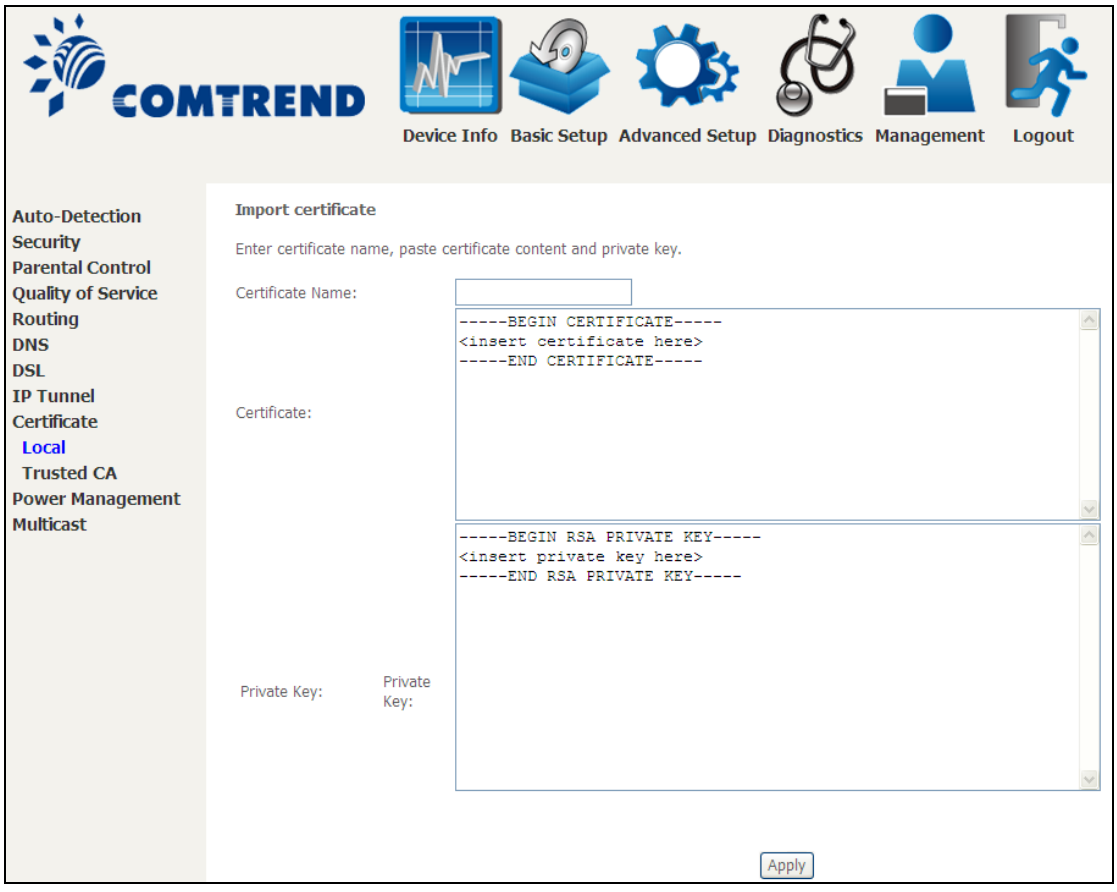

Enter a certificate name and click the **Apply** button to import the certificate and its private key.

6.9.2 Trusted CA

CA is an abbreviation for Certificate Authority, which is a part of the X.509 system. It is itself a certificate, attached with the owner information of this certificate authority; but its purpose is not encryption/decryption. Its purpose is to sign and issue certificates, in order to prove that these certificates are valid.

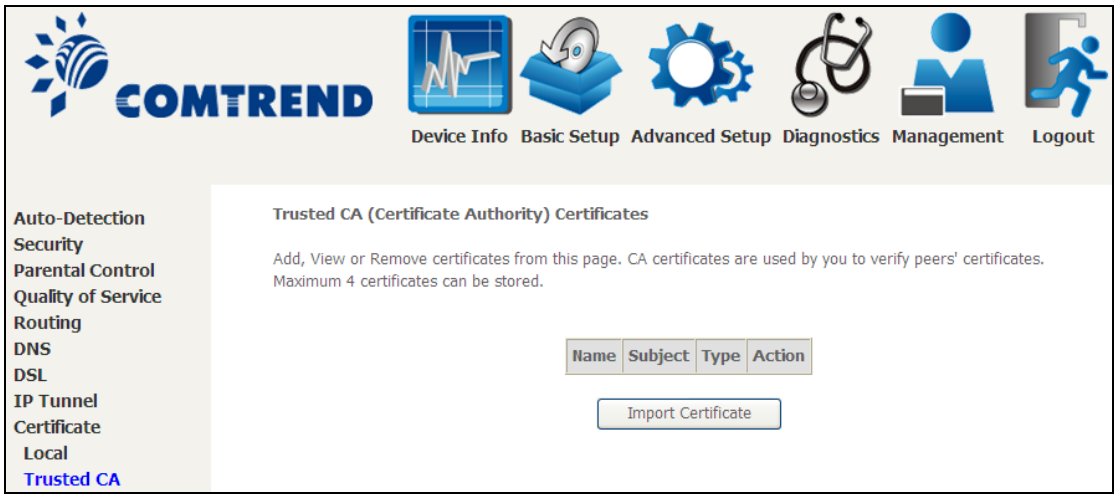

Click **Import Certificate** to paste the certificate content of your trusted CA. The CA certificate content will be provided by your vendor/ISP/ITSP and is used to authenticate the Auto-Configuration Server (ACS) that the CPE will connect to.

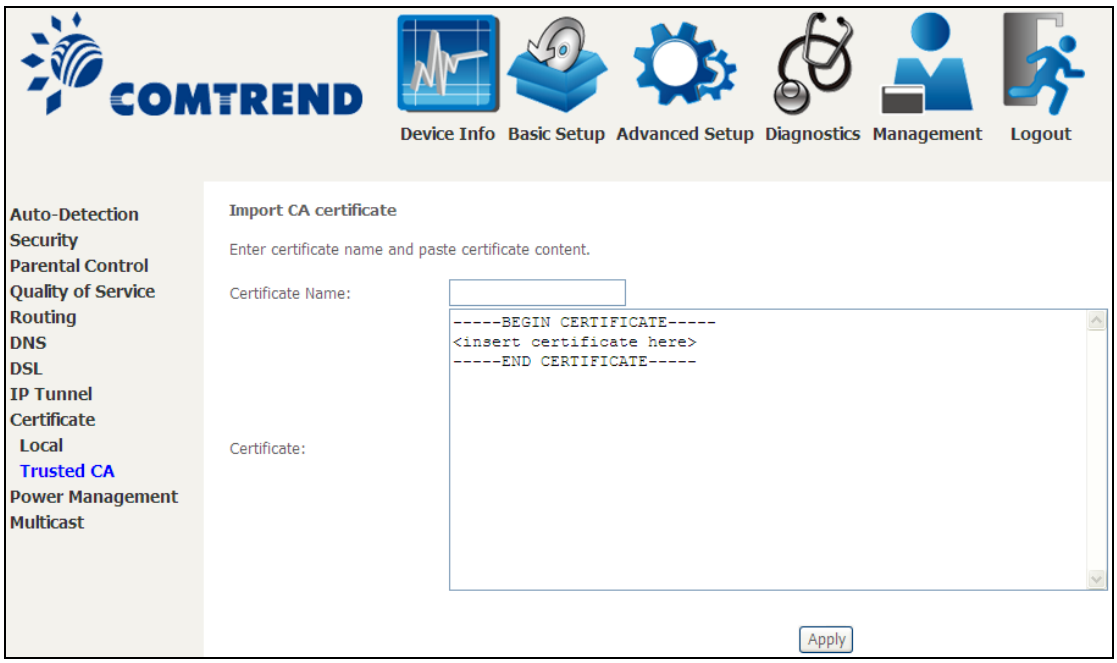

Enter a certificate name and click **Apply** to import the CA certificate.

6.10 Power Management

This screen allows for control of hardware modules to evaluate power consumption. Use the buttons to select the desired option, click **Apply** and check the response.

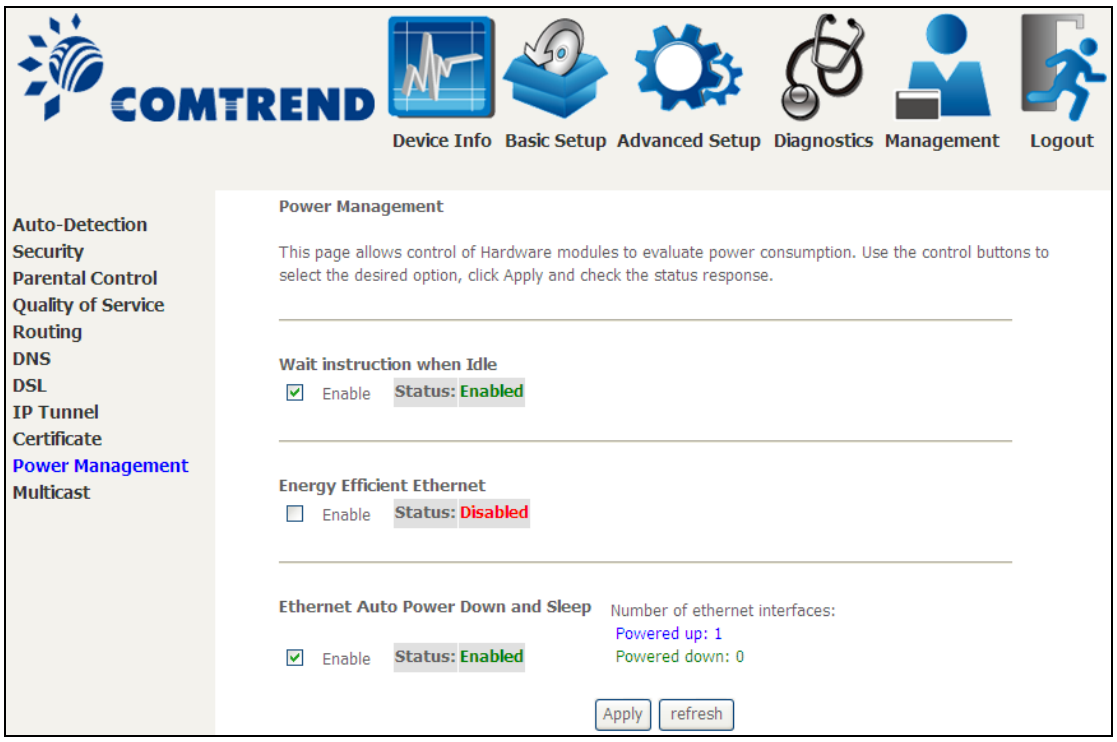

6.11 Multicast

Input new IGMP or MLD protocol configuration fields if you want modify default values shown. Then click **Apply / Save**.

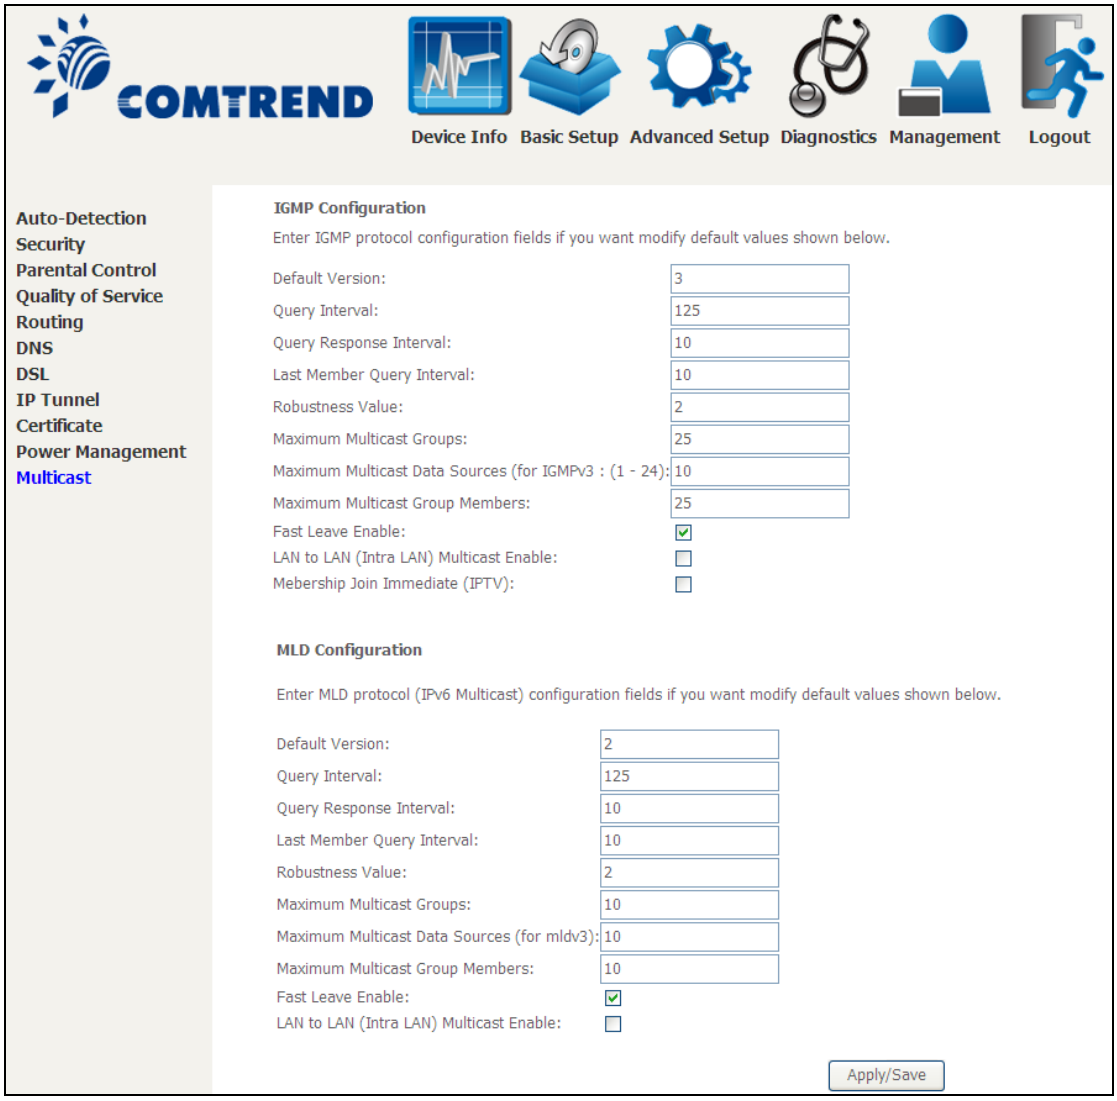

Field	Description
Default Version	Define IGMP using version with video server.
Query Interval	The query interval is the amount of time in seconds between IGMP General Query messages sent by the router (if the router is the querier on this subnet). The default query interval is 125 seconds.

Field	Description
Query Response Interval	The query response interval is the maximum amount of time in seconds that the IGMP router waits to receive a response to a General Query message. The query response interval is the Maximum Response Time field in the IGMP v2 Host Membership Query message header. The default query response interval is 10 seconds and must be less than the query interval.
Last Member Query Interval	The last member query interval is the amount of time in seconds that the IGMP router waits to receive a response to a Group-Specific Query message. The last member query interval is also the amount of time in seconds between successive Group-Specific Query messages. The default last member query interval is 10 seconds.
Robustness Value	The robustness variable is a way of indicating how susceptible the subnet is to lost packets. IGMP can recover from robustness variable minus 1 lost IGMP packets. The robustness variable should be set to a value of 2 or greater. The default robustness variable value is 2.
Maximum Multicast Groups	Setting the maximum number of Multicast groups.
Maximum Multicast Data Sources (for IGMPv3)	Define the maximum multicast video stream number.
Maximum Multicast Group Members	Setting the maximum number of groups that ports can accept.
Fast Leave Enable	When you enable IGMP fast-leave processing, the switch immediately removes a port when it detects an IGMP version 2 leave message on that port.
LAN to LAN (Intra LAN) Multicast Enable	This will activate IGMP snooping for cases where multicast data source and player are all located on the LAN side.
Membership to join Immediate (IPTV)	Enable IGMP immediate join feature for multicast membership group.

Chapter 7 Diagnostics

You can reach this page by clicking on the following icon located at the top of the screen.

7.1 Diagnostics – Individual Tests

The first Diagnostics screen is a dashboard that shows overall connection status.

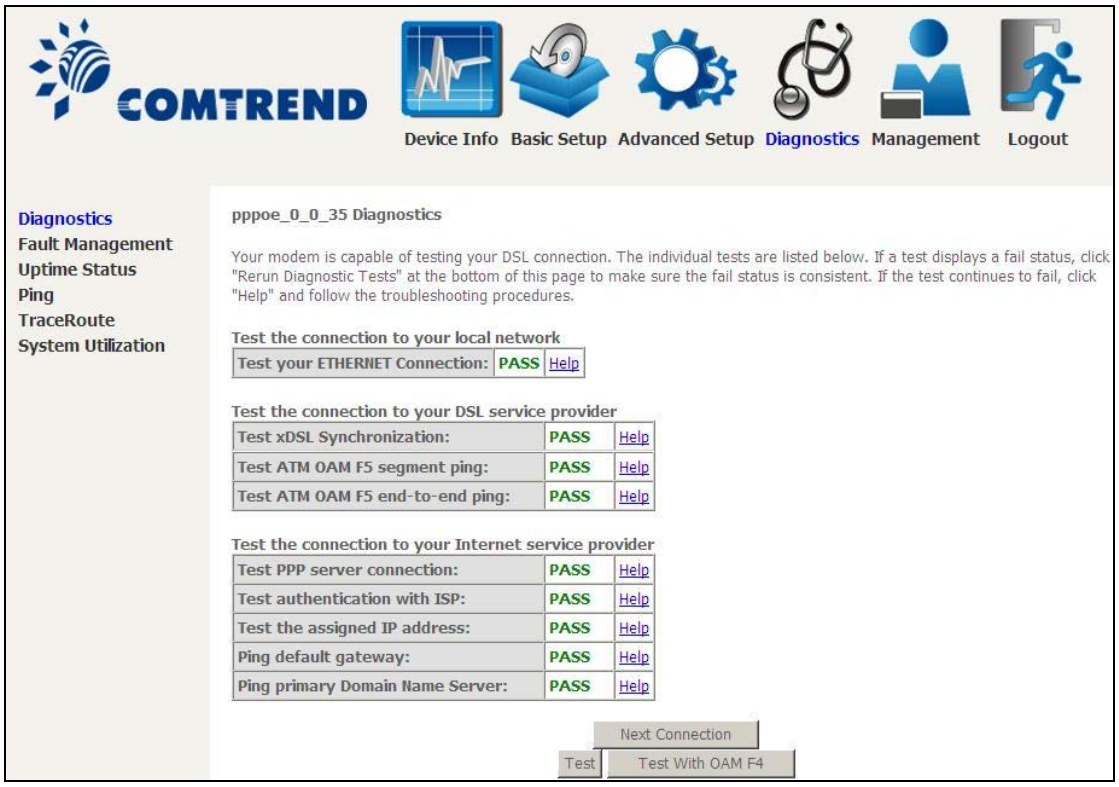

7.2 Fault Management

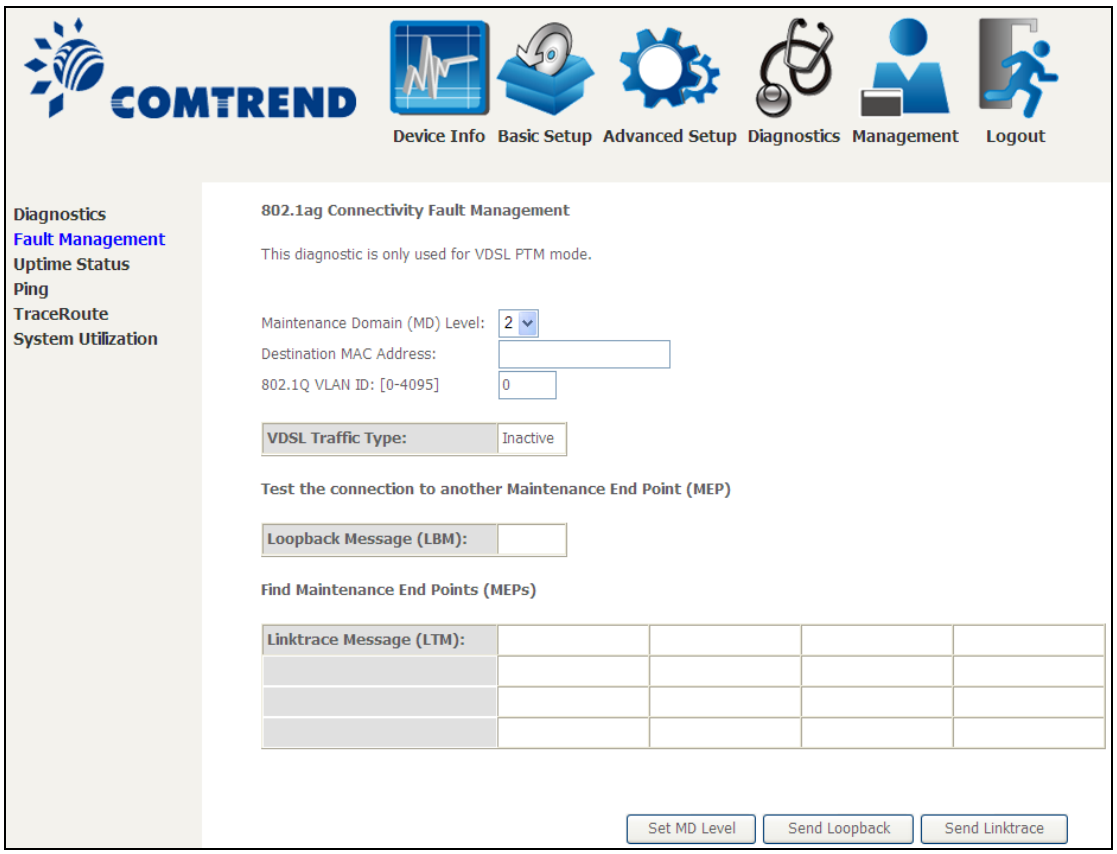

Item	Description
Maintenance Domain (MD) Level	Management space on the network, the larger the domain, the higher the level value
Destination MAC Address	Destination MAC address for sending the loopback message
802.1Q VLAN ID: [0-4095]	802.1Q VLAN used in VDSL PTM mode

Set MD Level
Save the Maintenance domain level.

Send Loopback
Send loopback message to destination MAC address.

Send Linktrace
Send traceroute message to destination MAC address.

7.3 Uptime Status

This page shows System, DSL, ETH and Layer 3 uptime. If the DSL line, ETH or Layer 3 connection is down, the uptime will stop incrementing. If the service is restored, the counter will reset and start from 0. A Bridge interface will follow the DSL or ETH timer.

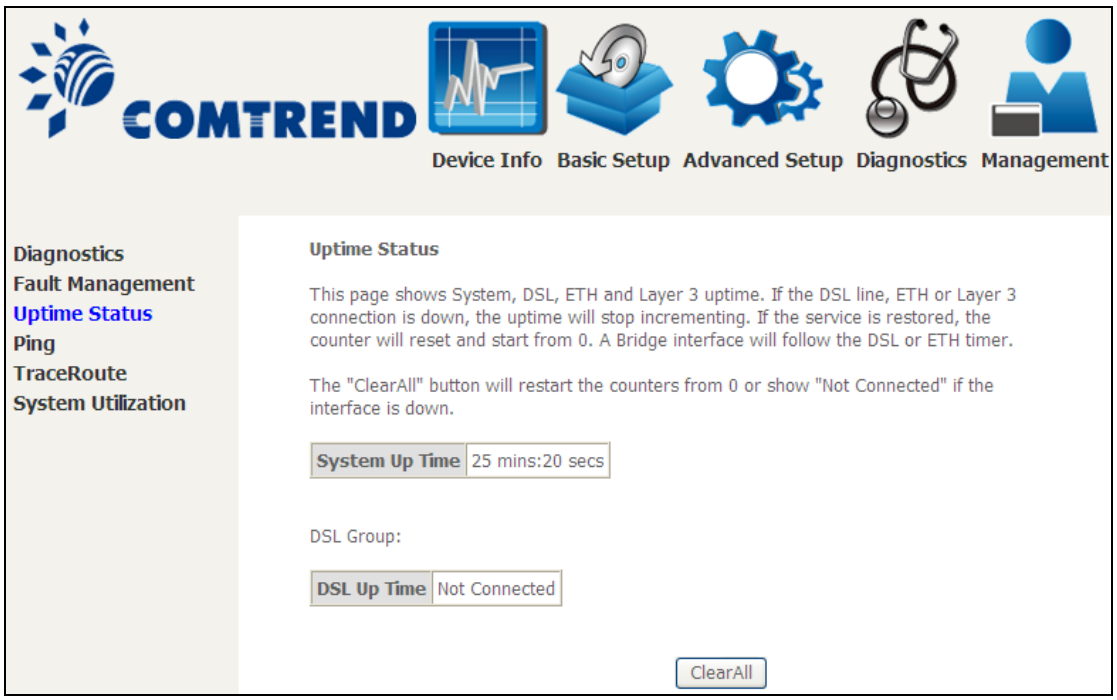

The "ClearAll" button will restart the counters from 0 or show "Not Connected" if the interface is down.

7.4 Ping

Input the IP address/hostname and click the **Ping** button to execute ping diagnostic test to send the ICMP request to the specified host.

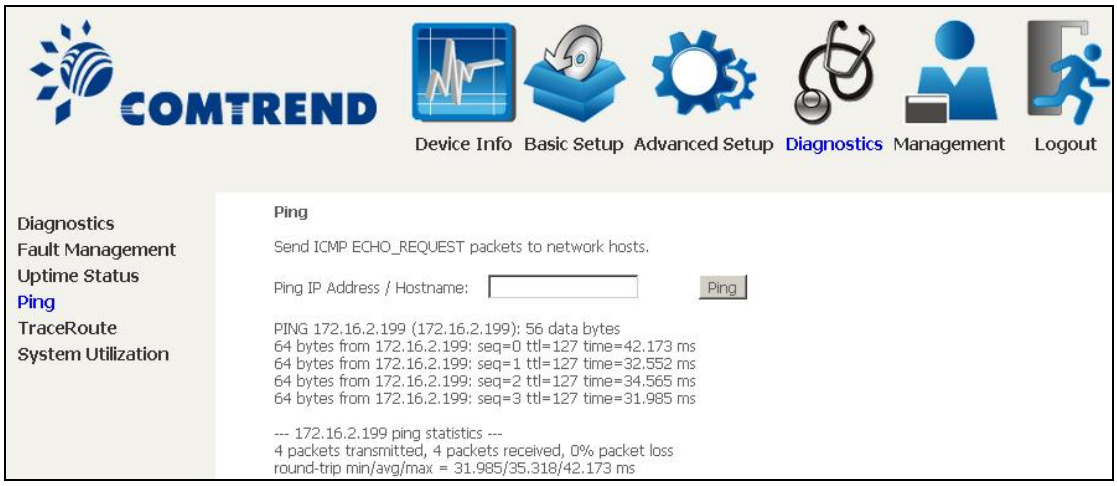

7.5 Trace Route

Input the IP address/hostname and click the **TraceRoute** button to execute the trace route diagnostic test to send the ICMP packets to the specified host.

7.6 System Utilization

Click "Start" button to initialize CPU and Memory utilization calculation.
Please wait 10 seconds for the test to run.

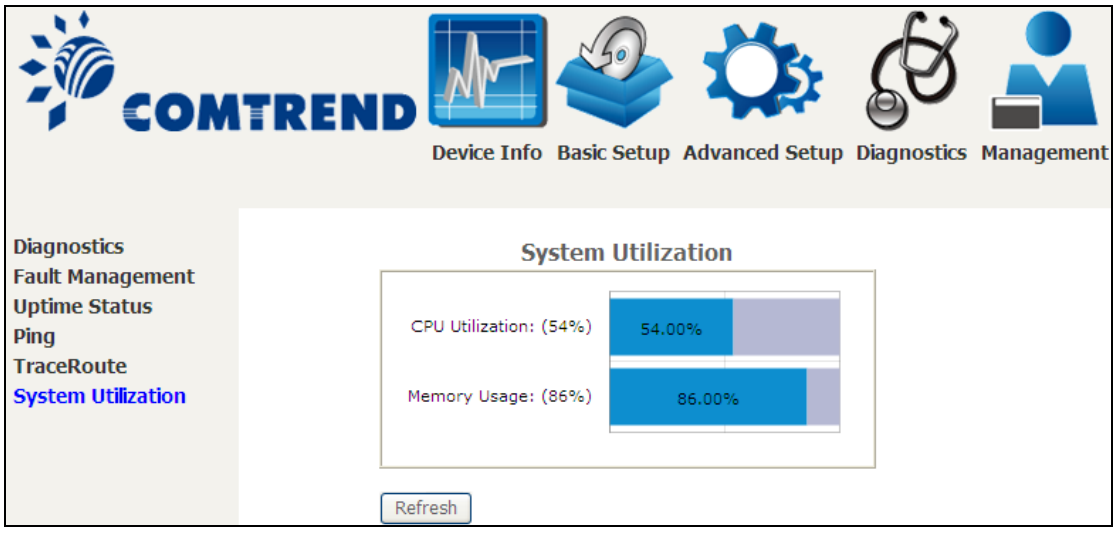

Chapter 8 Management

You can reach this page by clicking on the following icon located at the top of the screen.

The Management menu has the following maintenance functions and processes:

8.1 Settings

This includes Backup Settings, Update Settings, and Restore Default screens.

8.1.1 Backup Settings

To save the current configuration to a file on your PC, click **Backup Settings**. You will be prompted for backup file location. This file can later be used to recover settings on the **Update Settings** screen, as described below.

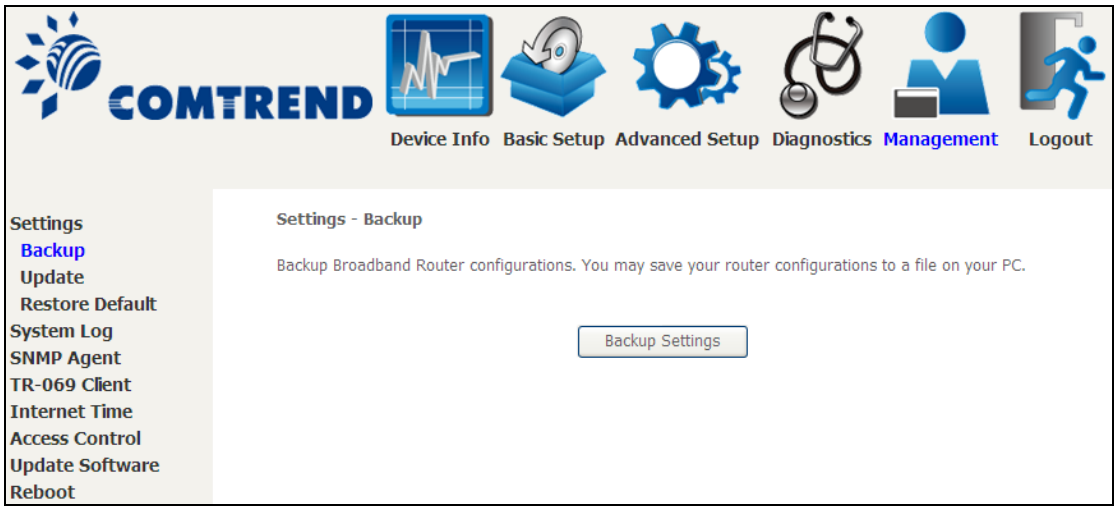

8.1.2 Update Settings

This option recovers configuration files previously saved using **Backup Settings**. Enter the file name (including folder path) in the **Settings File Name** box, or press **Browse…** to search for the file, then click **Update Settings** to recover settings.

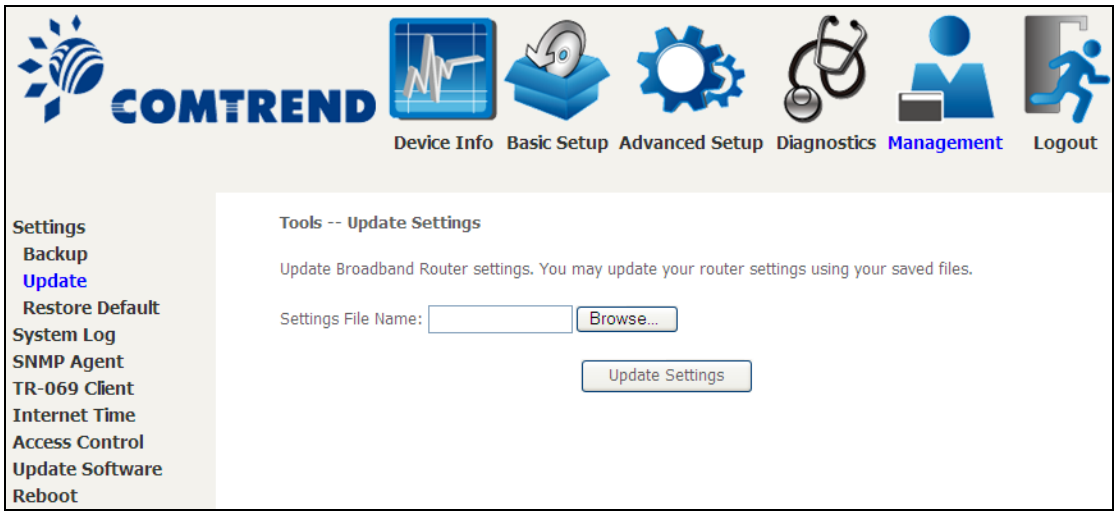

8.1.3 Restore Default

Click **Restore Default Settings** to restore factory default settings.

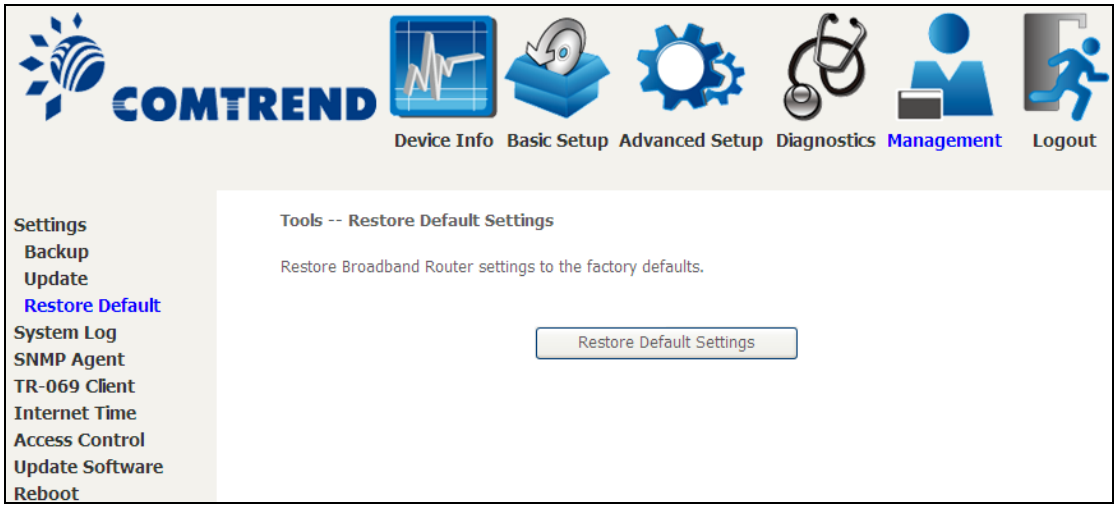

After **Restore Default Settings** is clicked, the following screen appears.

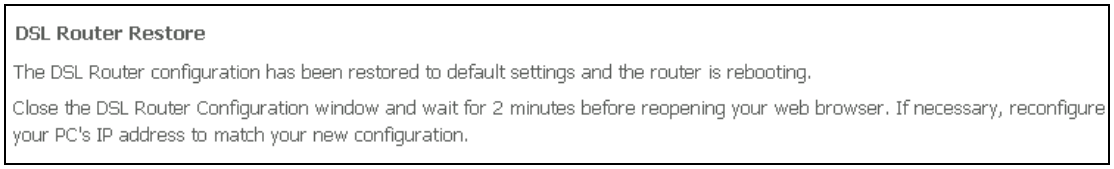

Close the browser and wait for 2 minutes before reopening it. It may also be necessary, to reconfigure your PC IP configuration to match any new settings.

NOTE:	This entry has the same effect as the **Reset** button. The VR-3030 board hardware and the boot loader support the reset to default. If the **Reset** button is continuously pressed for more than 10 seconds, the boot loader will erase the configuration data saved in flash memory.

8.2 System Log

This function allows a system log to be kept and viewed upon request.

Follow the steps below to configure, enable, and view the system log.

STEP 1: Click **Configure System Log**, as shown below (circled in **Red**).

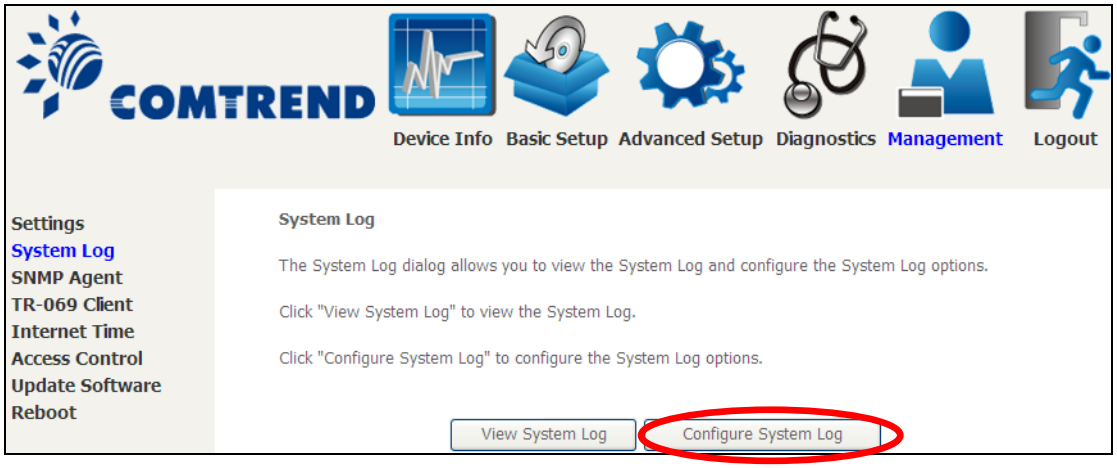

STEP 2: Select desired options and click **Apply / Save**.

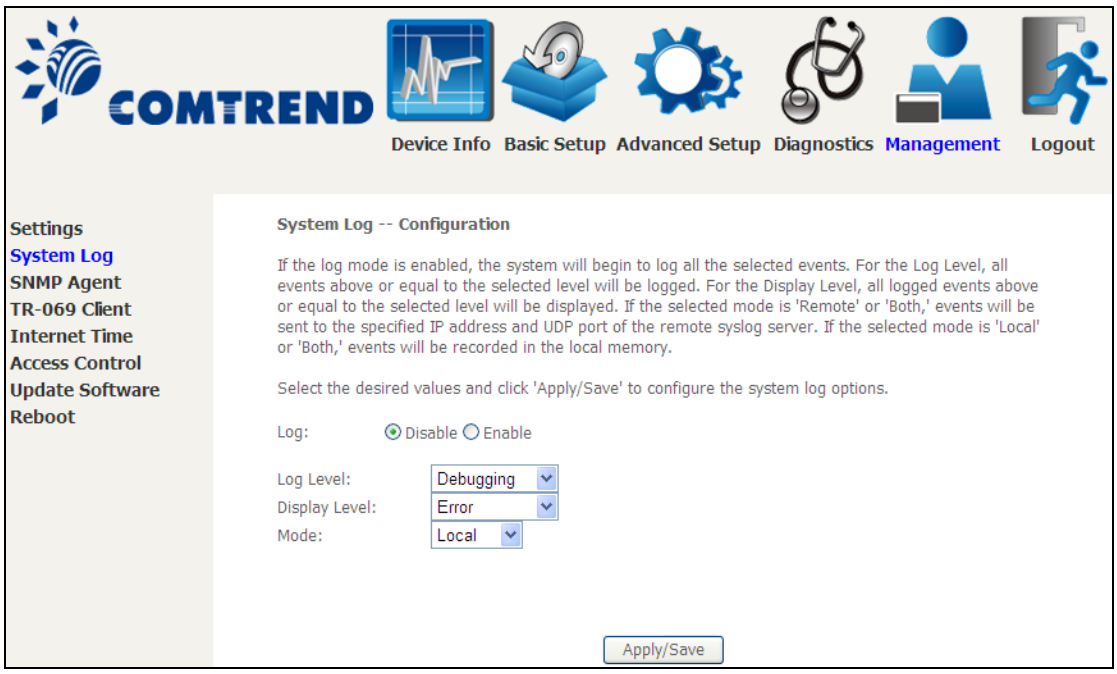

Consult the table below for detailed descriptions of each system log option.

Option	Description
Log	Indicates whether the system is currently recording events. The user can enable or disable event logging. By default, it is disabled. To enable it, select the **Enable** radio button and then click **Apply / Save**.

Option	Description
Log Level	Allows you to configure the event level and filter out unwanted events below this level. The events ranging from the highest critical level "Emergency" down to this configured level will be recorded to the log buffer on the VR-3030 SDRAM. When the log buffer is full, the newer event will wrap up to the top of the log buffer and overwrite the old event. By default, the log level is "Debugging", which is the lowest critical level. The log levels are defined as follows: • Emergency = system is unusable • Alert = action must be taken immediately • Critical = critical conditions • Error = Error conditions • Warning = normal but significant condition • Notice= normal but insignificant condition • Informational= provides information for reference • Debugging = debug-level messages Emergency is the most serious event level, whereas Debugging is the least important. For instance, if the log level is set to Debugging, all the events from the lowest Debugging level to the most critical level Emergency level will be recorded. If the log level is set to Error, only Error and the level above will be logged.
Display Level	Allows the user to select the logged events and displays on the **View System Log** window for events of this level and above to the highest Emergency level.
Mode	Allows you to specify whether events should be stored in the local memory, or be sent to a remote system log server, or both simultaneously. If remote mode is selected, view system log will not be able to display events saved in the remote system log server. When either Remote mode or Both mode is configured, the WEB UI will prompt the user to enter the Server IP address and Server UDP port.

STEP 3: Click **View System Log**. The results are displayed as follows.

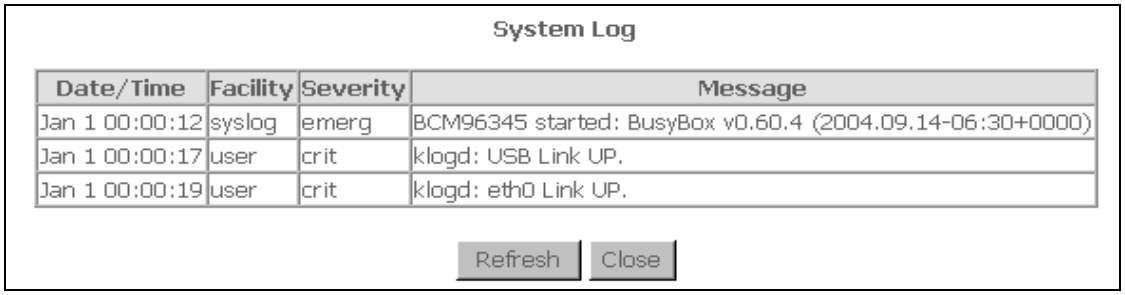

8.3 SNMP Agent

Simple Network Management Protocol (SNMP) allows a management application to retrieve statistics and status from the SNMP agent in this device. Select the **Enable** radio button, configure options, and click **Save / Apply** to activate SNMP.

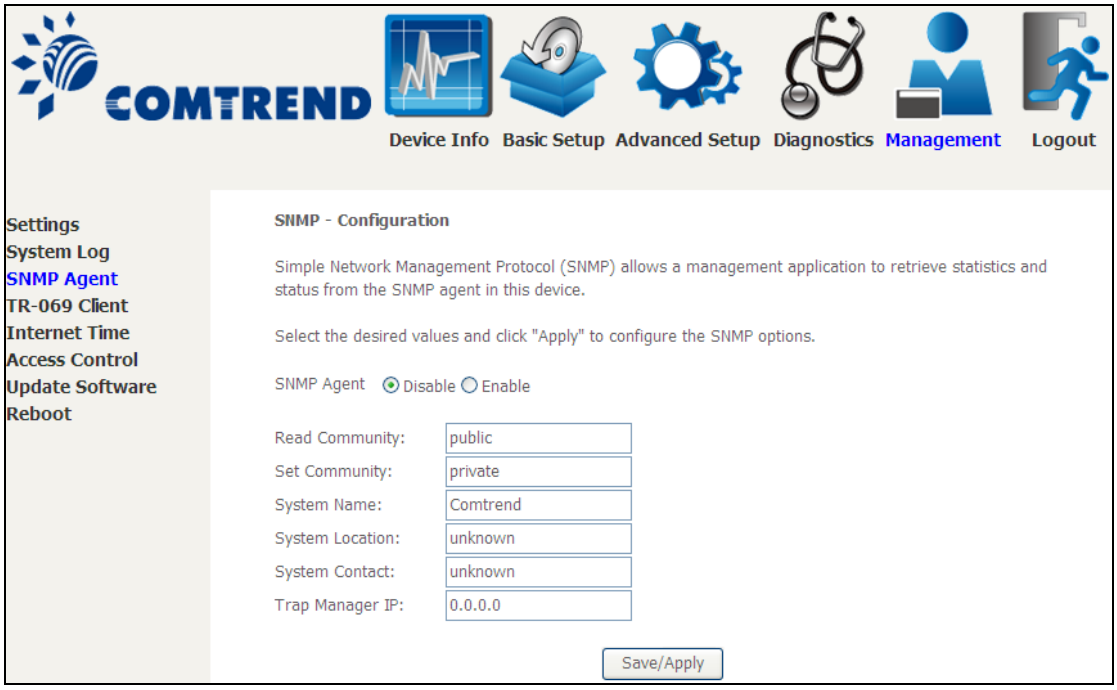

8.4 TR-069 Client

WAN Management Protocol (TR-069) allows an Auto-Configuration Server (ACS) to perform auto-configuration, provision, collection, and diagnostics to this device. Select desired values and click **Apply/Save** to configure TR-069 client options.

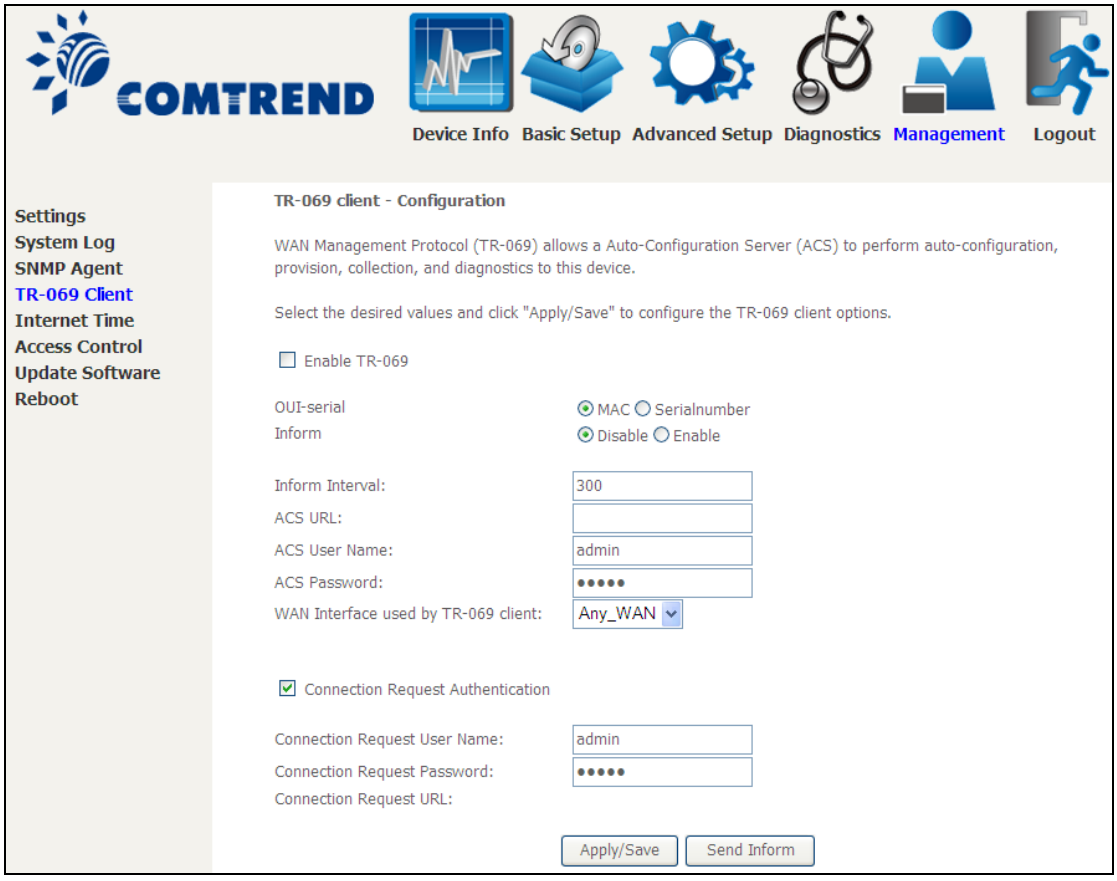

The table below is provided for ease of reference.

Option	Description
Enable TR-069	Tick the checkbox ☑ to enable.
OUI-serial	The serial number used to identify the CPE when making a connection to the ACS using the CPE WAN Management Protocol. Select MAC to use the router's MAC address as serial number to authenticate with ACS or select serial number to use router's serial number.
Inform	Disable/Enable TR-069 client on the CPE.
Inform Interval	The duration in seconds of the interval for which the CPE MUST attempt to connect with the ACS and call the Inform method.

Option	Description
ACS URL	URL for the CPE to connect to the ACS using the CPE WAN Management Protocol. This parameter MUST be in the form of a valid HTTP or HTTPS URL. An HTTPS URL indicates that the ACS supports SSL. The “host” portion of this URL is used by the CPE for validating the certificate from the ACS when using certificate-based authentication.
ACS User Name	Username used to authenticate the CPE when making a connection to the ACS using the CPE WAN Management Protocol. This username is used only for HTTP-based authentication of the CPE.
ACS Password	Password used to authenticate the CPE when making a connection to the ACS using the CPE WAN Management Protocol. This password is used only for HTTP-based authentication of the CPE.
WAN Interface used by TR-069 client	Choose Any_WAN, LAN, Loopback or a configured connection.
Display SOAP messages on serial console	Enable/Disable SOAP messages on serial console. This option is used for advanced troubleshooting of the device.
Connection Request	
Authentication	Tick the checkbox ☑ to enable.
User Name	Username used to authenticate an ACS making a Connection Request to the CPE.
Password	Password used to authenticate an ACS making a Connection Request to the CPE.
URL	IP address and port the ACS uses to connect to router.

The **Send Inform** button forces the CPE to establish an immediate connection to the ACS.

8.5 Internet Time

This option automatically synchronizes the router time with Internet timeservers. To enable time synchronization, tick the corresponding checkbox ☑, choose your preferred time server(s), select the correct time zone offset, and click **Save / Apply**.

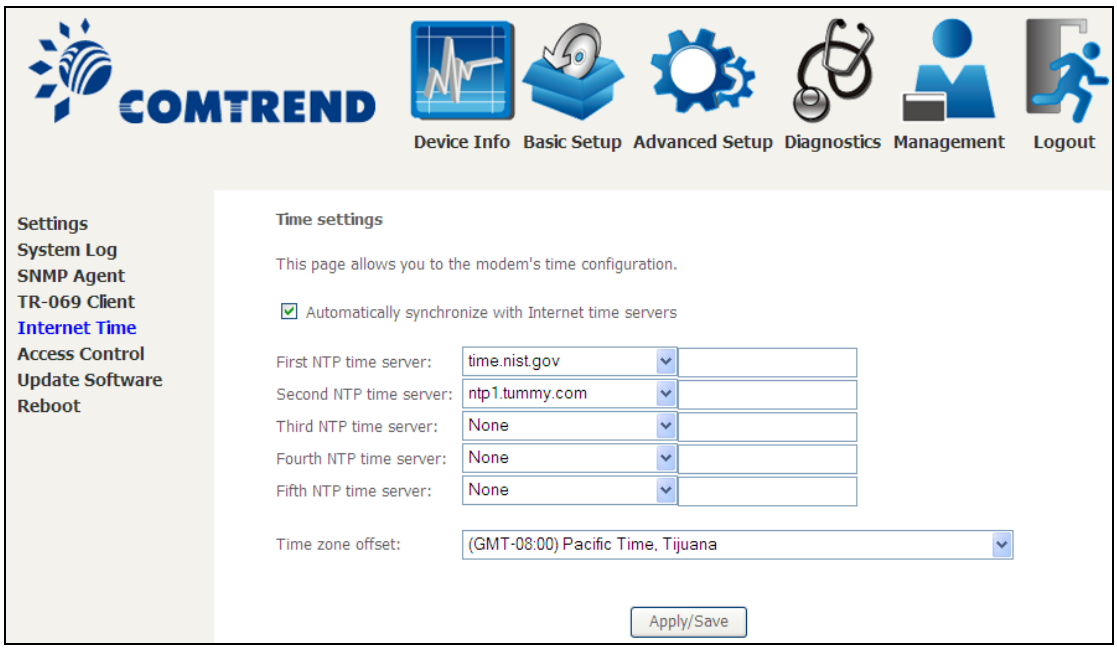

NOTE:	Internet Time must be activated to use Parental Control. In addition, this menu item is not displayed when in Bridge mode since the router would not be able to connect to the NTP timeserver.

8.6 Access Control

8.6.1 Passwords

This screen is used to configure the user account access passwords for the device. Access to the VR-3030 is controlled through the following user accounts:

- The root account has unrestricted access to view and change the configuration of your Broadband router.
- The support account is typically utilized by Carrier/ISP technicians for maintenance and diagnostics.
- The user account is typically utilized by End-Users to view configuration settings and statistics, with limited ability to configure certain settings.

Use the fields to update passwords for the accounts, add/remove accounts (max of 5 accounts) as well as adjust their specific privileges.

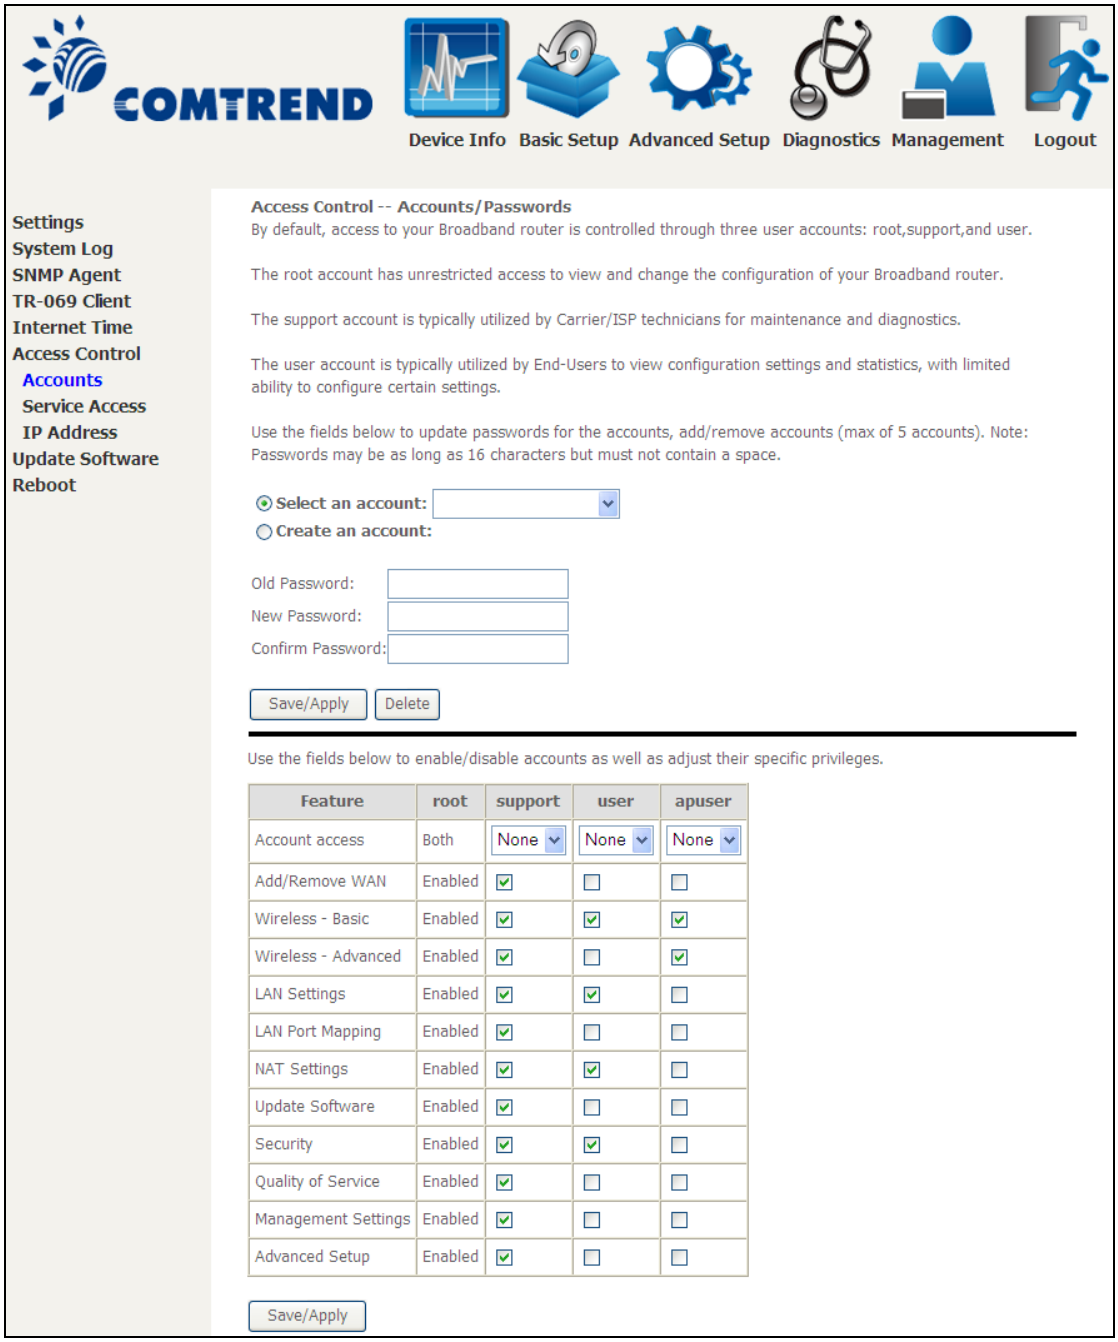

Note: Passwords may be as long as 16 characters but must not contain a space. Click **Save / Apply** to continue.

8.6.2 Service Access

The Services option limits or opens the access services over the LAN or WAN. These access services available are: FTP, HTTP, ICMP, SNMP, TELNET and TFTP. Enable a service by selecting its dropdown listbox. Click **APPLY/ SAVE** to activate.

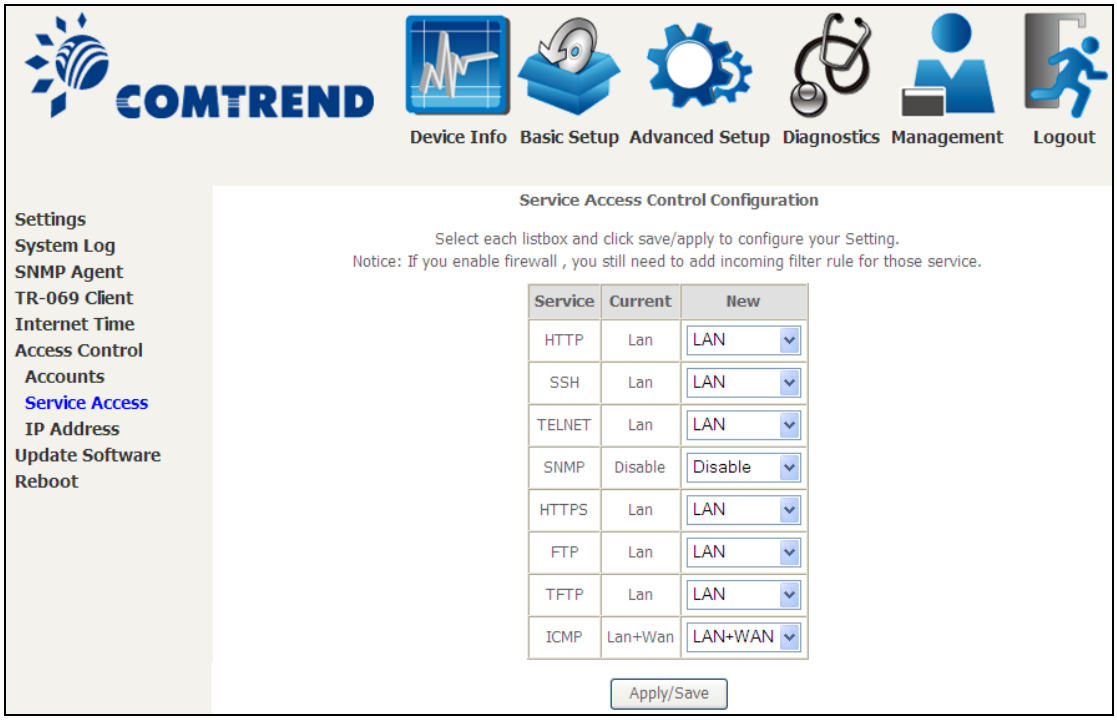

8.6.3 IP Address

The IP Address Access Control mode, if enabled, permits access to local management services from IP addresses contained in the Access Control List. If the Access Control mode is disabled, the system will not validate IP addresses for incoming packets. The services are the system applications listed in the Service Control List **beside ICMP**.

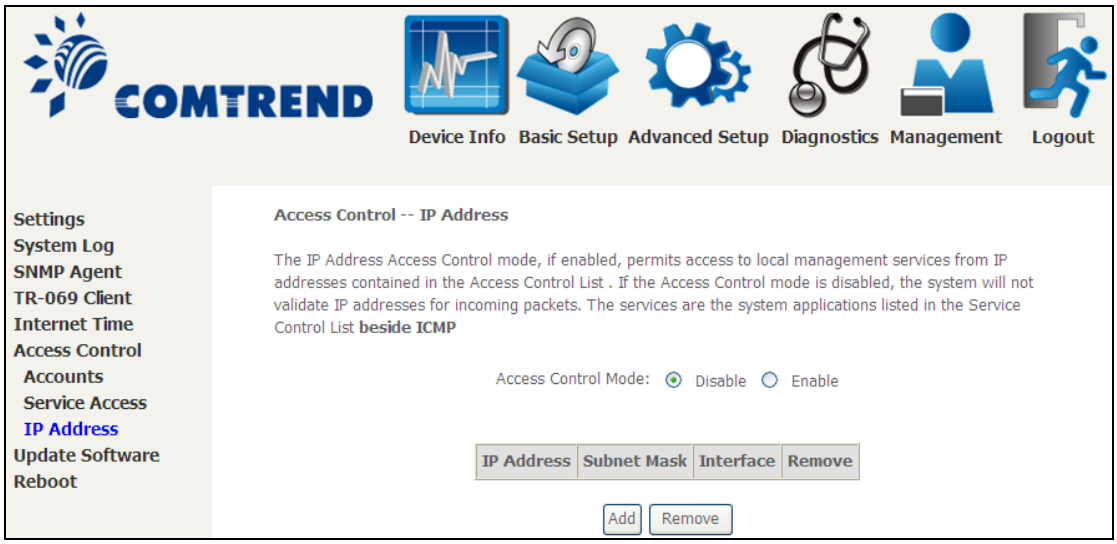

Click the **Add** button to display the following.

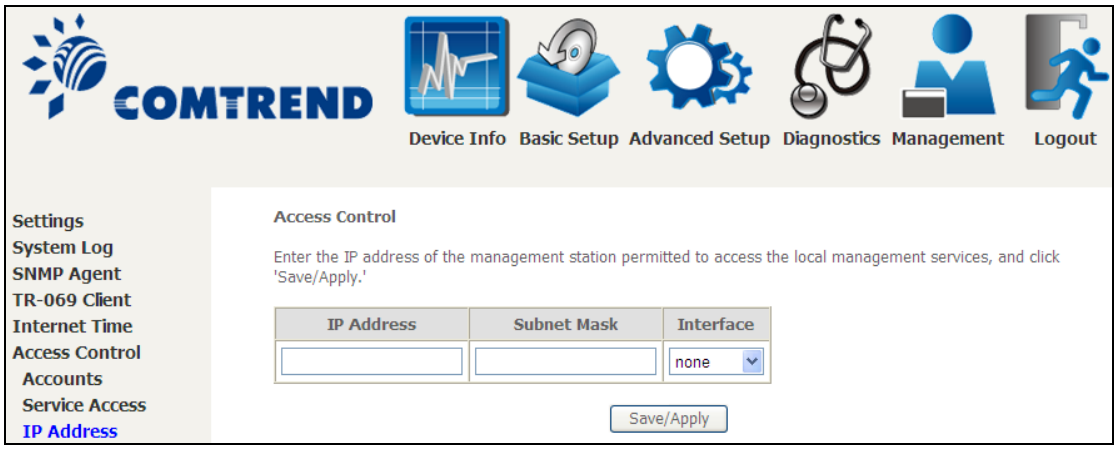

Configure the address and subnet of the management station permitted to access the local management services, and click **Save / Apply**.

IP Address – IP address of the management station.

Subnet Mask – Subnet address for the management station.

Interface – Access permission for the specified address, allowing the address to access the local management service from none/lan/wan/lan&wan interfaces.

8.7 Update Software

This option allows for firmware upgrades from a locally stored file.

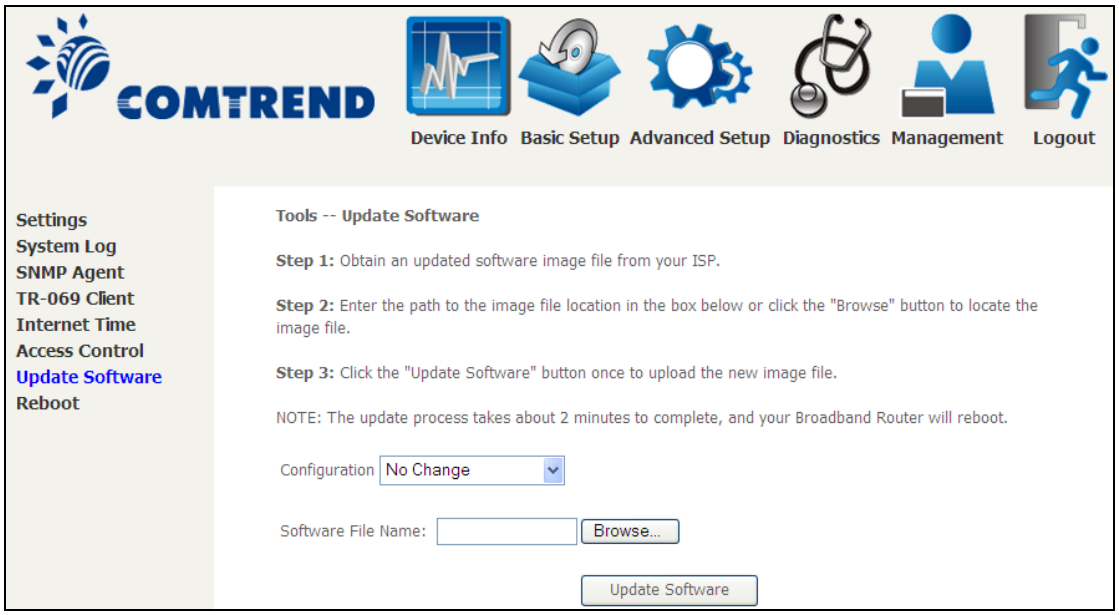

STEP 1: Obtain an updated software image file from your ISP.

STEP 2: Select the configuration from the drop-down menu.

Configuration options:

No change – upgrade software directly.

Erase current config – If the router has save_default configuration, this option will erase the current configuration and restore to save_default configuration after software upgrade.

Erase All – Router will be restored to factory default configuration after software upgrade.

STEP 3: Enter the path and filename of the firmware image file in the **Software File Name** field or click the Browse button to locate the image file.

STEP 4: Click the **Update Software** button once to upload and install the file.

NOTE:	The update process will take about 2 minutes to complete. The device will reboot and the browser window will refresh to the default screen upon successful installation. It is recommended that you compare the **Software Version** on the Device Information screen with the firmware version installed, to confirm the installation was successful.

8.8 Reboot

To save the current configuration and reboot the router, click **Save/Reboot**.

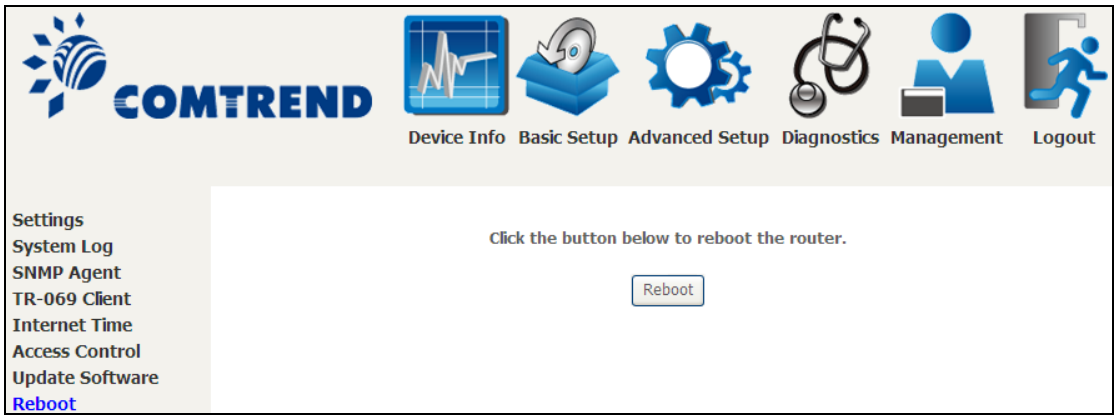

NOTE: You may need to close the browser window and wait for 2 minutes before reopening it. It may also be necessary, to reset your PC IP configuration.

Chapter 9 Logout

To log out from the device simply click the following icon located at the top of your screen.

When the following window pops up, click the **OK** button to exit the router.

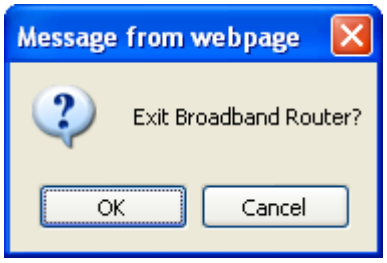

Upon successful exit, the following message will be displayed.

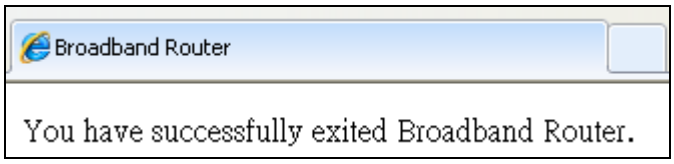

Appendix A - Firewall

STATEFUL PACKET INSPECTION
Refers to an architecture, where the firewall keeps track of packets on each connection traversing all its interfaces and makes sure they are valid. This is in contrast to static packet filtering which only examines a packet based on the information in the packet header.

DENIAL OF SERVICE ATTACK
Is an incident in which a user or organization is deprived of the services of a resource they would normally expect to have. Various DoS attacks the device can withstand are ARP Attack, Ping Attack, Ping of Death, Land, SYN Attack, Smurf Attack, and Tear Drop.

TCP/IP/PORT/INTERFACE FILTER
These rules help in the filtering of traffic at the Network layer (i.e. Layer 3). When a Routing interface is created, **Enable Firewall** must be checked. Navigate to Advanced Setup → Security → IP Filtering.

OUTGOING IP FILTER
Helps in setting rules to DROP packets from the LAN interface. By default, if the Firewall is Enabled, all IP traffic from the LAN is allowed. By setting up one or more filters, specific packet types coming from the LAN can be dropped.

Example 1:

Filter Name	: Out_Filter1
Protocol	: TCP
Source IP address	: 192.168.1.45
Source Subnet Mask	: 255.255.255.0
Source Port	: 80
Dest. IP Address	: NA
Dest. Subnet Mask	: NA
Dest. Port	: NA

This filter will Drop all TCP packets coming from the LAN with IP Address/Subnet Mask of 192.168.1.45/24 having a source port of 80 irrespective of the destination. All other packets will be Accepted.

Example 2:

Filter Name	: Out_Filter2
Protocol	: UDP
Source IP Address	: 192.168.1.45
Source Subnet Mask	: 255.255.255.0
Source Port	: 5060:6060
Dest. IP Address	: 172.16.13.4
Dest. Subnet Mask	: 255.255.255.0
Dest. Port	: 6060:7070

This filter will drop all UDP packets coming from the LAN with IP Address / Subnet Mask of 192.168.1.45/24 and a source port range of 5060 to 6060, destined to 172.16.13.4/24 and a destination port range of 6060 to 7070.

INCOMING IP FILTER
Helps in setting rules to Allow or Deny packets from the WAN interface. By default, all incoming IP traffic from the WAN is Blocked, if the Firewall is Enabled. By setting up one or more filters, specific packet types coming from the WAN can be Accepted.

Example 1:

Filter Name	: In_Filter1
Protocol	: TCP
Policy	: Allow
Source IP Address	: 210.168.219.45
Source Subnet Mask	: 255.255.0.0
Source Port	: 80
Dest. IP Address	: NA
Dest. Subnet Mask	: NA
Dest. Port	: NA
Selected WAN interface	: br0

This filter will ACCEPT all TCP packets coming from WAN interface "br0" with IP Address/Subnet Mask 210.168.219.45/16 with a source port of 80, irrespective of the destination. All other incoming packets on this interface are DROPPED.

Example 2:

Filter Name	: In_Filter2
Protocol	: UDP
Policy	: Allow
Source IP Address	: 210.168.219.45
Source Subnet Mask	: 255.255.0.0
Source Port	: 5060:6060
Dest. IP Address	: 192.168.1.45
Dest. Sub. Mask	: 255.255.255.0
Dest. Port	: 6060:7070
Selected WAN interface	: br0

This rule will ACCEPT all UDP packets coming from WAN interface "br0" with IP Address/Subnet Mask 210.168.219.45/16 and a source port in the range of 5060 to 6060, destined to 192.168.1.45/24 and a destination port in the range of 6060 to 7070. All other incoming packets on this interface are DROPPED.

MAC LAYER FILTER

These rules help in the filtering of Layer 2 traffic. MAC Filtering is only effective in Bridge mode. After a Bridge mode connection is created, navigate to Advanced Setup → Security → MAC Filtering in the WUI.

Example 1:

Global Policy	: Forwarded
Protocol Type	: PPPoE
Dest. MAC Address	: 00:12:34:56:78:90
Source MAC Address	: NA
Src. Interface	: eth1
Dest. Interface	: eth2

Addition of this rule drops all PPPoE frames going from eth1 to eth2 with a Destination MAC Address of 00:12:34:56:78:90 irrespective of its Source MAC Address. All other frames on this interface are forwarded.

Example 2:

Global Policy	: Blocked
Protocol Type	: PPPoE
Dest. MAC Address	: 00:12:34:56:78:90
Source MAC Address	: 00:34:12:78:90:56
Src. Interface	: eth1
Dest. Interface	: eth2

Addition of this rule forwards all PPPoE frames going from eth1 to eth2 with a Destination MAC Address of 00:12:34:56:78 and Source MAC Address of 00:34:12:78:90:56. All other frames on this interface are dropped.

DAYTIME PARENTAL CONTROL

This feature restricts access of a selected LAN device to an outside Network through the VR-3030, as per chosen days of the week and the chosen times.

Example:

User Name	: FilterJohn
Browser's MAC Address	: 00:25:46:78:63:21
Days of the Week	: Mon, Wed, Fri
Start Blocking Time	: 14:00
End Blocking Time	: 18:00

With this rule, a LAN device with MAC Address of 00:25:46:78:63:21 will have no access to the WAN on Mondays, Wednesdays, and Fridays, from 2pm to 6pm. On all other days and times, this device will have access to the outside Network.

Appendix B - Pin Assignments

ETHERNET Ports (RJ45)

Pin	Definition	Pin	Definition
1	Transmit data+	5	NC
2	Transmit data-	6	Receive data-
3	Receive data+	7	NC
4	NC	8	NC

Appendix C - Specifications

Hardware Interface

RJ-11 X 1 for ADSL2+/VDSL2, RJ-45 X 1 for LAN (10/100 Base-T), Reset Button X 1, Power Switch X 1,

WAN Interface

ADSL2+ .....Downstream : 24 Mbps Upstream : 1.3 Mbps
ITU-T G.992.5, ITU-T G.992.3, ITU-T G.992.1, ANSI T1.413 Issue 2, AnnexM

VDSL2 .....Downstream : 100 Mbps Upstream : 60 Mbps
ITU-T G.993.2 (supporting profile 8a, 8b, 8c, 8d, 12a, 12b, 17a)

LAN Interface

Standard.....IEEE 802.3, IEEE 802.3u
10/100 BaseT .....Auto-sense
MDI/MDX support.....Yes

ATM Attributes

RFC 2684 (RFC 1483) Bridge/Route; RFC 2516 (PPPoE);
RFC 2364 (PPPoA); RFC 1577 (IPoA)

PVCs 16
AAL type AAL5
ATM service class .....UBR/CBR/VBR
ATM UNI support.....UNI 3.1/4.0
OAM F4/F5 .....Yes

PTM Attributes

ATM Adaptation Layer: Ethernet packet format,
Support 8 flows,
Support preemption and dual latency,
Support PTM shaping

Management

Compliant with TR-069/TR-098/TR-104/TR-111 remote management protocols, Telnet, Web-based management, Configuration backup and restoration, Software upgrade via HTTP / TFTP / FTP server

Bridge Functions

Transparent bridging and learning .....IEEE 802.1d
VLAN support .....Yes
Spanning Tree Algorithm .....Yes
IGMP Proxy .....Yes

Routing Functions

Static route, RIP v1/v2, NAT/PAT, DMZ, DHCP Server/Relay, DNS Proxy, ARP,

Security Functions

Authentication protocols : PAP, CHAP
TCP/IP/Port filtering rules, Port Triggering/Forwarding, Packet and MAC address filtering, Access Control, DoS Protection, SSH

QoS ..... L3 policy-based QoS, IP QoS, ToS

Application Passthrough

PPTP, L2TP, IPSec, VoIP, Yahoo messenger, ICQ, RealPlayer, NetMeeting, MSN, X-box

Power Supply .....Input: 100 - 240 Vac
Output: 12 Vdc / 1.0 A

Environment Condition

Operating temperature .....0 ~ 40 degrees Celsius
Relative humidity .....5 ~ 95% (non-condensing)

Dimensions .....171 mm (W) x 37 mm (H) x 121 mm (D)

Kit Weight

(1*VR-3030, 1*RJ11 cable, 1*RJ45 cable, 1*power adapter) = 0.6 kg

NOTE: Specifications are subject to change without notice

Appendix D - SSH Client

Unlike Microsoft Windows, Linux OS has a ssh client included. For Windows users, there is a public domain one called "putty" that can be downloaded from here:

http://www.chiark.greenend.org.uk/~sgtatham/putty/download.html

To access the ssh client you must first enable SSH access for the LAN or WAN from the Management → Access Control → Services menu in the web user interface.

To access the router using the Linux ssh client

For LAN access, type: ssh -l root 192.168.1.1

For WAN access, type: ssh -l support *WAN IP address*

To access the router using the Windows "putty" ssh client

For LAN access, type: putty -ssh -l root 192.168.1.1

For WAN access, type: putty -ssh -l support *WAN IP address*

NOTE: The *WAN IP address* can be found on the Device Info → WAN screen

Appendix E- Connection Setup

Creating a WAN connection is a two-stage process.

1 - Setup a Layer 2 Interface (ATM, PTM or Ethernet).
2 - Add a WAN connection to the Layer 2 Interface.

The following sections describe each stage in turn.

E1 ~ Layer 2 Interfaces

Every layer2 interface operates in Multi-Service Connection (VLAN MUX) mode, which supports multiple connections over a single interface. Note that PPPoA and IPoA connection types are not supported for Ethernet WAN interfaces. After adding WAN connections to an interface, you must also create an Interface Group to connect LAN/WAN interfaces.

E1.1 ATM Interfaces

Follow these procedures to configure an ATM interface.

NOTE:	The VR-3030 supports up to 16 ATM interfaces.

STEP 1: Go to Basic Setup

→ WAN Setup → Select ATM Interface from the drop-down menu.

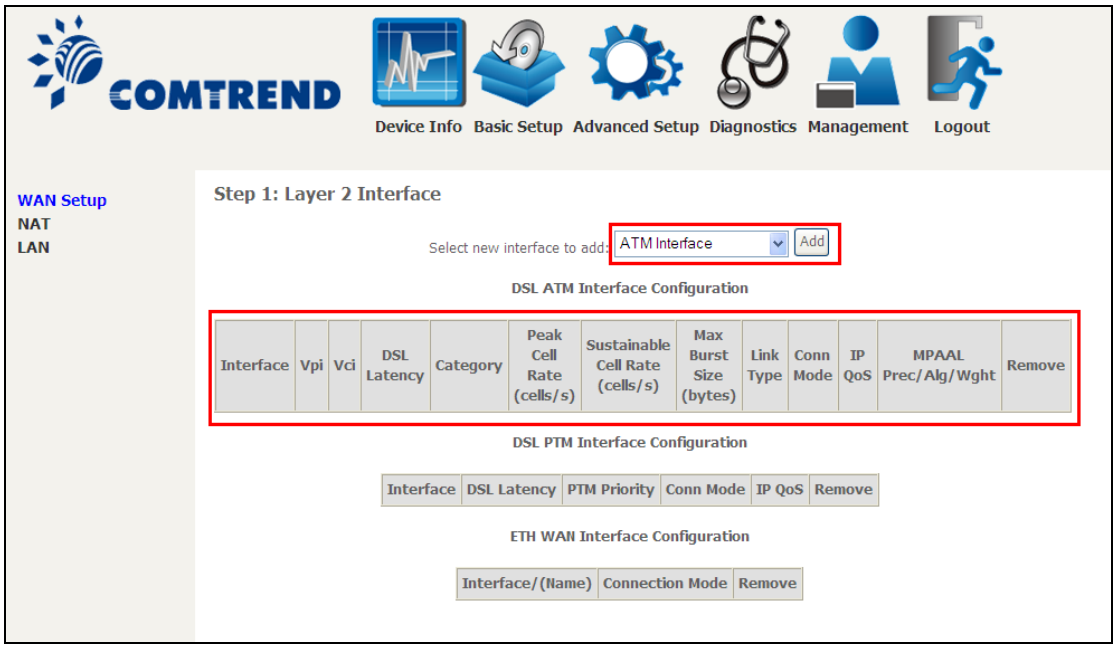

This table is provided here for ease of reference.

Heading	Description
Interface	WAN interface name.
VPI	ATM VPI (0-255)
VCI	ATM VCI (32-65535)
DSL Latency	{Path0} → portID = 0 {Path1} → port ID = 1 {Path0&1} → port ID = 4
Category	ATM service category
Peak Cell Rate	Maximum allowed traffic rate for the ATM PCR service connection
Sustainable Cell Rate	The average allowable, long-term cell transfer rate on the VBR service connection
Max Burst Size	The maximum allowable burst size of cells that can be transmitted contiguously on the VBR service connection
Link Type	Choose EoA (for PPPoE, IPoE, and Bridge), PPPoA, or IPoA.
Connection Mode	Default Mode – Single service over one connection Vlan Mux Mode – Multiple Vlan service over one connection
IP QoS	Quality of Service (QoS) status
MPAAL	QoS Scheduler algorithm and queue weight defined for the connection
Remove	Select items for removal

STEP 2: Click **Add** to proceed to the next screen.

NOTE:	To add WAN connections to one interface type, you must delete existing connections from the other interface type using the **remove** button.

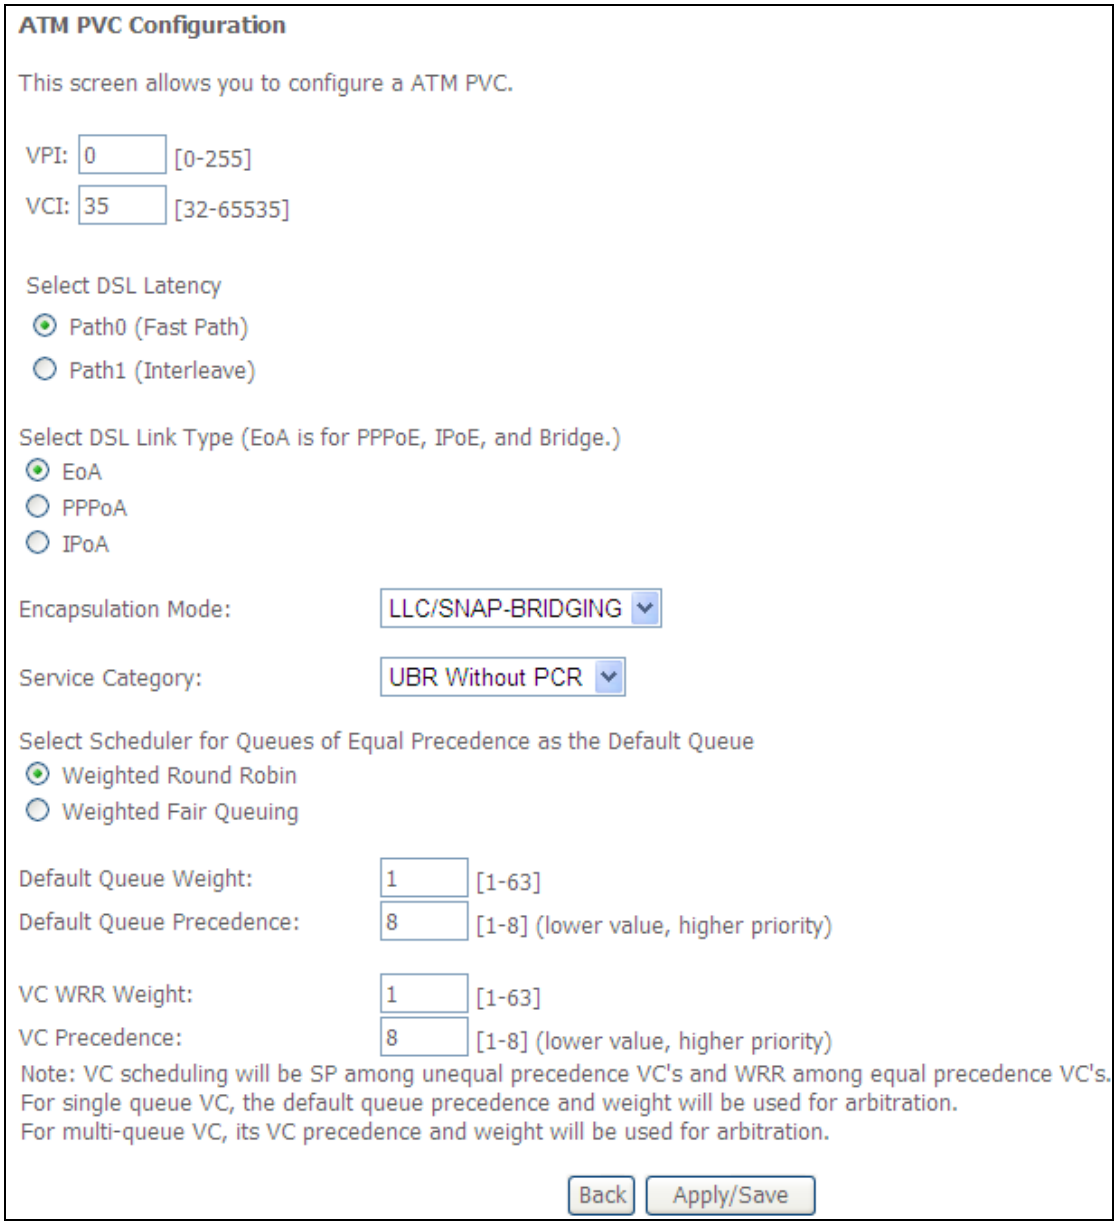

There are many settings here including: VPI/VCI, DSL Latency, DSL Link Type, Encapsulation Mode, Service Category, Connection Mode and Quality of Service.

Here are the available encapsulations for each xDSL Link Type:

- EoA- LLC/SNAP-BRIDGING, VC/MUX
- PPPoA- VC/MUX, LLC/ENCAPSULATION
- IPoA- LLC/SNAP-ROUTING, VC MUX

STEP 3: Click **Apply/Save** to confirm your choices.

On the next screen, check that the ATM interface is added to the list. For example, an ATM interface on PVC 0/35 in Default Mode with an EoA Link type is shown below.

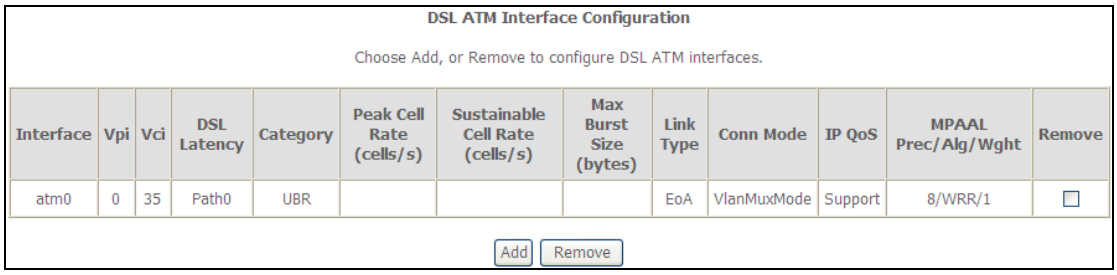

To add a WAN connection go to E2 ~ WAN Connections WAN Connections.

E1.2 PTM Interfaces

Follow these procedures to configure a PTM interface.

NOTE: The VR-3030 supports up to four PTM interfaces.

STEP 4: Go to Basic Setup

→ WAN Setup → Select PTM Interface from the drop-down menu.

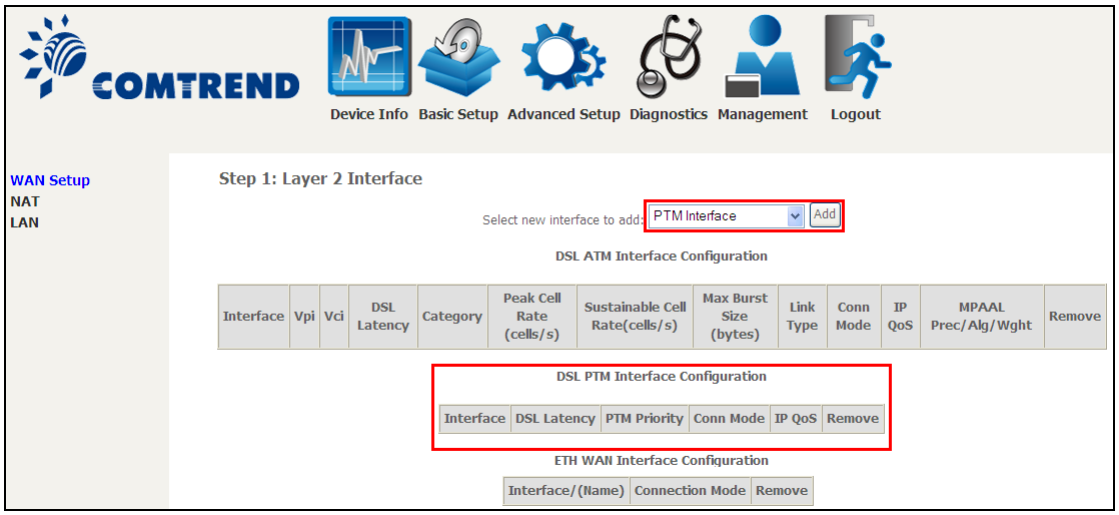

This table is provided here for ease of reference.

Heading	Description
Interface	WAN interface name.
DSL Latency	{Path0} → portID = 0 {Path1} → port ID = 1 {Path0&1} → port ID = 4
PTM Priority	Normal or High Priority (Preemption).
Connection Mode	Default Mode – Single service over one interface. Vlan Mux Mode – Multiple Vlan services over one interface.

Heading	Description
IP QoS	Quality of Service (QoS) status.
Remove	Select interfaces to remove.

STEP 5: Click **Add** to proceed to the next screen.

NOTE: To add WAN connections to one interface type, you must delete existing connections from the other interface type using the **remove** button.

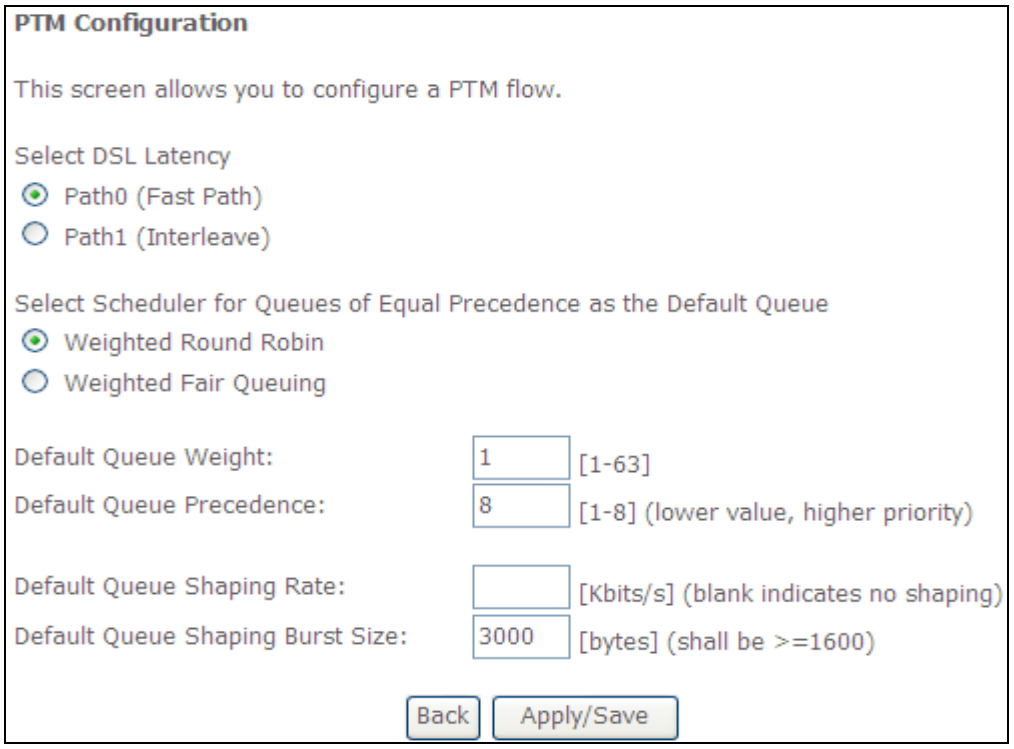

There are many settings that can be configured here including:
DSL Latency, PTM Priority, Connection Mode and Quality of Service.

STEP 6: Click **Apply/Save** to confirm your choices.

On the next screen, check that the PTM interface is added to the list.

For example, an PTM interface in Default Mode is shown below.

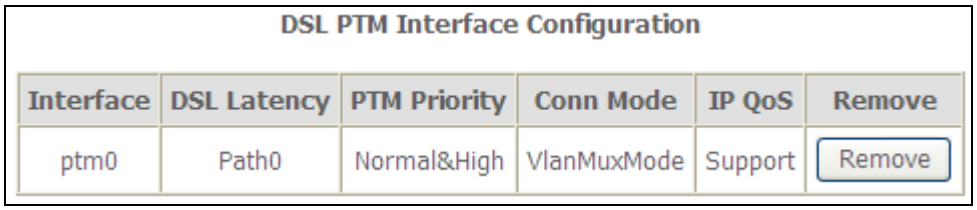

To add a WAN connection go to E2 ~ WAN Connections.

E2 ~ WAN Connections

The VR-3030 supports one WAN connection for each interface, up to a maximum of 16 connections.

To setup a WAN connection follow these instructions.

STEP 1: Go to Basic Setup

→ WAN Setup.

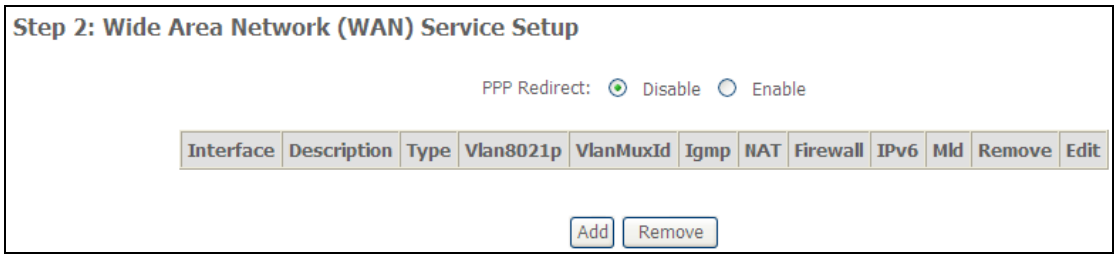

STEP 2: Click **Add** to create a WAN connection. The following screen will display.

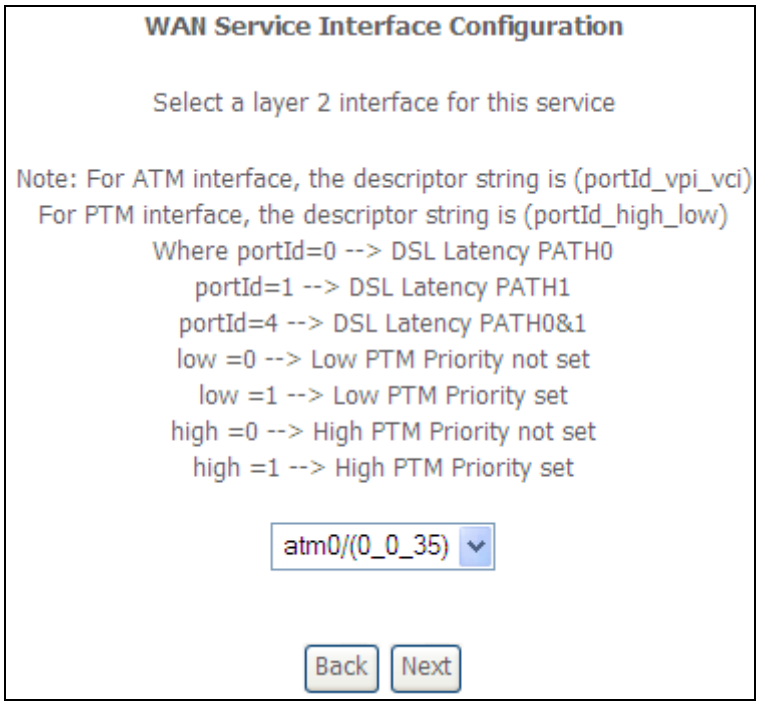

STEP 3: Choose a layer 2 interface from the drop-down box and click **Next**. The WAN Service Configuration screen will display as shown below.

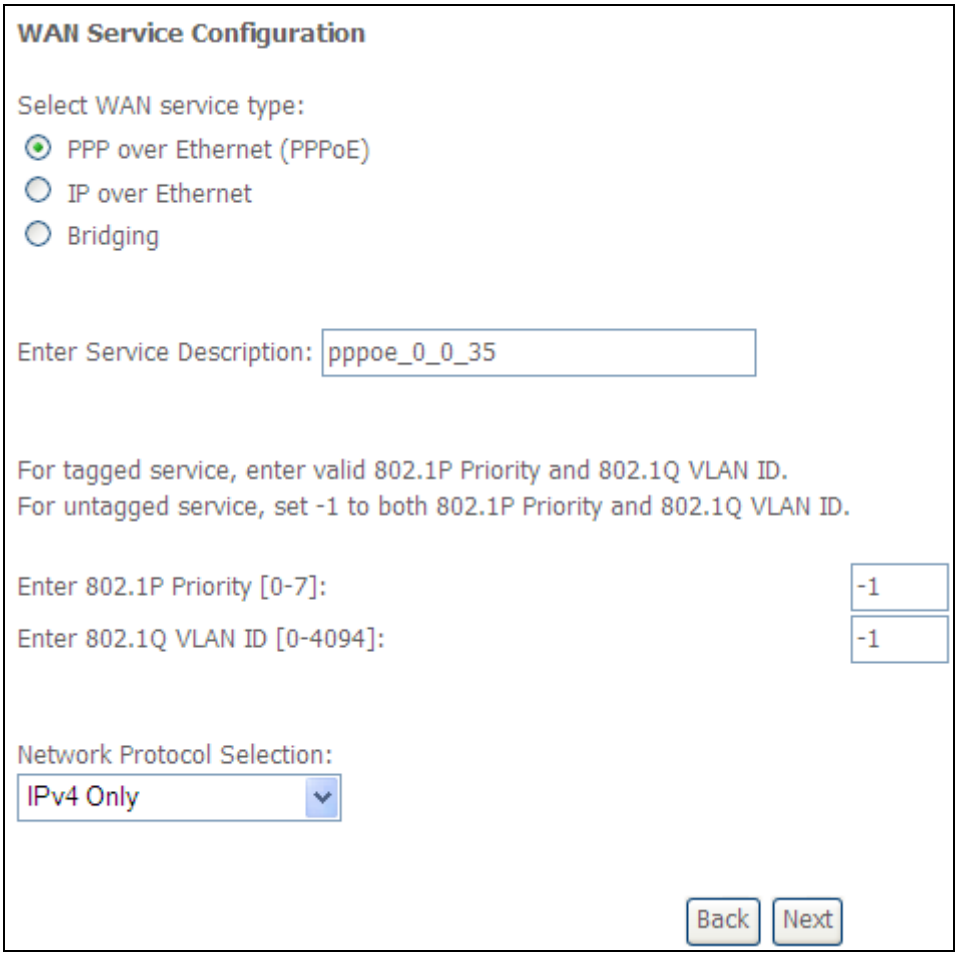

NOTE:	The WAN services shown here are those supported by the layer 2 interface you selected in the previous step. If you wish to change your selection click the **Back** button and select a different layer 2 interface.

STEP 4: For VLAN Mux Connections only, you must enter Priority & VLAN ID tags.

STEP 5: You will now follow the instructions specific to the WAN service type you wish to establish. This list should help you locate the correct procedure:

(1) For PPP over ETHERNET (PPPoE), go to page 126.
(2) For IP over ETHERNET (IPoE), go to page 132.
(3) For Bridging, go to page 137.
(4) For PPP over ATM (PPPoA), go to page 139.
(5) For IP over ATM (IPoA), go to page 144.

The subsections that follow continue the WAN service setup procedure.

E2.1 PPP over ETHERNET (PPPoE)

STEP 1: Select the PPP over Ethernet radio button and click **Next**. You can also enable IPv6 by ticking the checkbox ☑ at the bottom of this screen.

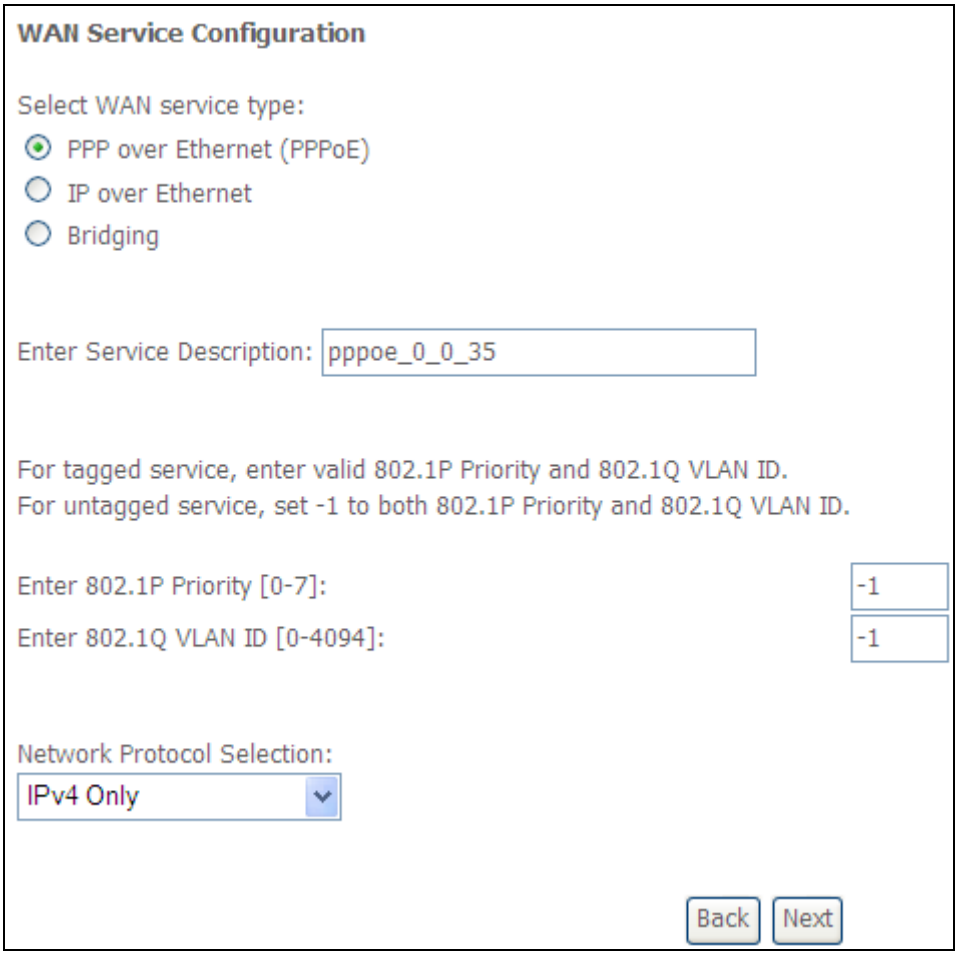

STEP 2: On the next screen, enter the PPP settings as provided by your ISP. Click **Next** to continue or click **Back** to return to the previous step.

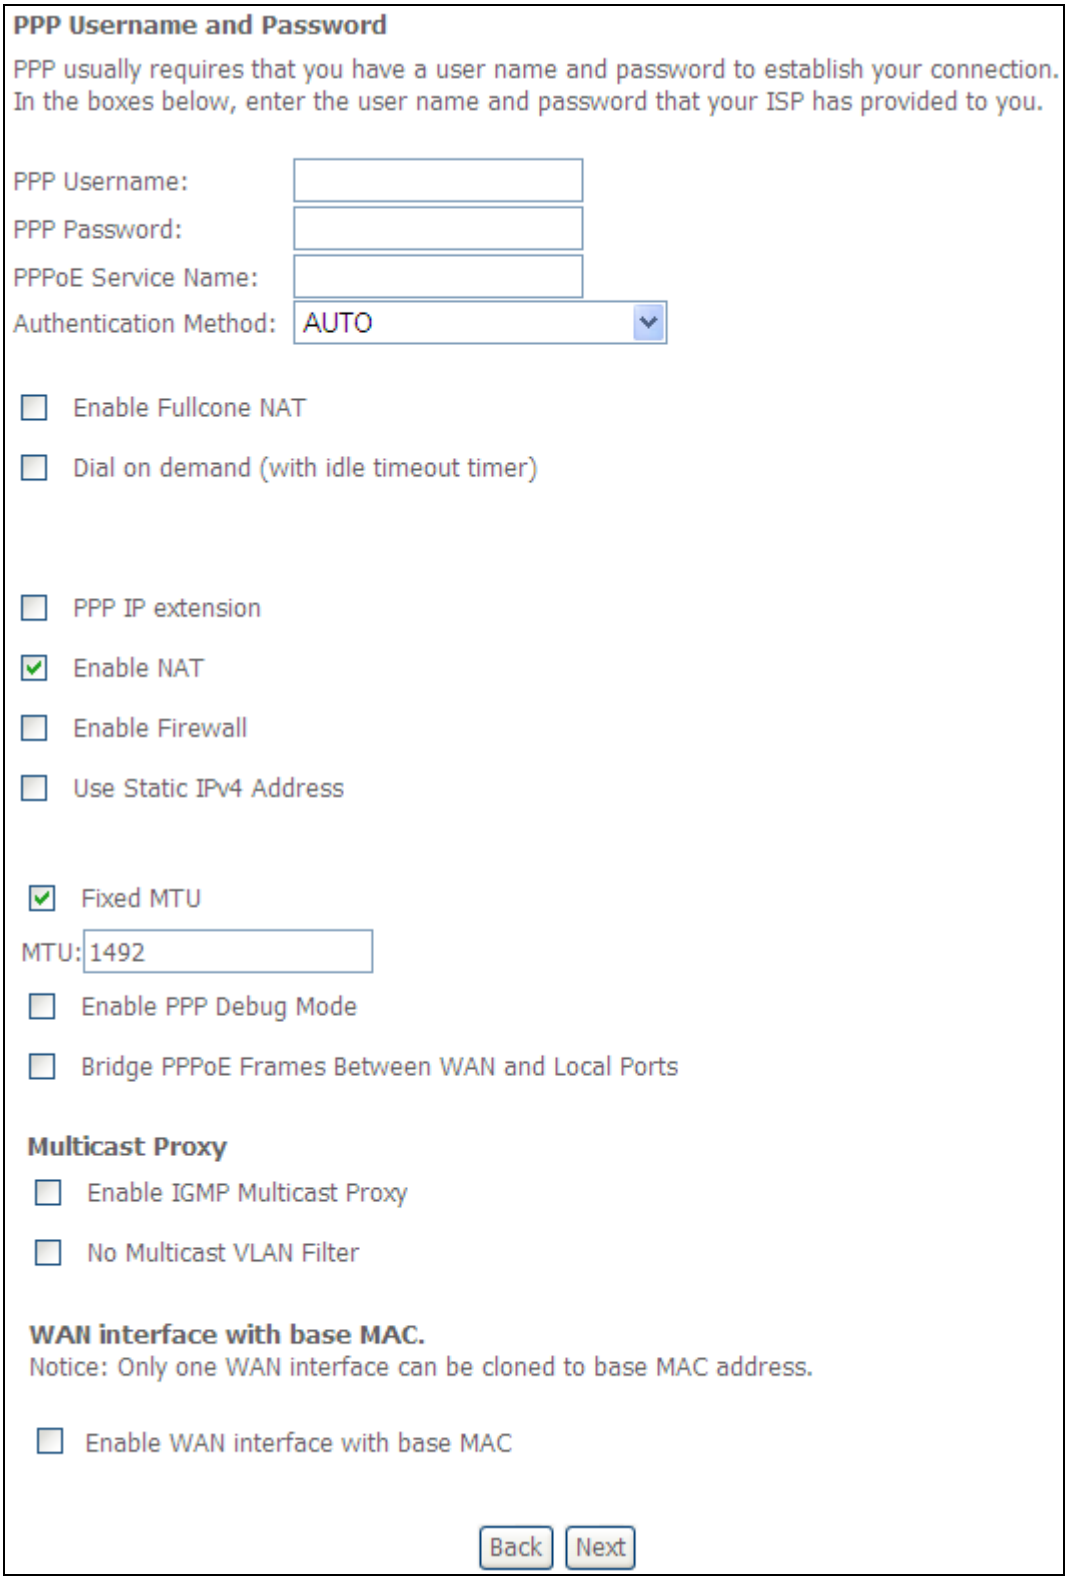

The settings shown above are described below.

PPP SETTINGS

The PPP Username, PPP password and the PPPoE Service Name entries are dependent on the particular requirements of the ISP. The user name can be a maximum of 256 characters and the password a maximum of 32 characters in length. For Authentication Method, choose from AUTO, PAP, CHAP, and MSCHAP.

ENABLE FULLCONE NAT
This option becomes available when NAT is enabled. Known as one-to-one NAT, all requests from the same internal IP address and port are mapped to the same external IP address and port. An external host can send a packet to the internal host, by sending a packet to the mapped external address.

DIAL ON DEMAND
The VR-3030 can be configured to disconnect if there is no activity for a period of time by selecting the **Dial on demand** checkbox ☑. You must also enter an inactivity timeout period in the range of 1 to 4320 minutes.

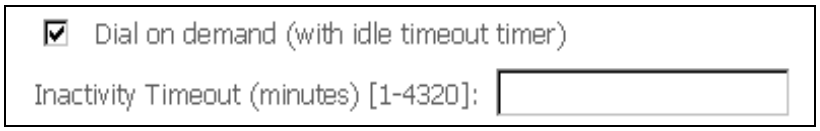

PPP IP EXTENSION
The PPP IP Extension is a special feature deployed by some service providers. Unless your service provider specifically requires this setup, do not select it.

PPP IP Extension does the following:

- Allows only one PC on the LAN.
- Disables NAT and Firewall.
- The device becomes the default gateway and DNS server to the PC through DHCP using the LAN interface IP address.
- The device extends the IP subnet at the remote service provider to the LAN PC. i.e. the PC becomes a host belonging to the same IP subnet.
- The device bridges the IP packets between WAN and LAN ports, unless the packet is addressed to the device's LAN IP address.
- The public IP address assigned by the remote side using the PPP/IPCP protocol is actually not used on the WAN PPP interface. Instead, it is forwarded to the PC LAN interface through DHCP. Only one PC on the LAN can be connected to the remote, since the DHCP server within the device has only a single IP address to assign to a LAN device.

ENABLE NAT
If the LAN is configured with a private IP address, the user should select this checkbox ☑. The NAT submenu will appear in the Advanced Setup menu after reboot. On the other hand, if a private IP address is not used on the LAN side (i.e. the LAN side is using a public IP), this checkbox ☑ should not be selected to free up system resources for better performance.

ENABLE FIREWALL
If this checkbox ☑ is selected, the Security submenu will be displayed on the Advanced Setup menu after reboot. If firewall is not necessary, this checkbox ☑ should not be selected to free up system resources for better performance.

USE STATIC IPv4 ADDRESS
Unless your service provider specially requires it, do not select this checkbox ☑. If selected, enter the static IP address in the **IPv4 Address** field.
Don't forget to adjust the IP configuration to Static IP Mode as described in section 3.2.

FIXED MTU
Maximum Transmission Unit. The size (in bytes) of largest protocol data unit which the layer can pass onwards. This value is 1500 for PPPoA.

ENABLE PPP DEBUG MODE
When this option is selected, the system will put more PPP connection information into the system log. This is for debugging errors and not for normal usage.

BRIDGE PPPOE FRAMES BETWEEN WAN AND LOCAL PORTS
(This option is hidden when PPP IP Extension is enabled)
When Enabled, this creates local PPPoE connections to the WAN side. Enable this option only if all LAN-side devices are running PPPoE clients, otherwise disable it. The VR-3025u supports pass-through PPPoE sessions from the LAN side while simultaneously running a PPPoE client from non-PPPoE LAN devices.

ENABLE IGMP MULTICAST PROXY
Tick the checkbox ☑ to enable Internet Group Membership Protocol (IGMP) multicast. This protocol is used by IPv4 hosts to report their multicast group memberships to any neighboring multicast routers.

NO MULTICAST VLAN FILTER
Tick the checkbox ☑ to Enable/Disable multicast VLAN filter.

Enable WAN interface with base MAC
Enable this option to use the router's base MAC address as the MAC address for this WAN interface.

STEP 3: Choose an interface to be the default gateway.

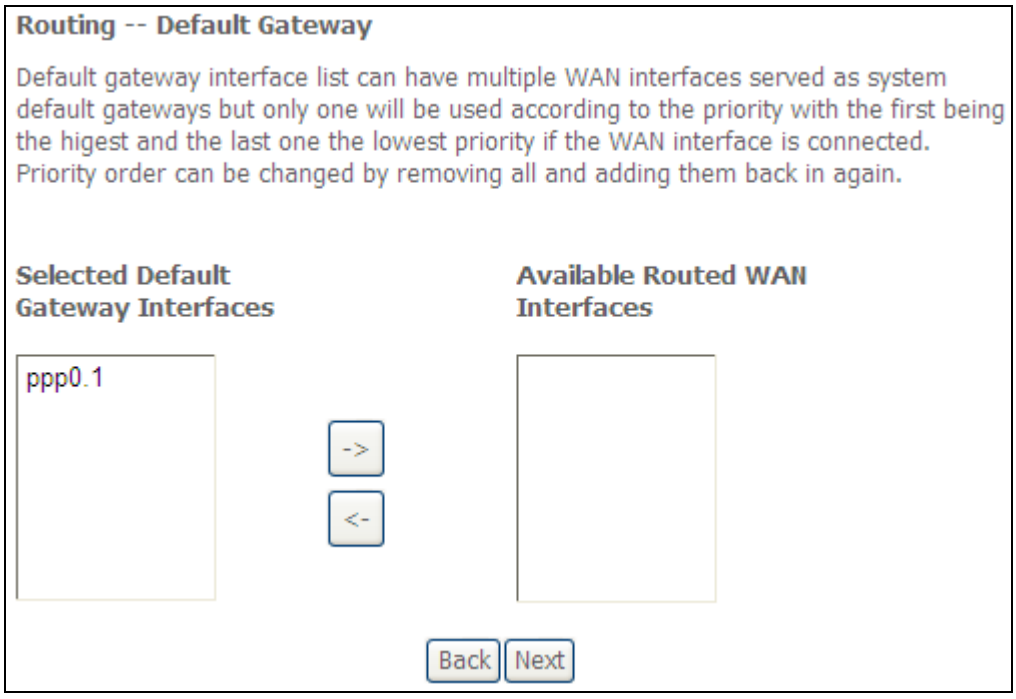

Click **Next** to continue or click **Back** to return to the previous step.

Select DNS Server Interface from available WAN interfaces OR enter static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered.

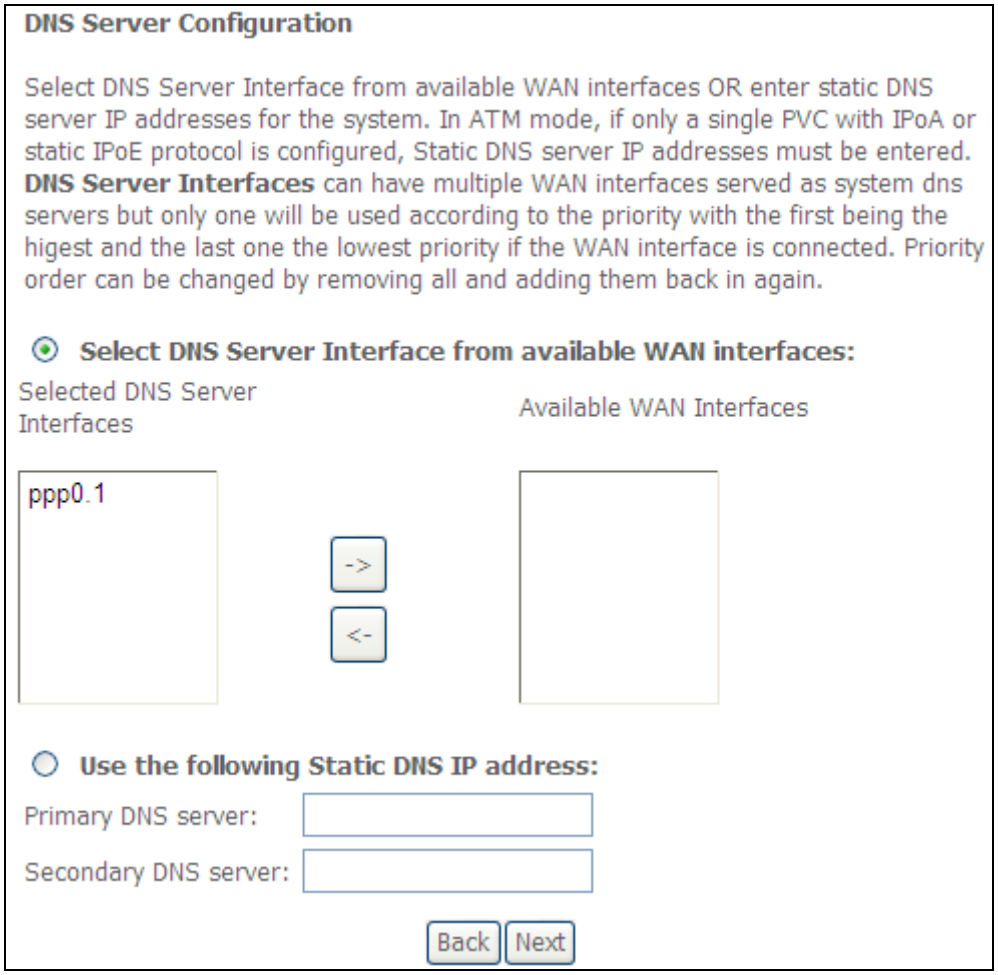

Click **Next** to continue or click **Back** to return to the previous step.

STEP 5: The WAN Setup - Summary screen shows a preview of the WAN service you have configured. Check these settings and click **Apply / Save** if they are correct, or click **Back** to modify them.

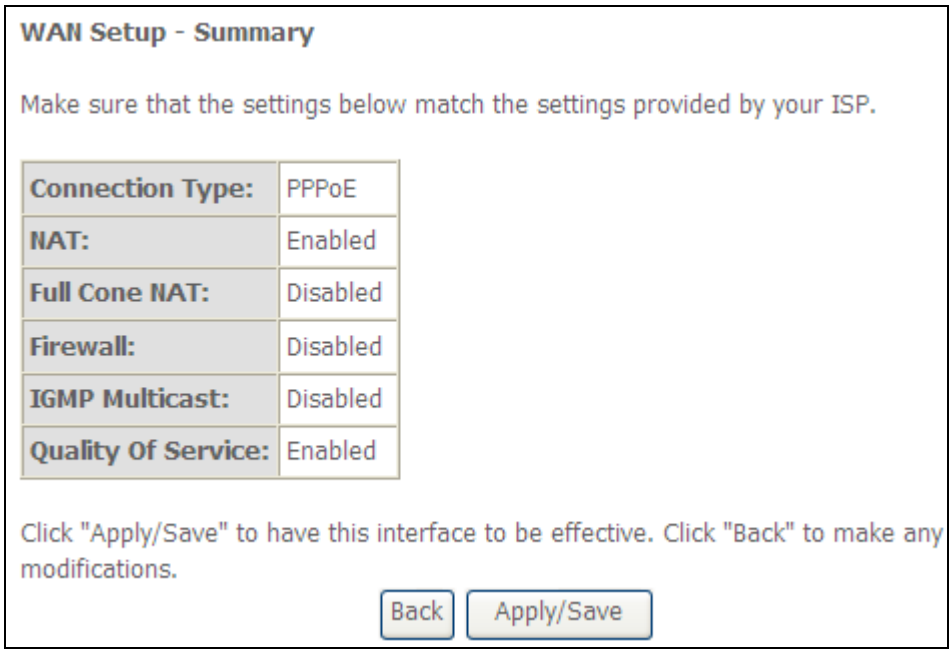

After clicking **Apply / Save**, the new service should appear on the main screen. To activate it you must reboot. Go to Management → Reboot and click **Reboot**.

E2.2 IP over ETHERNET (IPoE)

STEP 1: ***Select the IP over Ethernet radio button and click **Next.**

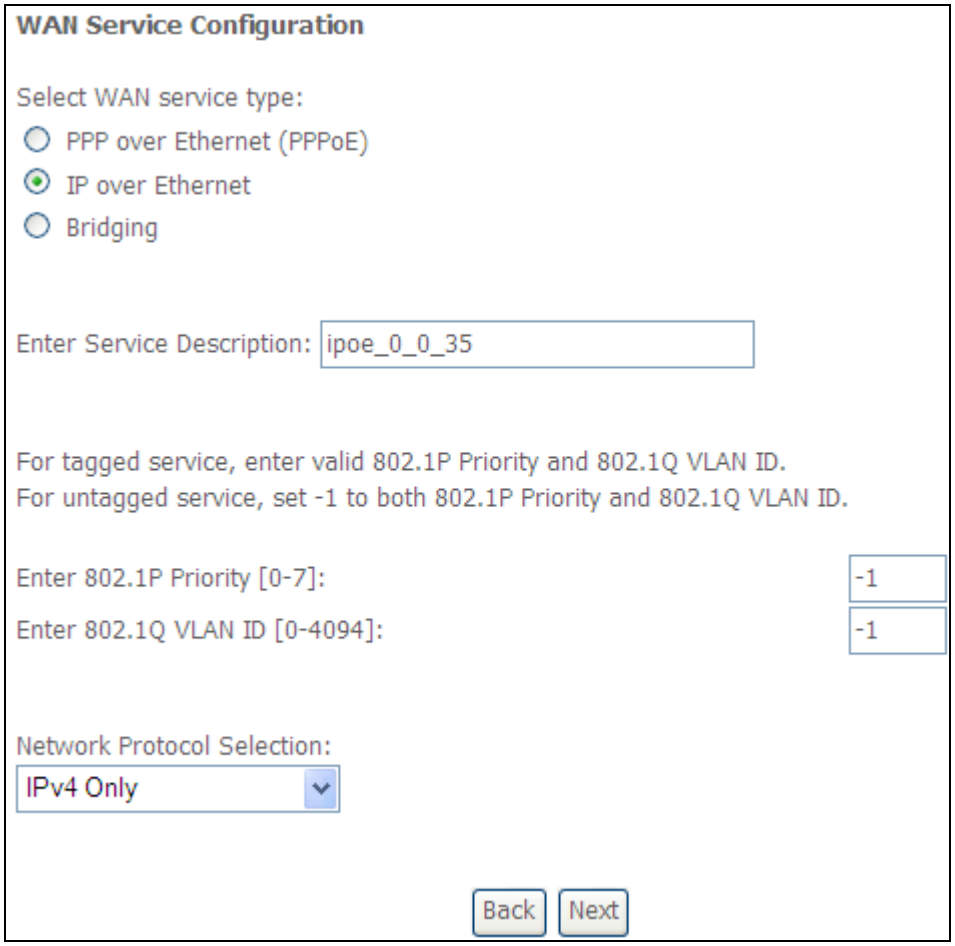

*

For tagged service, enter valid 802.1P Priority and 802.1Q VLAN ID.

For untagged service, set -1 to both 802.1P Priority and 802.1Q VLAN ID.

STEP 2: The WAN IP settings screen provides access to the DHCP server settings. You can select the **Obtain an IP address automatically** radio button to enable DHCP (use the DHCP Options only if necessary). However, if you prefer, you can instead use the **Static IP address** method to assign WAN IP address, Subnet Mask and Default Gateway manually.

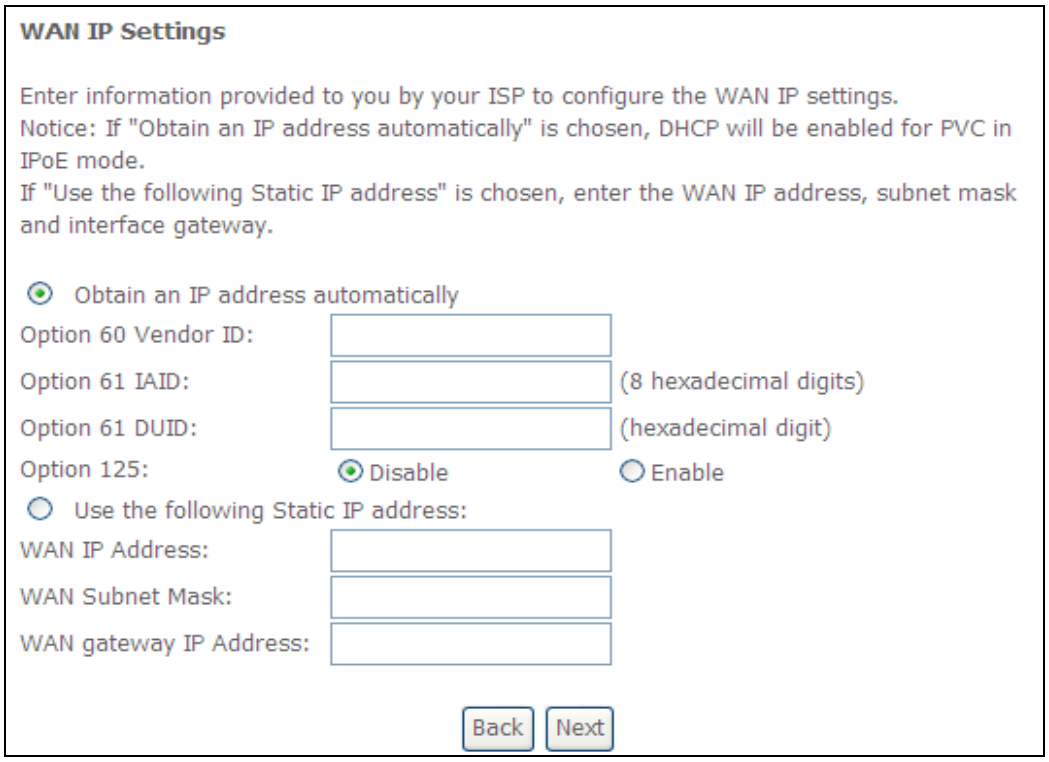

NOTE: If IPv6 networking is enabled, an additional set of instructions, radio buttons, and text entry boxes will appear at the bottom of the screen. These configuration options are quite similar to those for IPv4 networks.

Click **Next** to continue or click **Back** to return to the previous step.

STEP 3: This screen provides access to NAT, Firewall and IGMP Multicast settings. Enable each by selecting the appropriate checkbox ☑. Click **Next** to continue or click **Back** to return to the previous step.

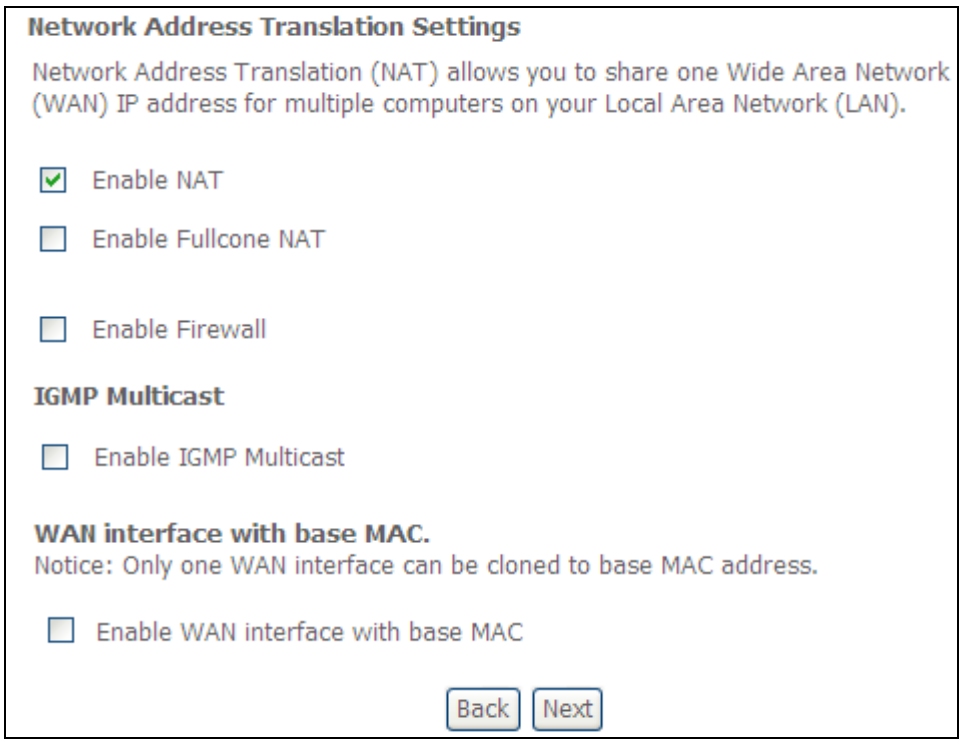

ENABLE NAT
If the LAN is configured with a private IP address, the user should select this checkbox ☑. The NAT submenu will appear in the Advanced Setup menu after reboot. On the other hand, if a private IP address is not used on the LAN side (i.e. the LAN side is using a public IP), this checkbox ☑ should not be selected, so as to free up system resources for improved performance.

ENABLE FULLCONE NAT
This option becomes available when NAT is enabled. Known as one-to-one NAT, all requests from the same internal IP address and port are mapped to the same external IP address and port. An external host can send a packet to the internal host, by sending a packet to the mapped external address.

ENABLE FIREWALL
If this checkbox ☑ is selected, the Security submenu will be displayed on the Advanced Setup menu after reboot. If firewall is not necessary, this checkbox ☑ should not be selected so as to free up system resources for better performance.

ENABLE IGMP MULTICAST
Tick the checkbox ☑ to enable Internet Group Membership Protocol (IGMP) multicast. IGMP is a protocol used by IPv4 hosts to report their multicast group memberships to any neighboring multicast routers.

Enable WAN interface with base MAC
Enable this option to use the router's base MAC address as the MAC address for this WAN interface.

STEP 4: To choose an interface to be the default gateway.

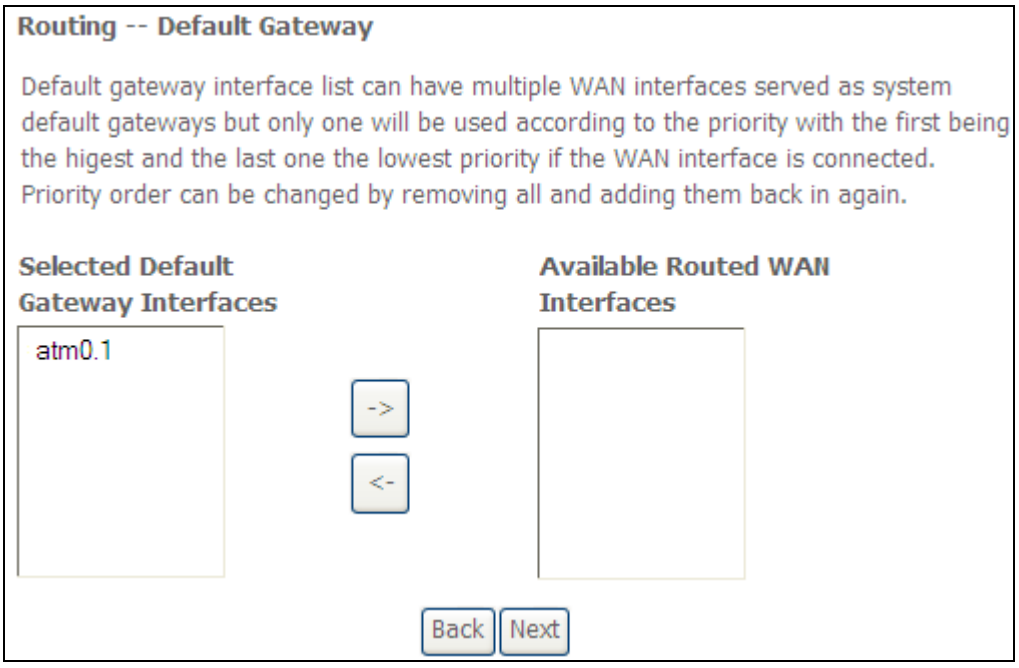

Click **Next** to continue or click **Back** to return to the previous step.

STEP 5: Select DNS Server Interface from available WAN interfaces OR enter static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered.

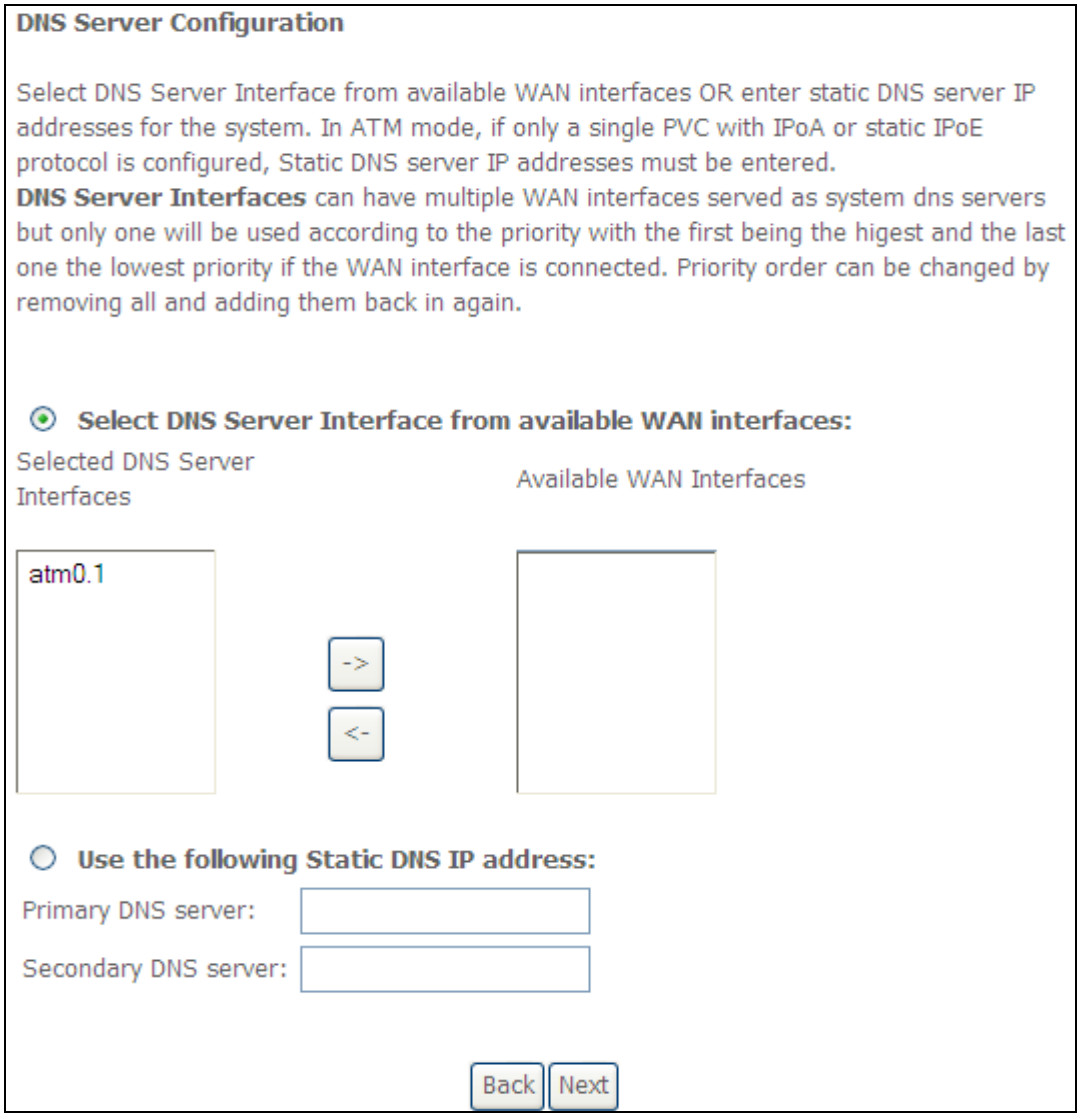

If IPv6 is enabled, an additional set of options will be shown.

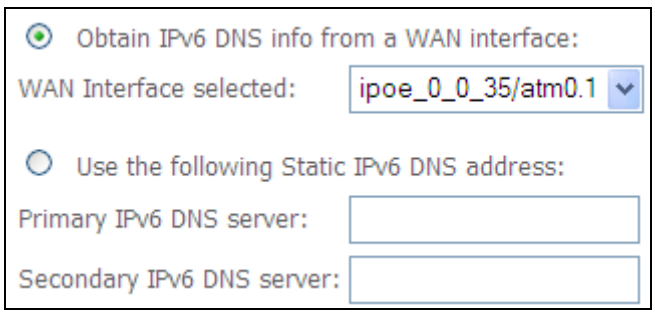

IPv6: Select the configured WAN interface for IPv6 DNS server information OR enter the static IPv6 DNS server Addresses.
Note that selecting a WAN interface for IPv6 DNS server will enable DHCPv6 Client on that interface.

Click **Next** to continue or click **Back** to return to the previous step.

STEP 6: The WAN Setup - Summary screen shows a preview of the WAN service you have configured. Check these settings and click **Apply / Save** if they are correct, or click **Back** to modify them.

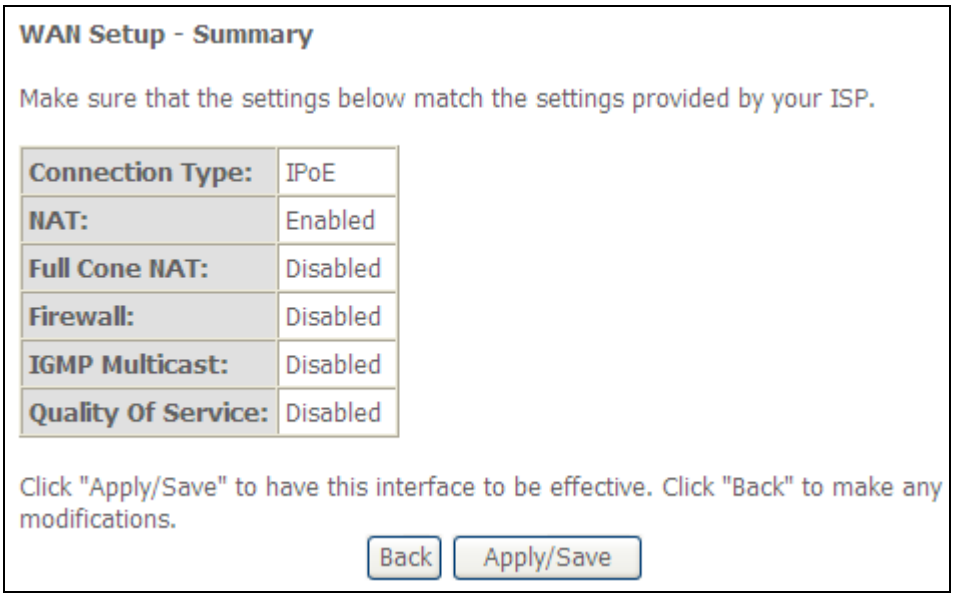

After clicking **Apply / Save**, the new service should appear on the main screen. To activate it you must reboot. Go to Management → Reboot and click **Reboot**.

E2.3 Bridging

NOTE:	This connection type is not available on the Ethernet WAN interface.

STEP 1: ***Select the Bridging radio button and click **Next**.

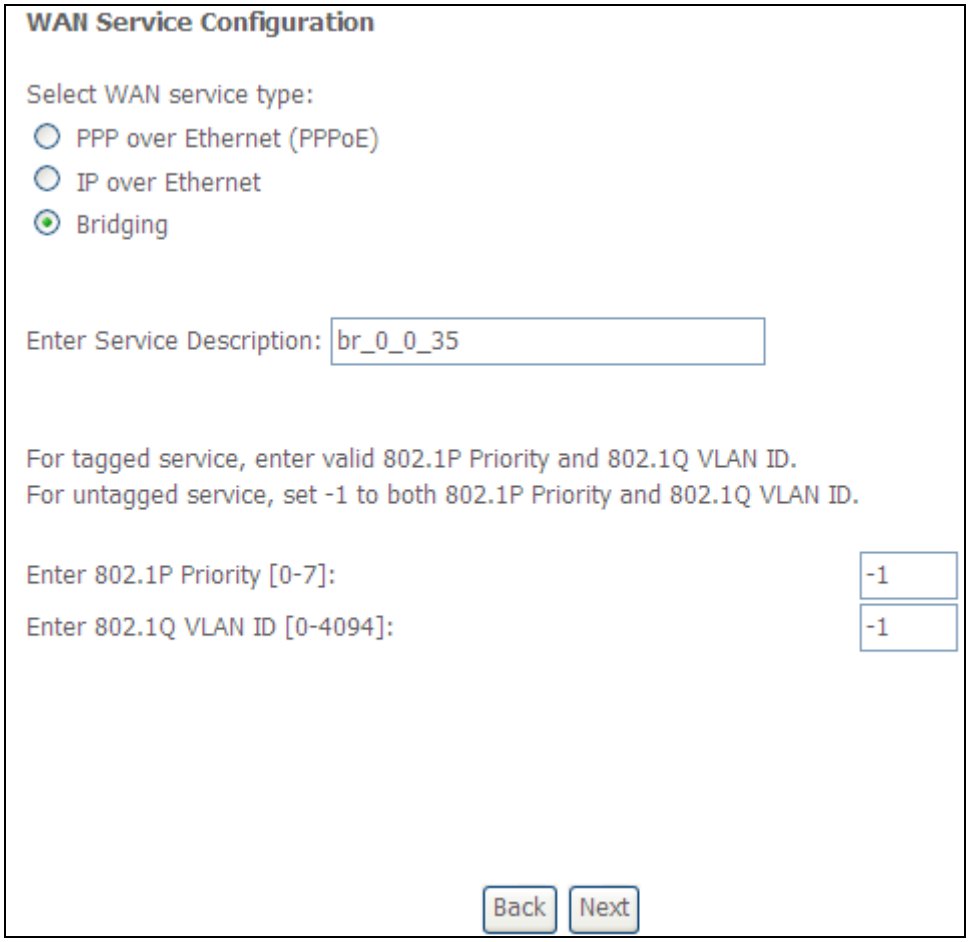

*

For tagged service, enter valid 802.1P Priority and 802.1Q VLAN ID.

For untagged service, set -1 to both 802.1P Priority and 802.1Q VLAN ID.

STEP 2: The WAN Setup - Summary screen shows a preview of the WAN service you have configured. Check these settings and click **Apply / Save** if they are correct, or click **Back** to return to the previous screen.

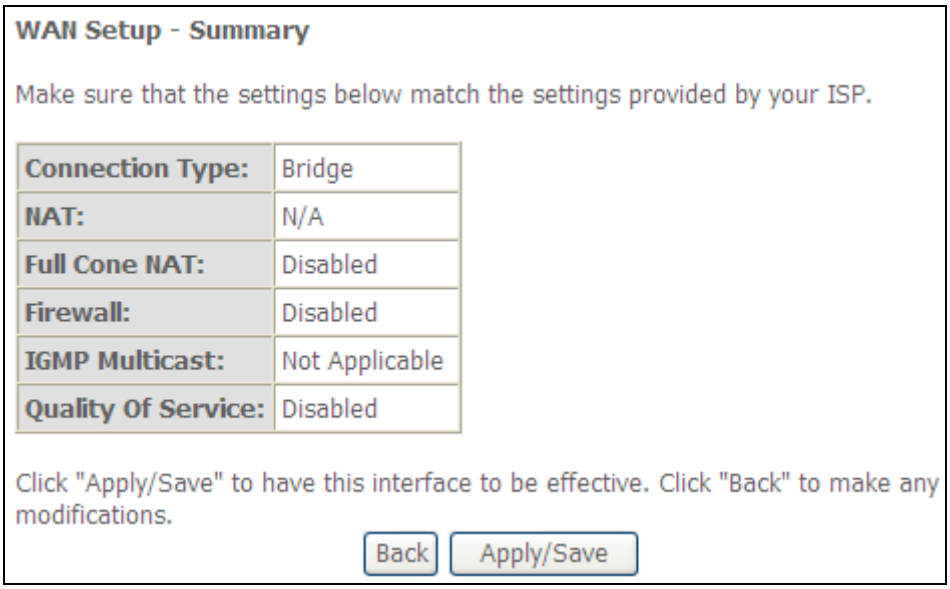

After clicking **Apply / Save**, the new service should appear on the main screen. To activate it you must reboot. Go to Management → Reboot and click **Reboot**.

NOTE:	If this bridge connection is your only WAN service, the VR-3030 will be inaccessible for remote management or technical support from the WAN.

E2.4 PPP over ATM (PPPoA)

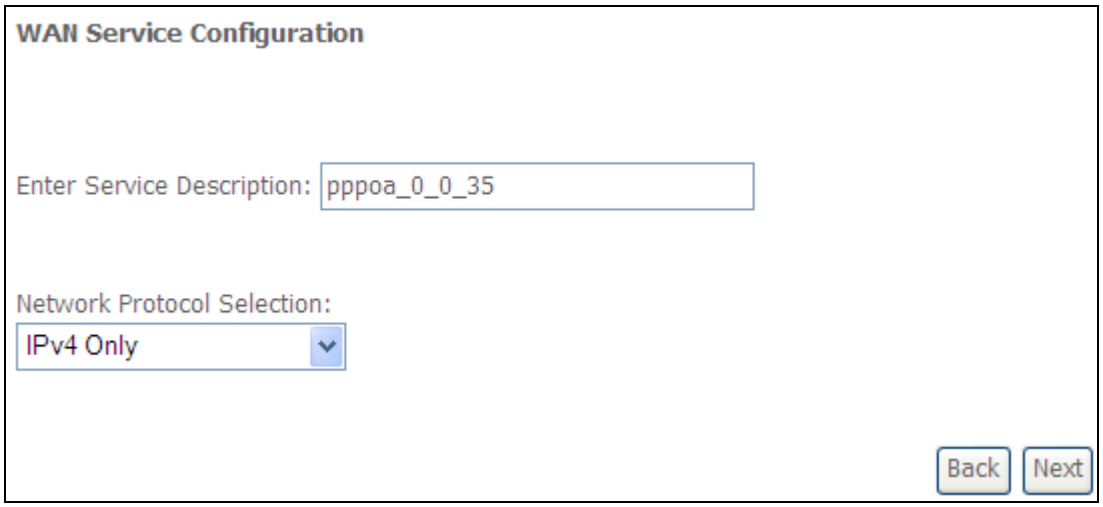

STEP 1: Click **Next** to continue.

STEP 2: On the next screen, enter the PPP settings as provided by your ISP. Click **Next** to continue or click **Back** to return to the previous step.

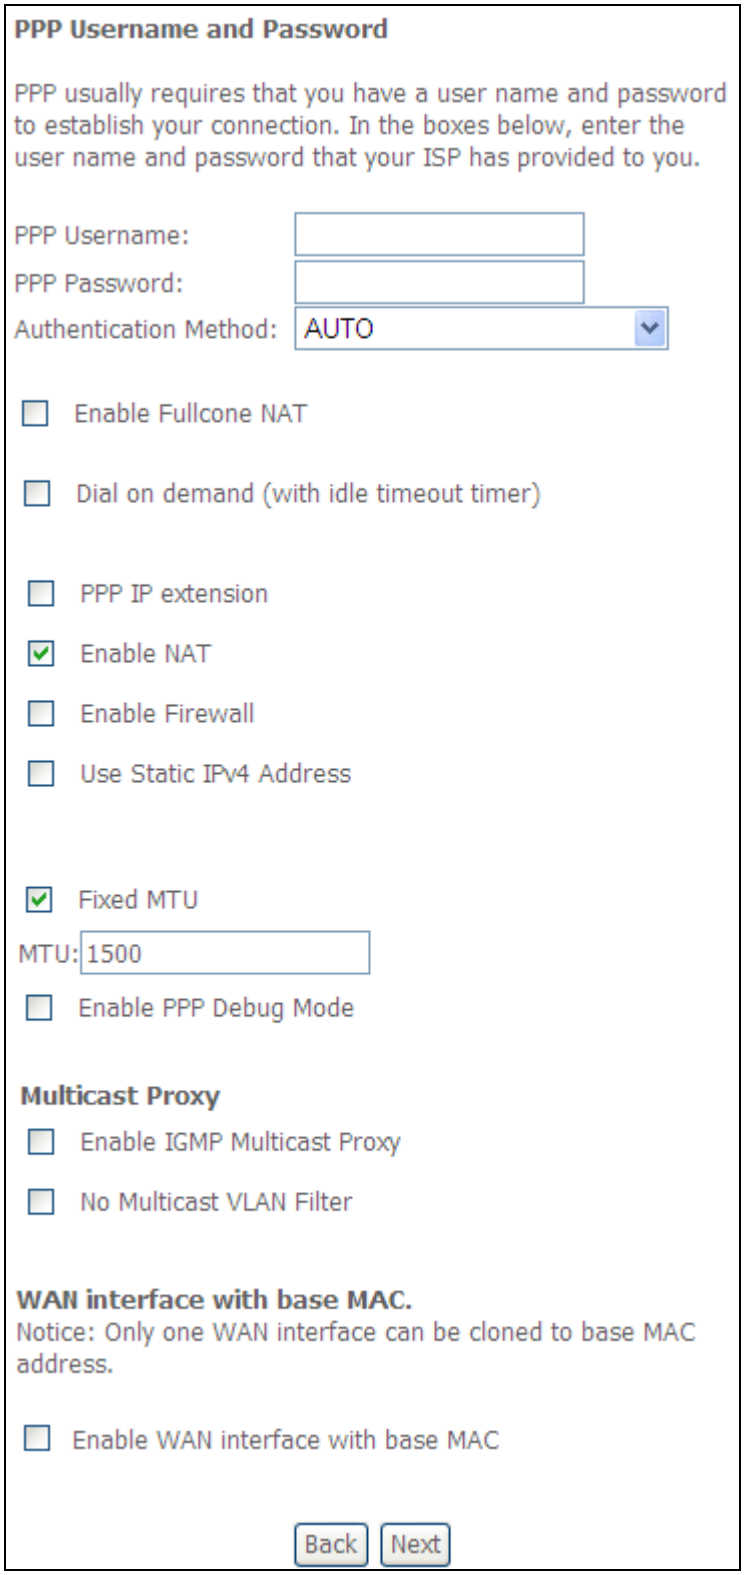

PPP SETTINGS
The PPP username and password are dependent on the requirements of the ISP. The user name can be a maximum of 256 characters and the password a maximum of 32 characters in length. (Authentication Method: AUTO, PAP, CHAP, or MSCHAP.)

KEEP ALIVE INTERVAL

This option configures the interval between each PPP LCP request and the amount of time to wait for the PPP server to reply to the LCP request. If the time expired on all requests, the current PPP session would be dropped.

ENABLE FULLCONE NAT

This option becomes available when NAT is enabled. Known as one-to-one NAT, all requests from the same internal IP address and port are mapped to the same external IP address and port. An external host can send a packet to the internal host, by sending a packet to the mapped external address.

DIAL ON DEMAND

The VR-3030 can be configured to disconnect if there is no activity for a period of time by selecting the **Dial on demand** checkbox ☑. You must also enter an inactivity timeout period in the range of 1 to 4320 minutes.

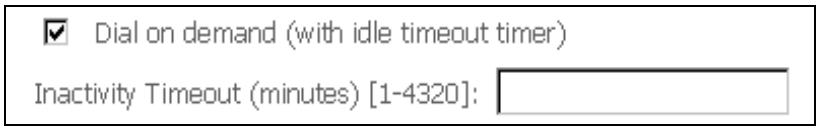

PPP IP EXTENSION

The PPP IP Extension is a special feature deployed by some service providers. Unless your service provider specifically requires this setup, do not select it.

PPP IP Extension does the following:

- Allows only one PC on the LAN.
- Disables NAT and Firewall.
- The device becomes the default gateway and DNS server to the PC through DHCP using the LAN interface IP address.
- The device extends the IP subnet at the remote service provider to the LAN PC. i.e. the PC becomes a host belonging to the same IP subnet.
- The device bridges the IP packets between WAN and LAN ports, unless the packet is addressed to the device's LAN IP address.
- The public IP address assigned by the remote side using the PPP/IPCP protocol is actually not used on the WAN PPP interface. Instead, it is forwarded to the PC LAN interface through DHCP. Only one PC on the LAN can be connected to the remote, since the DHCP server within the device has only a single IP address to assign to a LAN device.

ENABLE NAT

If the LAN is configured with a private IP address, the user should select this checkbox ☑. The NAT submenu will appear in the Advanced Setup menu after reboot. On the other hand, if a private IP address is not used on the LAN side (i.e. the LAN side is using a public IP), this checkbox ☑ should not be selected to free up system resources for better performance.

ENABLE FIREWALL

If this checkbox ☑ is selected, the Security submenu will be displayed on the Advanced Setup menu after reboot. If firewall is not necessary, this checkbox ☑ should not be selected to free up system resources for better performance.

USE STATIC IPv4 ADDRESS
Unless your service provider specially requires it, do not select this checkbox ☑. If selected, enter the static IP address in the **IP Address** field. Also, don't forget to adjust the IP configuration to Static IP Mode as described in section 3.2.

Fixed MTU
Fixed Maximum Transmission Unit. The size (in bytes) of largest protocol data unit which the layer can pass onwards. This value is 1500 for PPPoA.

ENABLE PPP DEBUG MODE
When this option is selected, the system will put more PPP connection information into the system log. This is for debugging errors and not for normal usage.

ENABLE IGMP MULTICAST PROXY
Tick the checkbox ☑ to enable Internet Group Membership Protocol (IGMP) multicast. This protocol is used by IPv4 hosts to report their multicast group memberships to any neighboring multicast routers.

NO MULTICAST VLAN FILTER
Tick the checkbox ☑ to Enable/Disable multicast VLAN filter.

Enable WAN interface with base MAC
Enable this option to use the router's base MAC address as the MAC address for this WAN interface.

STEP 3: Choose an interface to be the default gateway.

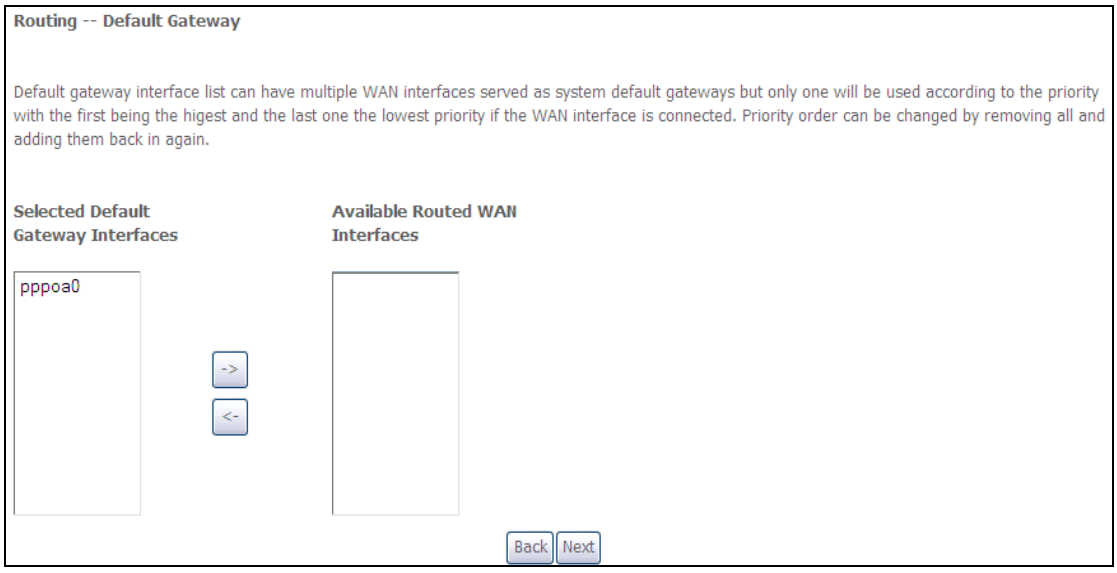

Click **Next** to continue or click **Back** to return to the previous step.

STEP 4: Choose an interface to be the default gateway.

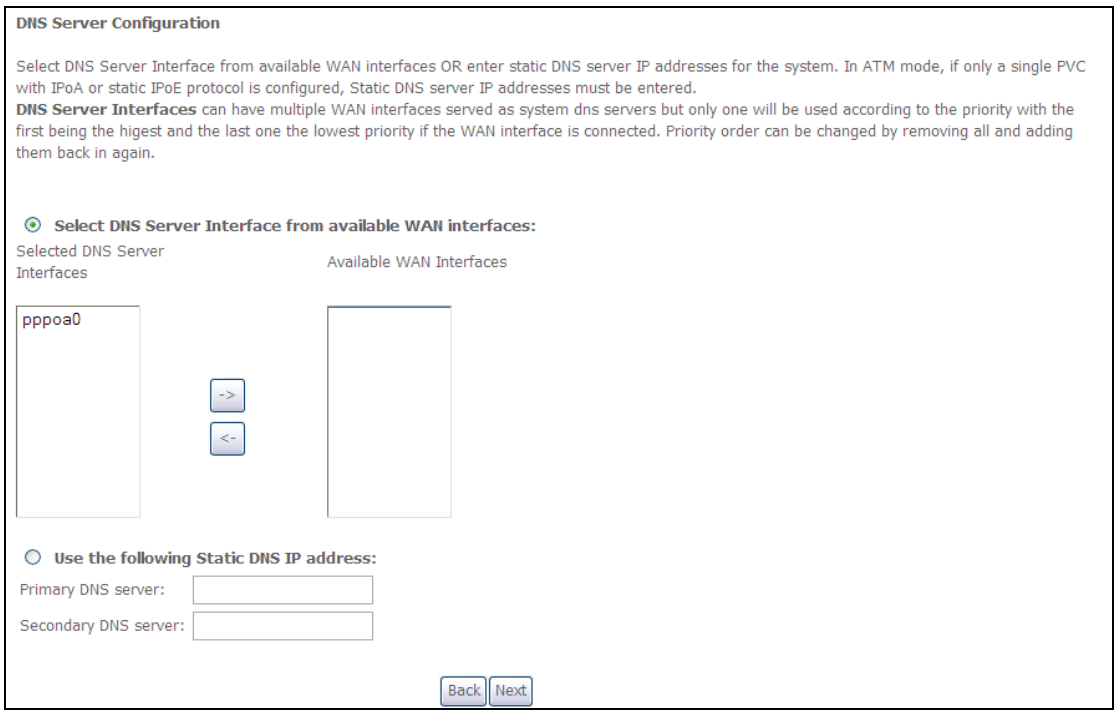

Click **Next** to continue or click **Back** to return to the previous step.

STEP 5: The WAN Setup - Summary screen shows a preview of the WAN service you have configured. Check these settings and click **Apply / Save** if they are correct, or click **Back** to modify them.

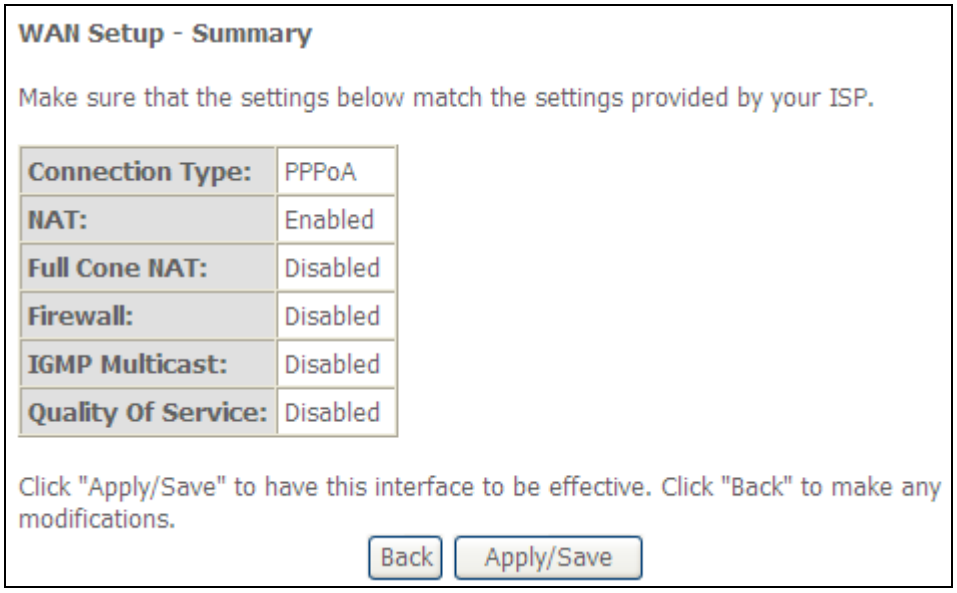

After clicking **Apply / Save**, the new service should appear on the main screen. To activate it you must reboot. Go to Management → Reboot and click **Reboot**.

E2.5 IP over ATM (IPoA)

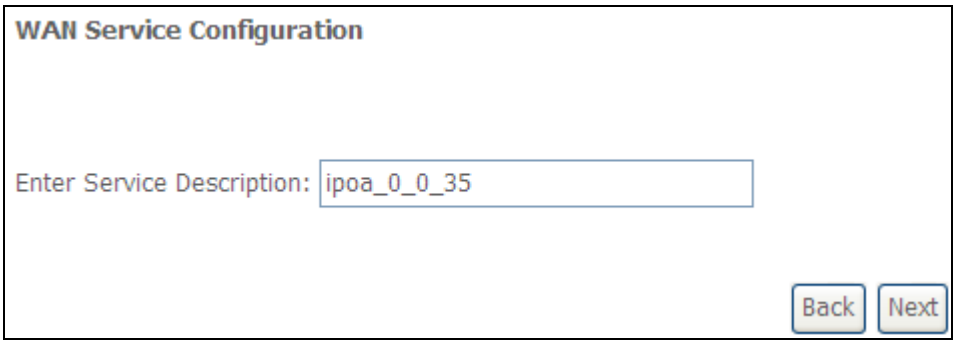

STEP 1: Click **Next** to continue.

STEP 2: Enter the WAN IP settings provided by your ISP. Click **Next** to continue.

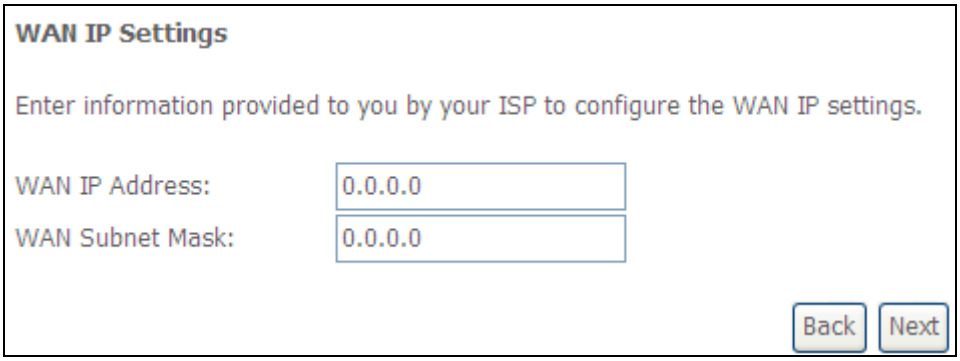

STEP 3: This screen provides access to NAT, Firewall and IGMP Multicast settings. Enable each by selecting the appropriate checkbox ☑. Click **Next** to continue or click **Back** to return to the previous step.

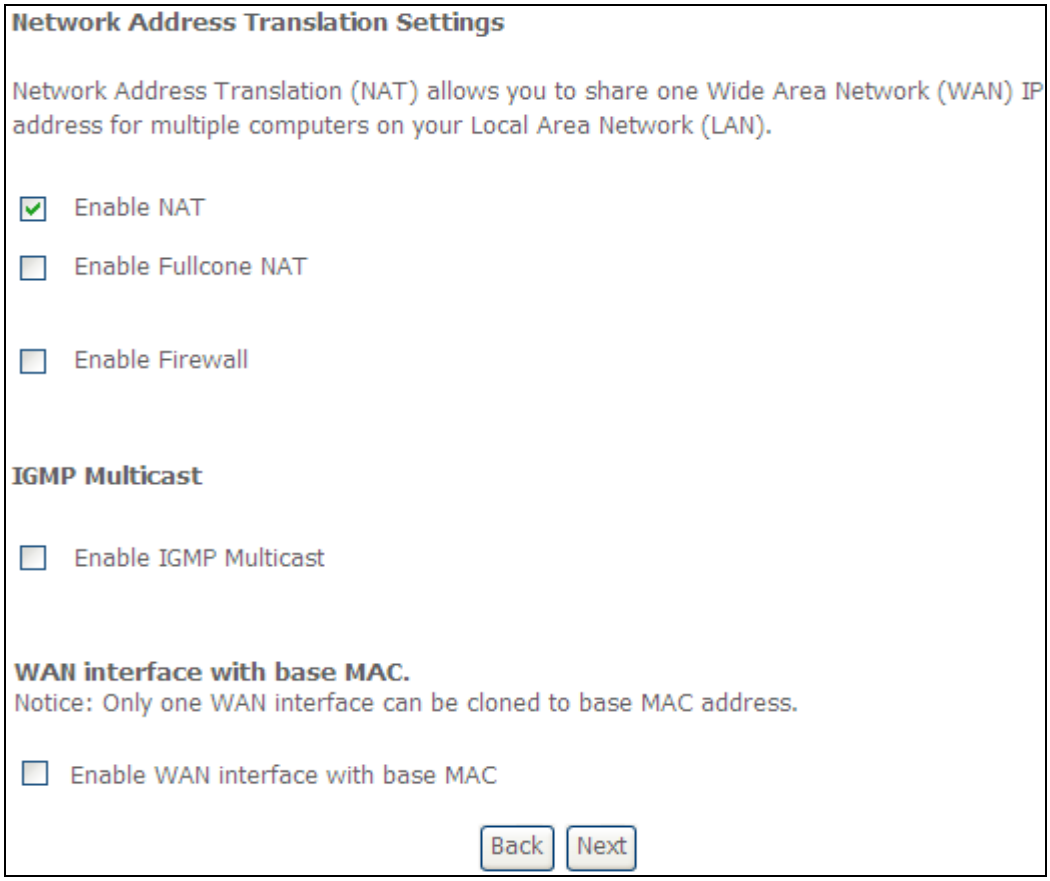

ENABLE NAT
If the LAN is configured with a private IP address, the user should select this checkbox ☑. The NAT submenu will appear in the Advanced Setup menu after reboot. On the other hand, if a private IP address is not used on the LAN side (i.e. the LAN side is using a public IP), this checkbox ☑ should not be selected, so as to free up system resources for improved performance.

ENABLE FULLCONE NAT
This option becomes available when NAT is enabled. Known as one-to-one NAT, all requests from the same internal IP address and port are mapped to the same external IP address and port. An external host can send a packet to the internal host by sending a packet to the mapped external address.

ENABLE FIREWALL
If this checkbox ☑ is selected, the Security submenu will be displayed on the Advanced Setup menu after reboot. If firewall is not necessary, this checkbox ☑ should not be selected so as to free up system resources for better performance.

ENABLE IGMP MULTICAST
Tick the checkbox ☑ to enable Internet Group Membership Protocol (IGMP) multicast. IGMP is a protocol used by IPv4 hosts to report their multicast group memberships to any neighboring multicast routers.

Enable WAN interface with base MAC
Enable this option to use the router's base MAC address as the MAC address for this WAN interface.

STEP 4: Choose an interface to be the default gateway.

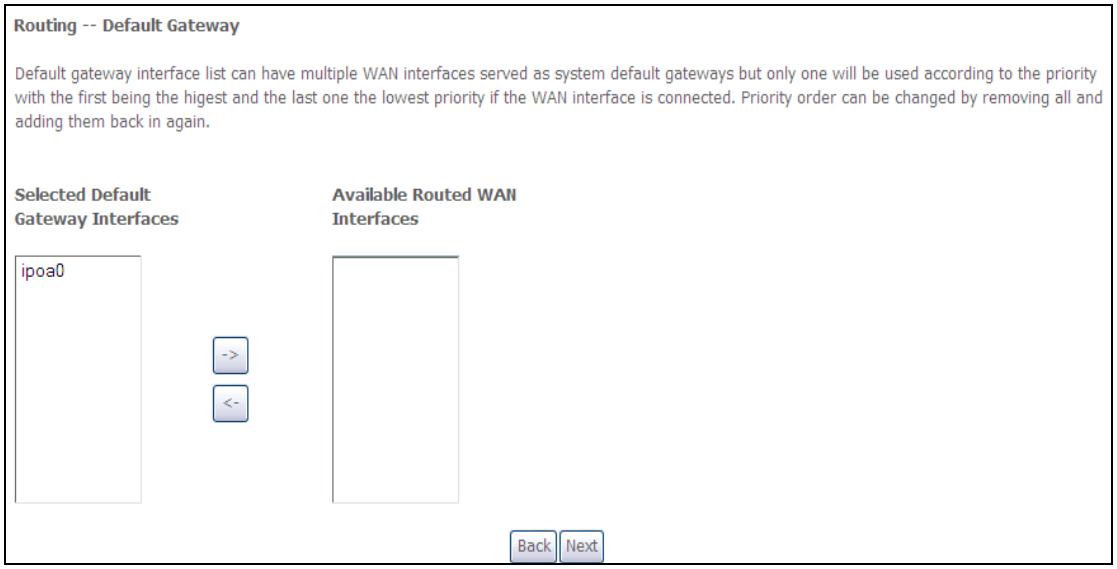

Click **Next** to continue or click **Back** to return to the previous step.

NOTE: If the DHCP server is not enabled on another WAN interface then the following notification will be shown before the next screen.

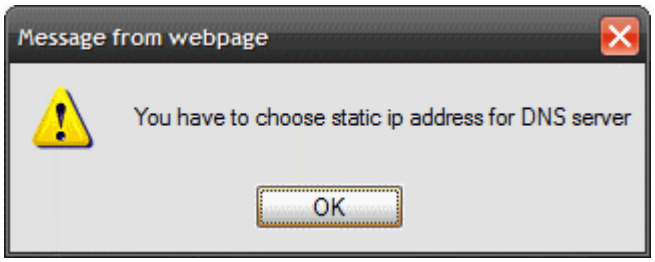

STEP 5: Choose an interface to be the default gateway.

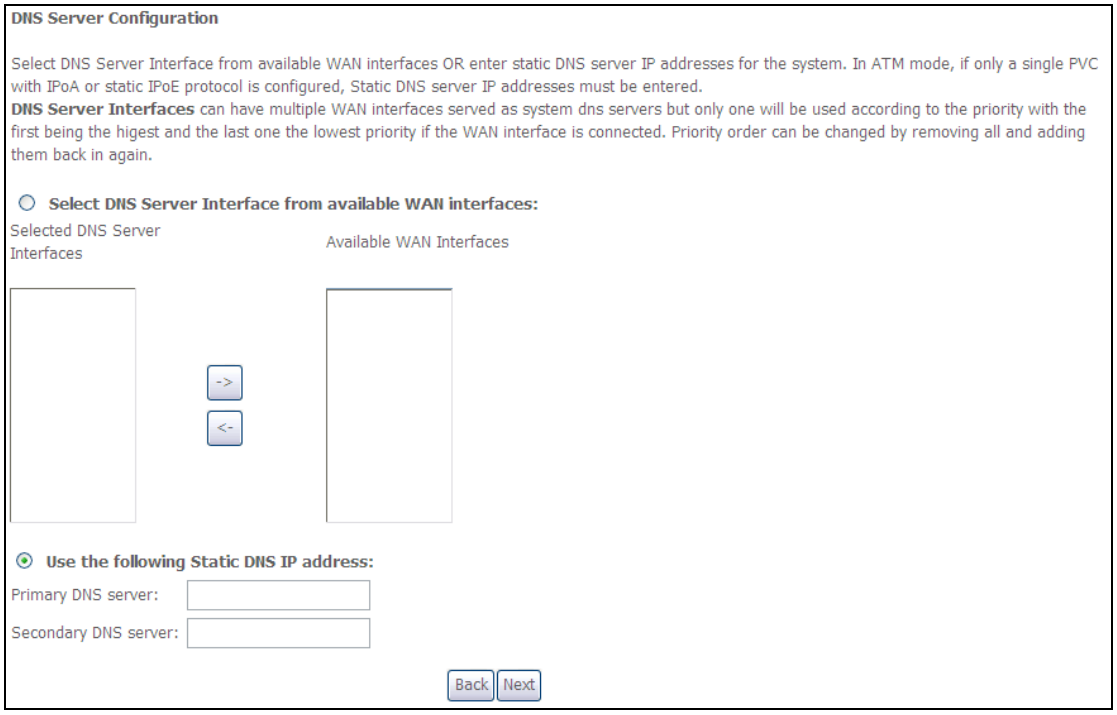

Click **Next** to continue or click **Back** to return to the previous step.

STEP 6: The WAN Setup - Summary screen shows a preview of the WAN service you have configured. Check these settings and click **Apply/Save** if they are correct, or click **Back** to modify them.

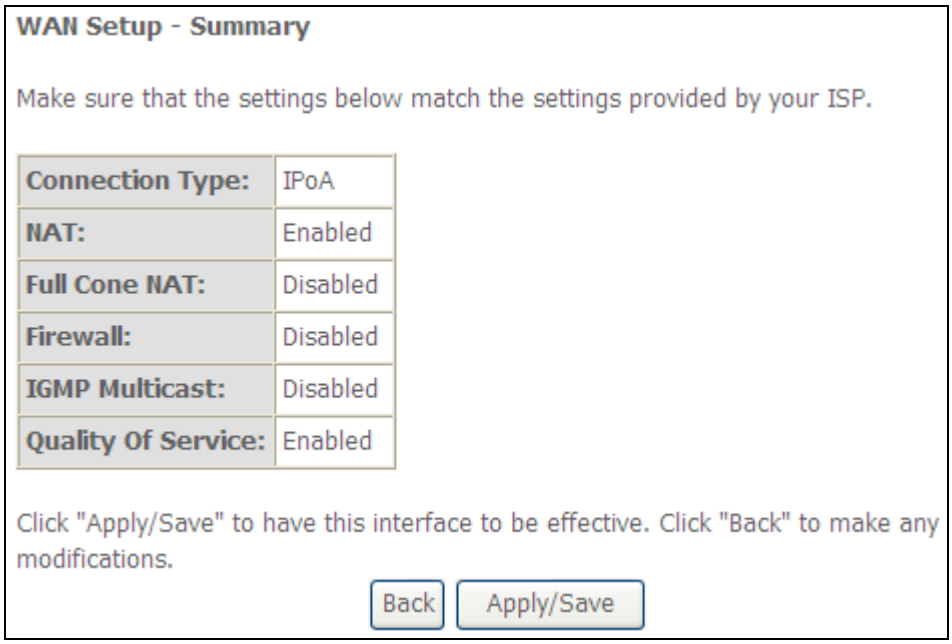

After clicking **Apply/Save**, the new service should appear on the main screen. To activate it you must reboot. Go to Management → Reboot and click **Reboot**.